


The Benchmark of Quality®



**Ranger**  
PRODUCTS

**BP BendPak**

***This is my BendPak***



***There are many, but this one's mine.***

*"If you're going to put your wheels through hell, be sure you've got the rock-solid muscle to bring them back to life. BendPak lifts are built as ruthless as the road itself. Never compromise."*

– Bill Goldberg, Professional Athlete & TV Host

 @Goldberg

**SCAN TO WATCH  
THE VIDEO NOW**



**BendPak®**  
PROVIDING AUTOMOTIVE SERVICE SOLUTIONS

# Table of Contents

4-5	Medium-Duty Clear Floor Lifts
6-7	Medium-Heavy Floor Plate Lifts
8-9	Heavy-Duty Clear Floor Lifts
10-11	4-Post Light-Duty Lifts
12-13	4-Post Standard Lifts
14-15	4-Post Heavy-Duty Lifts
16-17	Alignment Lifts
18	This is my BendPak
19	Image Gallery
20-21	Quatra Scissors
22-23	Low-Rise & Mid-Rise Lifts
24-25	Parking & Storage
26	Rolling Bridge Jacks
27	Portable Column Lift
28-29	Pipe Benders
30-31	Air Compressors
32	RX3040 Touchless Tire Changer
33	Image Gallery
34-35	Tire Changers
36	Tire Repair / Brake Lathes
37	Wheel Balancers / Wheel Aligner
38-39	Floor Jacks / Transmission Jacks
40	Jacks Stands / Wheel Lift
41	Motorcycle Lifts
42	Tool Storage
43	Work Benches
44	Carts & Dollies / Shop Presses
45	Hose Reels
46	Oil Drains / Oil Filter Crushers
47	Parts Washer
48	Small Material Bender / Rolling Creeper / Work Seat / Tire Changers
49	Engine Support / Engine Stand / Shop Crane
50-51	Manufacturing Superiority

## GENERAL DISCLAIMER

BENDPAK/RANGER warrants to the original purchaser only that all products shown in this catalog conform to BENDPAK/RANGER published specifications and are free from defects in material or workmanship. In no event will BENDPAK/RANGER be liable to you or to anyone else for any decision made or action taken by you or anyone else in reliance on information obtained from this catalog. BENDPAK/RANGER has exclusive title and ownership rights, including all intellectual property right, throughout the world in all material and content contained on these pages. Materials, design, specifications, images and other content within this catalog are subject to change. BENDPAK/RANGER does not take responsibility for improper use or any results thereof. BENDPAK/RANGER products are provided and sold as is without any express or implied warranties including warranties of merchantability or fitness for particular purpose. In no event will BENDPAK/RANGER be liable for any special, incidental, or consequential damages based on breach of warranty, breach of contract, negligence, strict tort, or any other legal theory. Damages that BENDPAK/RANGER will not be responsible for include, but are not limited to: loss of profits; loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; and injury to property. This limitation does not apply to damages caused by breach of the warranty of title and against infringements or to claims for personal injury. Unless modified in a writing signed by both parties, it is understood that BENDPAK/RANGER published warranties are to be the complete and exclusive agreement between the parties.

For complete and full warranty details contact BENDPAK/RANGER at 1-805-933-9970 or visit [www.bendpak.com](http://www.bendpak.com)





# Medium-Duty Clear Floor

## SERIES FEATURES:

- Wide or narrow configuration
- Exclusive "Tru-Metric" arms
- Single-point safety release
- Dual "Direct-Drive" cylinders
- Electric / hydraulic power
- 17" x 19" A36 steel base plate
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- Heavy-duty aircraft cable
- Oversized sheave diameter
- Padded safety-shutoff bar
- 8-piece truck and van adapters
- Triple-telescoping / low-pro arms
- Contact pads
- Stackable adapters
- Single piece columns
- Triple-telescoping arms
- Accommodates a wide variety of vehicles assemblies
- Safety locks in each column



**XPR-7TR  
Turf Lift**

Lifting Capacity - 7,000 lbs.  
Max. Lift Height- 73"  
Width - 145" / Height - 145"



**XPR-10  
Clear Floor**

Lifting Capacity - 10,000 lbs.  
Max. Lift Height- 73"  
Width - 132" or 145" / Height - 145"



**XPR-10A  
Asymmetric**

Lifting Capacity - 10,000 lbs.  
Max. Lift Height - 73"  
Width - 132" or 145" / Height - 145"



**XPR-10A** Arms shown with optional foot guards



**2-stage low-profile arms  
featured on LP models**



**XPR-10-168  
Clear Floor Extended Height**

**XPR-10A-168  
Asymmetric Extended Height**

Features bolt-on top  
extension for added  
24" clearance

**XPR-10LP  
XPR-10ALP**  
Feature low-profile arms



## ACCESSORIES:



Steel Lift Pads



Frame Cradle Pads




Offset Adapters




Air / Electric Work Station

### XPR-10A

Shown with air / electric work station and foot guards



**FREE** truck and van adapters come standard with all BendPak 2-post lifts

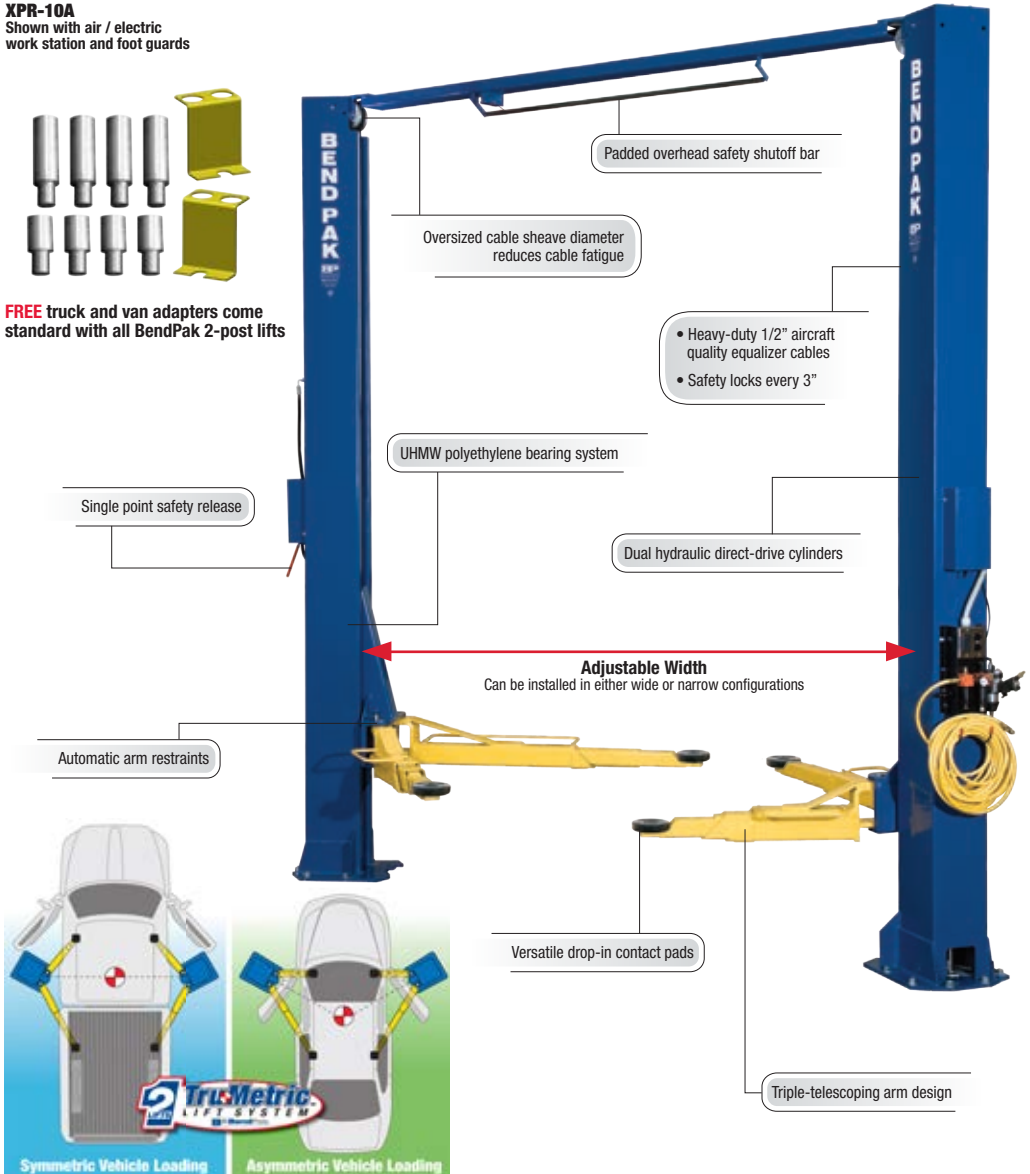


# Medium-Heavy Floor Plate

## SERIES FEATURES:

- Adjustable width design
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms
- Triple-telescoping arms
- Electric / hydraulic system
- UHMW polyethylene bearings
- Dual 3"- spaced safety locks
- Automatic arm restraints
- 8-piece truck and van adapter
- Adjustable wide or narrow drive-thru configurations
- Versatile drop in contact pads
- Durable powder coat finish
- Open top design
- Large steel base plates
- Heavy-duty 3/8" equalizer cables
- Rugged steel construction



Arms shown with optional foot guards



**FREE** truck and van adapters come standard with all BendPak 2-post lifts

**XPR-9LP**  
**XPR-9DLP**  
Feature low-profile arms

**ACCESSORIES:**



Steel Lift Pads



Frame Cradle Pads



Offset Adapters



Air / Electric Work Station

**XPR-9D**  
Shown with air / electric  
work station and foot guards



- Heavy-duty dual 3/8" equalizer cables
- Safety locks every 3"

Oversized cable sheave diameter  
reduces cable fatigue

Dual hydraulic direct-drive cylinders

Single point safety release

UHMW polyethylene bearing system

Automatic arm restraints

Versatile drop-in contact pads

Low profile floor plate

Triple-telescoping arm design



# Heavy-Duty Clear Floor

## SERIES FEATURES:

- Dual-synchro equalization system
- Electric / hydraulic power system
- UHMW polyethylene bearings
- Single-piece columns
- Dual "Direct-Drive" cylinders
- Single point safety release
- Automatic arm restraints
- 8-piece truck and van adapters
- Oversized column base plates
- Padded safety-shutoff bar
- Safety locks in each column
- Heavy-duty 1/2" equalizer cables
- Versatile drop in contact pads with convenient storage
- Triple-telescoping arms / XPR-12C
- Powder coat finish
- Rubber door bumpers
- Oversized base plates



**XPR-12C**



Frame cradle pads come standard

Lifting Capacity - 12,000 lbs.  
Max. Lift Height - 74"  
Width - 155" / Height - 170"



**XPR-15C**



Frame cradle pads come standard

Lifting Capacity - 15,000 lbs.  
Max. Lift Height - 74"  
Width - 155" / Height - 170"




**XPR-18C**



Frame cradle pads come standard

Lifting Capacity - 18,000 lbs.  
Max. Lift Height - 74"  
Width - 155" / Height - 170"

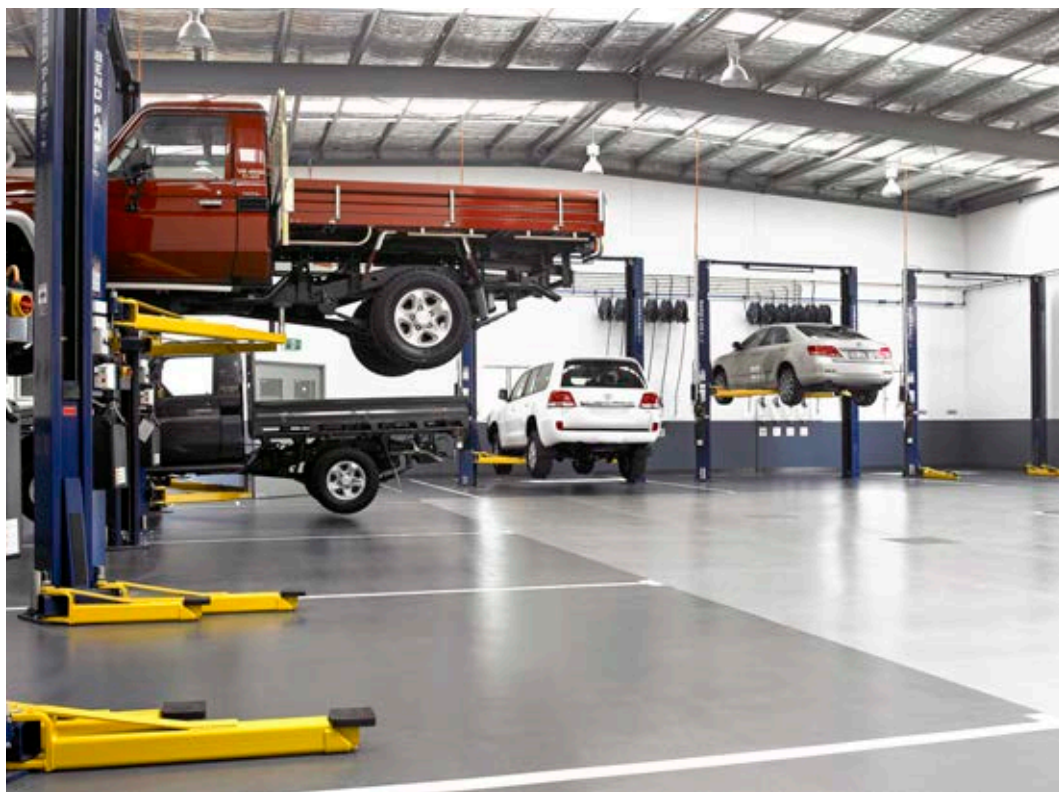

## ACCESSORIES:



Frame Cradle Pads



Mobile High-Lift Jack Stand



Steel Lift Pads



Air / Electric Work Station



**XPR-12C-192**  
**XPR-15C-192**  
**XPR-18C-192**  
 Features bolt on  
 top extension for  
 added 24" clearance



Padded overhead safety shutoff bar

Oversized cable sheave diameter  
 reduces cable fatigue

- Heavy-duty 1/2" aircraft-quality equalizer cables
- Safety locks every 3"

Automatic arm restraints

UHMW polyethylene bearing system


Durable rubber lift pads

Dual hydraulic direct-drive cylinders

Adapter storage

Oversized A36 steel base plates

Single point safety release




**FREE** truck and van adapters come  
 standard with all BendPak 2-post lifts

**XPR-15C**  
 Shown with  
 optional equipment

# 4-Post Light-Duty

## SERIES FEATURES:

- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Features heavy-duty 3/8" aircraft cable
- Internal "anti-sway" slider blocks in each column
- Electric / hydraulic power system
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available
- Durable powder coat finish
- Rugged steel construction

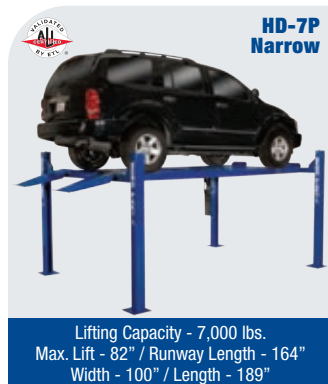



**ACCESSORIES:**




Jack Platform



Air / Electric Work Station



RJ-45 Rolling Bridge Jack




Aluminum Deck



Drip Trays

**HD-7PXW**

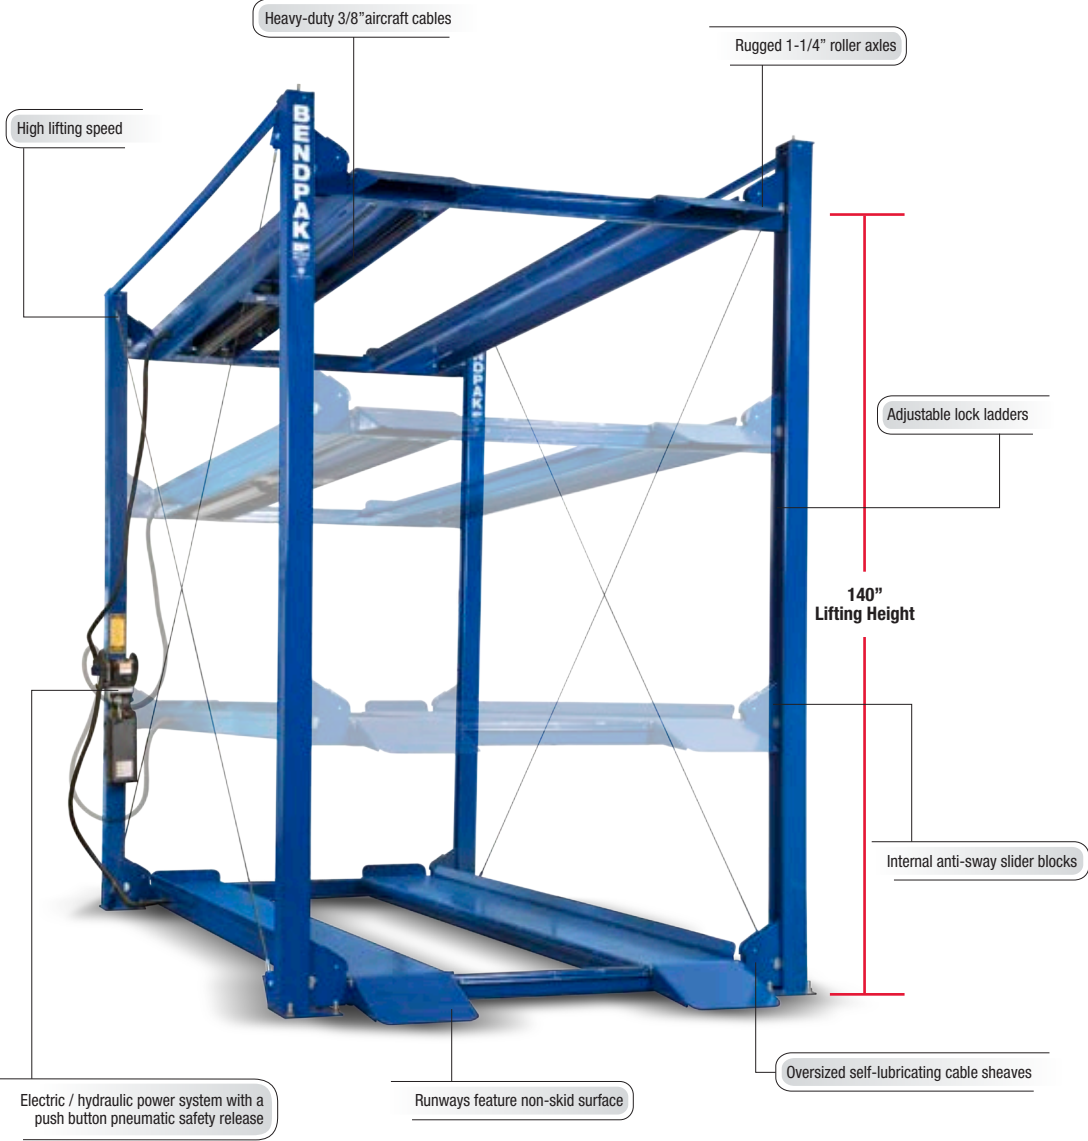

# 4-Post Standard

## SERIES FEATURES:

- Freestanding or bolt-down design
- Runways feature non-skid surface
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features 1-1/4" sheave axles
- Internal "anti-sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 36" approach ramps available



**HD-9**  
**Wide Standard**

Lifting Capacity - 9,000 lbs.  
Max. Lift - 70" / Runway Length - 164"  
Width - 110" / Length - 200"



**HD-9ST**  
**Narrow Standard**

Lifting Capacity - 9,000 lbs.  
Max. Lift - 70" / Runway Length - 164"  
Width - 100" / Length - 200"



**HD-9STX**  
**Narrow Tall Long**

Lifting Capacity - 9,000 lbs.  
Max. Lift - 82" / Runway Length - 188"  
Width - 100" / Length - 224"



**HD-9XW**  
**Wide Tall Long**

Lifting Capacity - 9,000 lbs.  
Max. Lift - 82" / Runway Length - 188"  
Width - 110" / Length - 224"



**HD-9XL**  
**Wide Standard Long**

Lifting Capacity - 9,000 lbs.  
Max. Lift - 70" / Runway Length - 188"  
Width - 110" / Length - 224"



## ACCESSORIES:




Jack Platform



Air / Electric Work Station



RJ-45 Rolling Bridge Jack



Aluminum Deck



Drip Trays

### HD-9SW Double Wide Standard



Lifting Capacity - 9,000 lbs.  
Max. Lift - 70" / Runway Length - 164"  
Width - 206" / Length - 200"

### HD-9SWX Double Wide Tall Long



Lifting Capacity - 9,000 lbs.  
Max. Lift - 82" / Runway Length - 188"  
Width - 206" / Length - 224"



## HD-9 Series

Oversize self-lubricating cable sheaves

Independent backup slack-cable safety latches

Optional rolling bridge jacks

Longer approach ramps

- Push button pneumatic safety release
- Electric/hydraulic power system
- Optional power unit locations

Adjustable lock ladders

Rugged 1-1/4" roller axes

- Heavy-duty 3/8" aircraft cables
- Multi-position safety locks



See it on the BendPak / Ranger YouTube Page



## 4-Post Heavy-Duty

### SERIES FEATURES:

- Adjustable runway widths
- Single hydraulic cylinder under ramp
- Fully enclosed lifting cables, safety locks and sheaves
- Pneumatic push-button safety release
- Features heavy-duty aircraft cable
- Runways feature non-skid surface
- Internal "anti-sway" slider blocks in each column
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameters
- Rugged, self-lubricating cable sheaves
- Features heavy-duty sheave axles
- Multi-position safety locks in columns
- Dual-position power unit locations
- Redundant slack-cable safety latches
- Fully adjustable lock leveling stops
- Drive through ramps option available
- 48" approach ramps available



**HDS-14  
Standard**

Lifting Capacity - 14,000 lbs.  
Max. Lift - 70" / Runway Length - 199"  
Width - 130" / Length - 241"



**HDS-14X  
Extended Length**

Lifting Capacity - 14,000 lbs.  
Max. Lift - 70" / Runway Length - 229"  
Width - 130" / Length - 271"



**HD-14T  
Super Tall**

Lifting Capacity - 14,000 lbs.  
Max. Lift - 82" / Runway Length - 199"  
Width - 130" / Length - 241"



**HDSO-14  
Open Front Plain Deck**

Lifting Capacity - 14,000 lbs.  
Max. Lift - 70" / Runway Length - 199"  
Width - 143" / Length - 244"



**HDS-18**

Lifting Capacity - 18,000 lbs.  
Max. Lift - 60" / Runway Length - 203"  
Width - 154" / Length - 241"




**HDS-18X**

Lifting Capacity - 18,000 lbs.  
Max. Lift - 60" / Runway Length - 203"  
Width - 154" / Length - 323"



**HDS-27**

Lifting Capacity - 27,000 lbs.  
Max. Lift - 60" / Runway Length - 263"  
Width - 154" / Length - 297"



**HDS-27X**


Lifting Capacity - 27,000 lbs.  
Max. Lift - 60" / Runway Length - 323"  
Width - 154" / Length - 357"




**HDS-35**

Lifting Capacity - 35,000 lbs.  
Max. Lift - 60" / Runway Length - 263"  
Width - 154" / Length - 297"

## ACCESSORIES:



Rolling Bridge Jacks



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



**HDS-35X**



Lifting Capacity - 35,000 lbs.  
Max. Lift - 60" / Runway Length - 323"  
Width - 154" / Length - 357"

**HDS-40**




Lifting Capacity - 40,000 lbs.  
Max. Lift - 60" / Runway Length - 263"  
Width - 154" / Length - 297"

**HDS-40X**



Lifting Capacity - 40,000 lbs.  
Max. Lift - 60" / Runway Length - 323"  
Width - 154" / Length - 357"

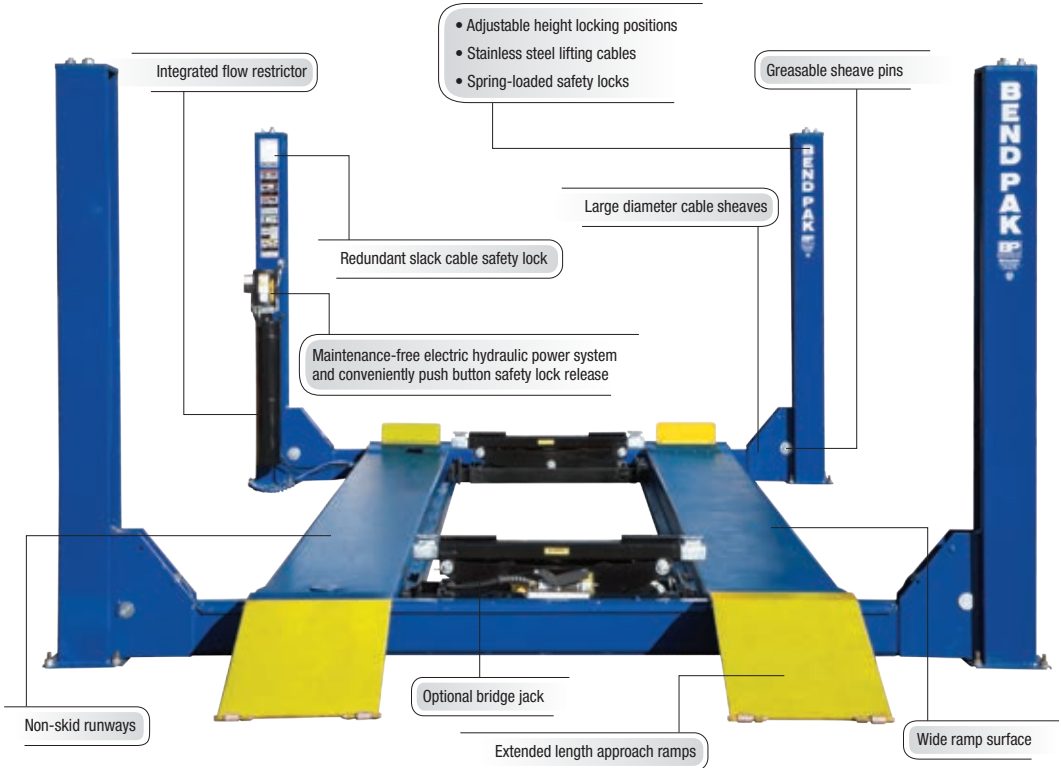

## Alignment Lifts

### SERIES FEATURES:

- Runways adjust to different widths
- Multi auto-level locking positions
- Single hydraulic cylinder
- Fully enclosed lifting cables and sheaves
- Pneumatic push-button safety release
- Heavy-duty aircraft cable
- Runways feature non-skid surface
- Self-lubricating cable sheaves
- Oversized sheave diameter
- Features heavy-duty sheave axles
- Fully adjustable lock stops
- Drive through ramps available
- Rolling bridge airline kit available
- Roll back kit available



Equipped with rear slip plates and galvanized front turn plates

#### HD-9AE



Max. 2 Wheel Align. - 160" / Max. Lift - 70"  
Capacity - 9,000 lbs. / Runway Length - 188"  
Width - 127" / Length - 224"



#### HDSO-14LSX Open Front



Max. 2 Wheel Align. - 182" / Max. Lift - 70"  
Capacity - 14,000 lbs. / Runway Length - 199"  
Width - 143" / Length - 244"



#### HDS-14LSX



Max. 2 Wheel Align. - 182" / Max. Lift - 70"  
Capacity - 14,000 lbs. / Runway Length - 199"  
Width - 130" / Length - 241"



#### HDS-14LSXE



Max. 2 Wheel Align. - 212" / Max. Lift - 70"  
Capacity - 14,000 lbs. / Runway Length - 229"  
Width - 130" / Length - 271"



#### HDS-18A



Max. 2 Wheel Align. - 151" / Max. Lift - 60"  
Capacity - 18,000 lbs. / Runway Length - 203"  
Width - 154" / Length - 241"



#### HDS-18XA



Max. 2 Wheel Align. - 151" / Max. Lift - 60"  
Capacity - 18,000 lbs. / Runway Length - 203"  
Width - 154" / Length - 323"



Courtesy of Jay Leno's Big Dog Garage




#### HDS-27A




Max. 2 Wheel Align. - 211" / Max. Lift - 60"  
Capacity - 27,000 lbs. / Runway Length - 263"  
Width - 154" / Length - 297"



## ACCESSORIES:



Rolling Bridge Jacks



DP-30 Rolling Oil Drain



Air / Electric Work Station



Rolling Bridge Airline Kit



### HD-9AE Shown with rolling bridge jacks

- Single hydraulic cylinder
- Simple push-button lock release
- Maintenance-free power system
- Easy-to-reach operator controls

Integrated hydraulic flow restrictor

Non-skid approach ramps

Full floating galvanized turn plates

Non-skid runways

Optional bridge jack

Dual-hub cable sheaves

Recessed full floating slip plates

Durable powder coat finish

- Adjustable height locking positions
- Stainless steel lifting cables
- Spring-loaded safety locks



***This is my BendPak***

***There are many,  
but this one's mine.***

*"Nothing I do or drive is stock. Everything that comes out of my shop has to be the best. That's why me and my crew use BendPak products to customize every vehicle we touch. It's a name I trust."*



— Jesse James, West Coast Choppers  
[www.westcoastchoppers.com](http://www.westcoastchoppers.com)







# Quatra Scissors

**SERIES FEATURES:**

- 12,000 lbs. lifting capacity
  - Extended runway
  - Durable powder coat finish
  - Multi position runway work steps
  - Non-skid runways for sure grip
  - Electric / hydraulic power system
  - Integrated velocity fuses for cylinders
- Power console with simple controls
  - Open center design
  - Automatic leveling system
  - Pneumatic push button release
  - Lubricated bearing on all pivot points
  - Rugged steel legs
  - Can be flush mounted or recessed
- Easy to use and understand
  - High efficiency hydraulic power unit
  - Equipped with rear slip plates and galvanized front turn plates
  - Straight up vertical lifting

**XR-12000A**  
Alignment



See it on the BendPak / Ranger YouTube Page


MODEL	XR-12000A Alignment	XR-12000 Standard
Lifting Capacity	12,000 lbs.	12,000 lbs.
Overall Width	86"	86"
Overall Length	243"	215"
Runway Width	24"	24"
Length of Runways	220"	192"
Max. 2-Wheel Align.	194"	N/A"
Max. Lifting Height	74"	74"



**ACCESSORIES:**



**Rolling Bridge Jacks**



**DP-30 Rolling Oil Drain**



**Air / Electric Work Station**



**Rolling Bridge Airline Kit**



**Optional RJ-6 6,000 lb. capacity rolling bridge jacks**



**XR-12000  
Standard Deck**

# Low-Rise & Mid-Rise

## STANDARD FEATURES:



**MD-6XP Model**  
Multi Piece Adapter Set



**SP-7X & All Low-Rise Models**  
1.5 inch Rubber Lift Blocks



**Portable Models**  
Mobile Power Cart



**LR-5T**  
Low-Rise

Lift Pad Dimensions - 24" x 53"  
Capacity - 10,000 lbs.  
Height Range - 4" - 22.75"



**MD-6XP**  
Mid-Rise Portable


Adjustable Arms  
Capacity - 6,000 lbs.  
Height Range - 5" - 48"



**LR-60**  
Low-Rise

Lift Pad Dimensions - 18" x 53"  
Capacity - 6,000 lbs.  
Height Range - 4" - 26"


### MD-6XP

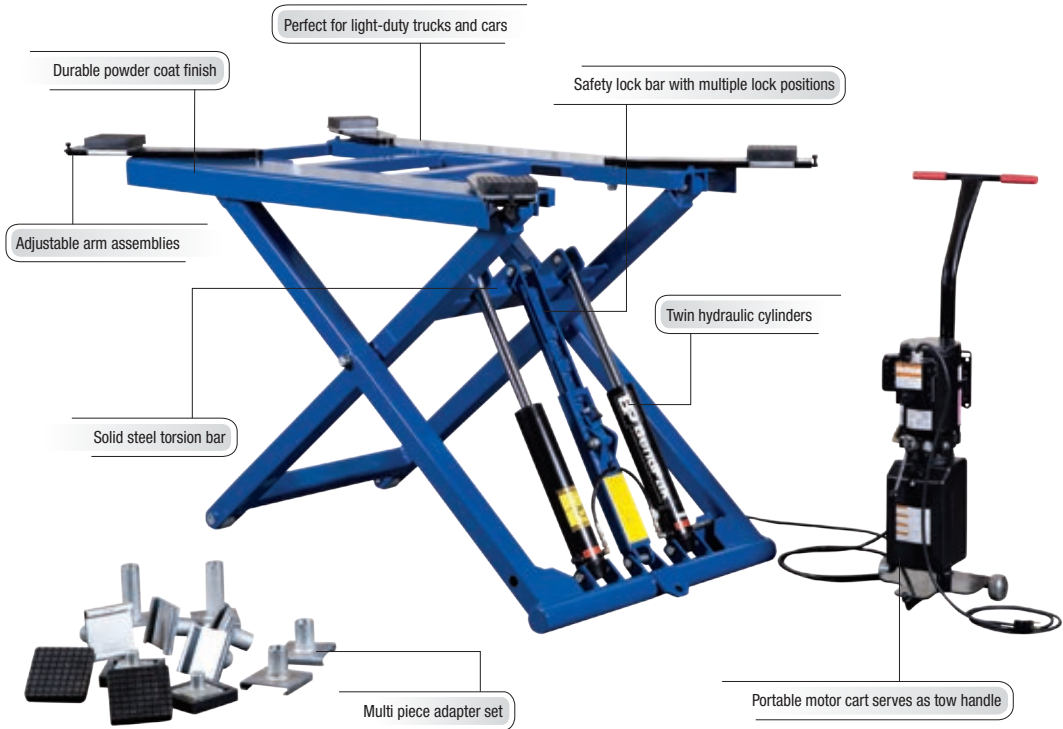

## ACCESSORIES:




1.5" Rubber Lift Blocks



3" Rubber Lift Blocks



6" Rubber Lift Blocks



LR-4A Arm Kit

### LR-60P Low-Rise Portable



Lift Pad Dimensions - 18" x 53"  
Capacity - 6,000 lbs.  
Height Range - 4" - 26"



### P-6B Open Center Pit Lift



Lift Pad Dimensions - 18" x 53"  
Capacity - 6,000 lbs.  
Height Range - 4" - 26"



### P-6FB Open Center Pit Lift Flush Mount



Lift Pad Dimensions - 18" x 53"  
Capacity - 6,000 lbs.  
Height Range - 4" - 26"

### SP-7X Full Rise



Lift Pad Dimensions - 21" x 63" - 70"  
Capacity - 7,000 lbs.  
Height Range - 5" - 68"

Courtesy of Northwest Auto Salon



### XR-12000 Full-Rise Open Center



Lifting Capacity - 12,000 lbs.  
Max. Lift - 74" / Runway Length - 192"  
Width - 86" / Length - 249"

Courtesy of Northwest Auto Salon



# Parking & Storage

## SERIES FEATURES:

- Perfect for cars & light trucks
- Single hydraulic cylinder
- Dependable hydraulic design
- Easy operation
- Electric / hydraulic power system
- Automatic safety locks
- Wide deck platform for large vehicles



**PLT-6S**



Capacity - 6,000 lbs.  
Rise - 62" / Deck Length - 135"  
Width - 99" / Length - 154"

**PL-6000**



Capacity - 6,000 lbs.  
Rise - 73" / Deck Length - 158"  
Width - 110" / Length - 168"

**PL-6000X**



Capacity - 6,000 lbs.  
Rise - 85" / Deck Length - 158"  
Width - 110" / Length - 168"

**PL-7000XR**



Capacity - 7,000 lbs.  
Rise - 85" / Deck Length - 158"  
Width - 98" / Length - 174"

**PL-14000**



Capacity - 7,000 lbs. Per Deck  
Overall Height - 280" / Deck Length - 155"  
Width - 114" / Length - 193"

**HDS-35PX**



Capacity - 35,000 lbs.  
Rise - 168" / Deck Length - 399"  
Width - 186" / Length - 456"



**PL-18000**



Capacity - 6,000 lbs. Per Deck  
Overall Height - 364" / Deck Length - 181"  
Width - 114" / Length - 189"



## GALLERY:



### PL-7000XR

Minimum footprint allows multiple installations in limited space

- Overhead power unit provides smooth quiet hydraulic operation
- Power unit and controls integrated within the lift structure
- Automatic safety lock


Wide deck platform accommodates pickups, vans, and cars

Maintenance-free composite carriage bearings and self-lubricating chain rollers

Heavy-duty lifting chains

Designed for installation on typical parking surfaces

Wide-base plate mounts directly on ground or asphalt

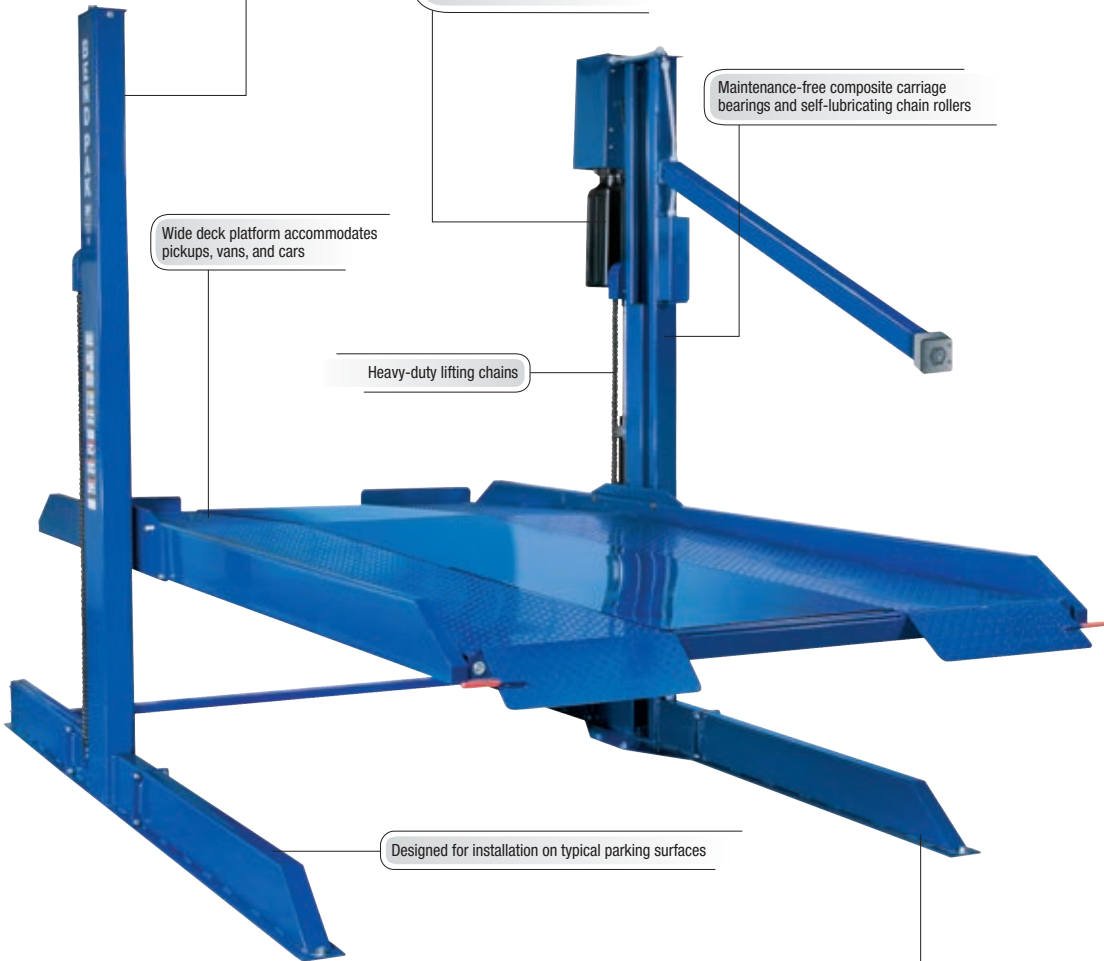

# Rolling Bridge Jacks

## SERIES FEATURES:

- 4,500 - 25,000 lbs. lifting capacity
- Versatile drop in lifting pads
- Multi-piece adapter set standard
- Air hydraulic power unit
- Stackable adapters
- Automatic safety locks
- Wheel frame assembly for easy mobility



**RJ-45**



Lifting Capacity - 4,500 lbs.  
Lift Pad Reach - 41" - 60"  
Frame Reach - 36" - 47"

**RJ-6**



Lifting Capacity - 6,000 lbs.  
Lift Pad Reach - 41" - 60"  
Frame Reach - 36" - 47"

**RJ-7**



Lifting Capacity - 7,000 lbs.  
Lift Pad Reach - 41" - 60"  
Frame Reach - 36" - 47"

**RJ-9**



Lifting Capacity - 9,000 lbs.  
Lift Pad Reach - 42" - 61"  
Frame Reach - 45" - 50"

**RJ-15**



Lifting Capacity - 15,000 lbs.  
Lift Pad Reach - 29" - 59"  
Frame Reach - 46" - 59"

**RJ-18**



Lifting Capacity - 18,000 lbs.  
Lift Pad Reach - 40" - 64"  
Frame Reach - 45"

**RJ-25**



Lifting Capacity - 25,000 lbs.  
Lift Pad Reach - 40" - 64"  
Frame Reach - 45"

**RJ-45**



# Portable Column Lift

## SERIES FEATURES:

- 18,000-lb. individual column capacity
- 108,000-lb. maximum system capacity
- SINGLE, PAIR or TEAM operation
- Three 30' cables are used leaving the front or back of the lift clear of cables
- Self-diagnostics and self-calibration
- Control systems feature 24-volt circuitry
- Variable height limit settings
- Two-speed lowering option settings
- Equipped with a warning light and audible alarm for critical warning alerts
- Emergency shut off's on each column
- Key lock enclosure on each column
- Electronics are multi-fuse protected
- Enclosed electric-hydraulic power system
- Pallet-jack style steering wheels
- Extended forks accommodate wide tires and deep wheel configurations
- Multi-width wheel forks with locking pins
- Tandem 8" diameter polyurethane covered steel wheels

### PCL-18



# Pipe Benders

## SERIES FEATURES:

- 3-1/2" Min. bending radius
- 5" Max. bending radius
- Canister style hydraulic filter
- 5 Hp / 208 - 230 VAC motor
- Manual or automatic controls
- Drop-in swaging collars
- Twist lock tooling
- ANSI 92.2 Cylinders
- Quick release bending dies
- Bending heads to within .002"
- Bending and end finishing operation
- Adjustable back gate pressure
- 180° bending capacity
- One piece solid steel barrel
- Direct drive high speed 4 GPM pump
- Tool trays
- Large fluid reservoir
- Filtered hydraulic system
- Oil sight gauges
- 1/2" high pressure hose
- Wide variety of tooling available

### BB-1



Bending Controls - Manual  
Clampless Swager - Internal Expander  
BB-1 Die Package Available

### 1302BA-202 1302BA-302



Bending Controls - Digital Automatic  
Clampless Swager - Internal Expander  
202 or 302 Die Package Available

### 1502BA-202 1502BA-302



Bending Controls - Digital Automatic  
Clampless Swager - Internal Expander  
202 or 302 Die Package Available

### BB-2



Bending Controls - Manual  
Clampless Swager - Internal Expander  
BB-2 Die Package Available

### 1302BAS-202 1302BAS-302



Bending Controls - Semi-Automatic  
Clampless Swager - Internal Expander  
202 or 302 Die Package Available


### 1502BAS-202 1502BAS-302



Bending Controls - Semi-Automatic  
Clampless Swager - Internal Expander  
202 or 302 Die Package Available



### BB-1 / 202 DIE PACKAGE



BB-1 / 202 Economy Die Package  
Bending and End Forming Tooling  
Sizes - 1-1/2" - 1-3/4" - 2" - 2-1/4" - 2-1/2"

### BB-2 / 302 DIE PACKAGE



BB-2 / 302 Economy Die Package  
Bending and End Forming Tooling  
Sizes - 1-1/2" - 1-3/4" - 1-7/8" - 2" - 2-1/4" - 2-1/2"



## ACCESSORIES:



Specialty Tooling  
Available Upon Request



300-1 Die Package



300-2 Die Package




Card System CD



Rotation Dial




**BB Series / 1302 Series**  
Top View

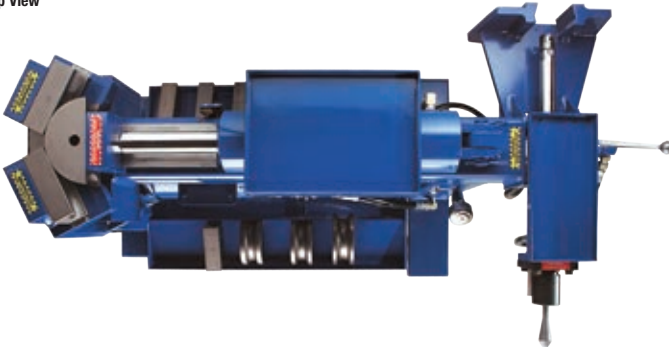

BAS Semi-Automatic Controls

**1502 Series**  
Top View

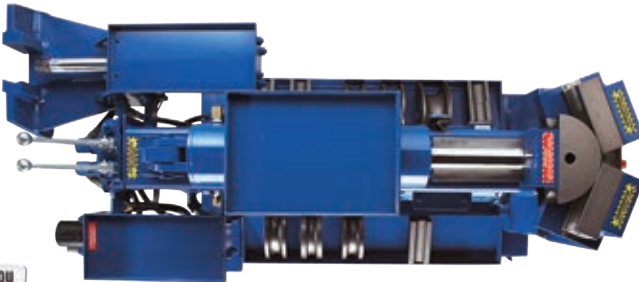

BA Digital Automatic Controls



See it on the BendPak / Ranger YouTube Page

# Air Compressors

## SERIES FEATURES:

- 80-Gallon vertical tank
- 3-Cylinder / 2-stage pump
- ASME rated tank
- Siemens™ electric mag-starter
- Fan-type flywheel
- Fully-enclosed belt guard
- Oversized roller bearings
- Forged ductile iron crankshaft
- Forged aluminum alloy pistons and connecting rods
- 100% cast iron block
- Cast iron cylinders and heads with deep cooling fins
- Forced-air after cooler
- Oil sight gauge
- Automatic pressure switch
- ASME rated overload pressure safety valve
- Pressure gauge with valve
- Oversized replaceable air filters
- Automatic start / stop

## 5 HP MODELS

## 7.5 HP MODELS



Pump cutaway

The 100% cast-iron TRI-MAX™ Series pump features simple splash lubrication for total reliability and a “W-3” finned cylinder configuration that provides 360° cooling. Lower RPM's and large-diameter finned copper tubing between stages, means they will run cooler, which ultimately achieves maximum compressor efficiency with less moisture contamination.

**LS580V-601** / 208-230 V / 60 Hz / 1 Ph  
**LS580V-603** / 208-460 V / 50-60 Hz / 3 Ph  
 Horsepower - 5 Hp  
 Maximum CFM - 22.8 / 175 psi

**LS7580V-601** / 208-230 V / 60 Hz / 1 Ph  
**LS7580V-603** / 208-460 V / 50-60 Hz / 3 Ph  
 Horsepower - 7.5 Hp  
 Maximum CFM - 28.5 / 175 psi


Large “Finned” copper tubing helps keeps air cool between stages and to tank

Cast iron heads

Oversized balanced flywheel features large fan blades that forces cool air on the compressor pump

Deep cooling fins on the cast iron cylinders help maintain a lower operating temperature

Large mass-air filters

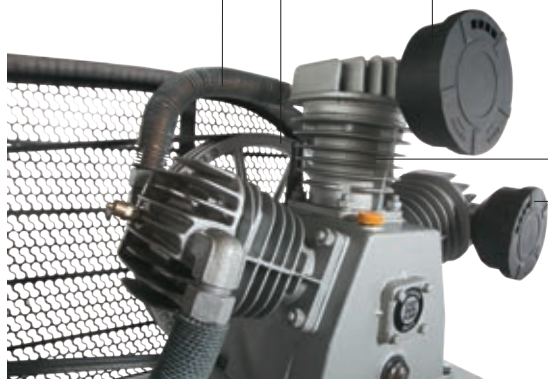

**Tri-Max<sup>2</sup>**  
 Extreme Duty  
 Industrial-Grade Air Compressor


**ACCESSORIES:**



Moisture Minder®



Moisture Minder® Kit



Anti-Vibration Pads

**TriMax™ Reciprocating  
Air Compressors**

**HUSH™ Quiet.**



IF IT GOT ANY  
**EASIER,**  
THE TIRE  
WOULD CHANGE  
**ITSELF.**



**TOUCHLESS**  
**RX3040**  
**TIRE CHANGER.**

- Never scratch another expensive rim
- Save time, increase profits
- Simple to learn, easy to master

**ALL FOR MUCH LESS  
THAN YOU'D EXPECT.**

[www.bendpak.com/rx3040](http://www.bendpak.com/rx3040)  
**1-805-933-9970**

ADVANCED, STATE  
OF THE ART FEATURES



**TOUCHLESS, LEVERLESS  
ASSISTANT TOOLS**



**UNDERSIDE CAMERA  
WITH LCD MONITOR**



**AUTO-LOCATING  
TOOL HEAD**

**Ranger**  
PRODUCTS





# Wheel Service

Ranger's NextGen™ Tire Changers - Tire Shop Tested™

**NextGen™** SERIES

All NextGen models are loaded with design enhancements that make the technician's job easier. Sturdy frames, rigid 45mm hexagonal vertical shafts, and hardened-steel horizontal outrigger support arms eliminate flex during all tire service procedures reducing the chance of damage to expensive wheels. Bead seating and tire inflation is simple and effortless with Ranger's exclusive TurboBlast™ portable bead seating system. High-torque electric turntables, increased speed and reversible direction means quicker tire removal and installation. Industrial-grade pneumatic control valves feature die cast and machined bodies constructed from zinc and aluminum for increased service life and performance at the highest level possible within almost every imaginable working condition. Important wheel service accessories come standard like a large soap bucket with brush and a multi-piece plastic wheel protector kit that includes turntable jaw covers, bead-breaker blade boots and specialized mount / demount head covers to help protect delicate wheels.



**R745  
Swing Arm**

Internal Clamping - 12" - 21"  
External Clamping - 10" - 18"  
Maximum Tire Diameter - 36"



**R23LT  
Tilt-Back**

Internal Clamping - 11.5" - 24"  
External Clamping - 10" - 22"  
Maximum Tire Diameter - 41"



**R23AT  
Tilt-Back Power Assist**

Internal Clamping - 11.5" - 24"  
External Clamping - 10" - 22"  
Maximum Tire Diameter - 41"



**R980AT  
Power Assist  
Swing Arm**

**R980XR  
Swing Arm**

Internal Clamping - 13" - 25.5"  
External Clamping - 11.5" - 23.5"  
Maximum Tire Diameter - 50"



**R980NXT  
Swing Arm Power Assist**

Internal Clamping - 13" - 25.5"  
External Clamping - 11.5" - 23.5"  
Maximum Tire Diameter - 50"



**R26AT  
Tilt-Back Power Assist**

Internal Clamping - 14.5" - 28"  
External Clamping - 12.5" - 26"  
Maximum Tire Diameter - 47"



**R26DT  
Tilt-Back Dual Power Assist**

Internal Clamping - 14.5" - 28"  
External Clamping - 12.5" - 26"  
Maximum Tire Diameter - 47"



**R30XLT  
Swing Arm Power Assist**

Internal Clamping - 13" - 33"  
External Clamping - 10" - 28"  
Maximum Tire Diameter - 50"




**R26FLT  
Truck Tire Changer**

Drive System - Electric / Hydraulic  
Maximum Rim Diameter - 10" - 26"  
Maximum Tire Diameter - 63"

## ACCESSORIES:



Reduction / Extension Clamps



Motorcycle Wheel Clamp



RWL-150T Wheel Lift



Mounting Head Adapters



Wheel Protector Kit

## RX3040 Advanced Touchless Performance

Ranger RimGuard™ technology means expensive wheels are handled with greater care



# NextGen™ SERIES

See it on the BendPak / Ranger YouTube Page





# Wheel Service

## RWS-55TD FEATURES:

- Handles tires up to 68" in diameter
- Large water tank
- Foot operated wheel lift
- 500-lb. capacity
- Heavy-duty all steel construction and powder coated finish
- Includes built-in drain

## RV-80L / H FEATURES:


- Simple, one-man operation
- Heats tread, shoulder and sidewall
- Cures the patches and inner tire lining
- Rotating adjustable frame
- Adjustable height tower
- Contoured inner and outer curing heads
- Available in low and high voltage

## TS-150 FEATURES:

- Adjustable height tire spreader
- Air-powered
- Perfect for tire inspection and repair
- Heavy-duty rollers allow tires to rotate freely
- Heavy steel construction
- Wide-base design for stability
- Powder coat finish



## RL-8500 / RL-8500XLT (not pictured) Combination Brake Lathe Package

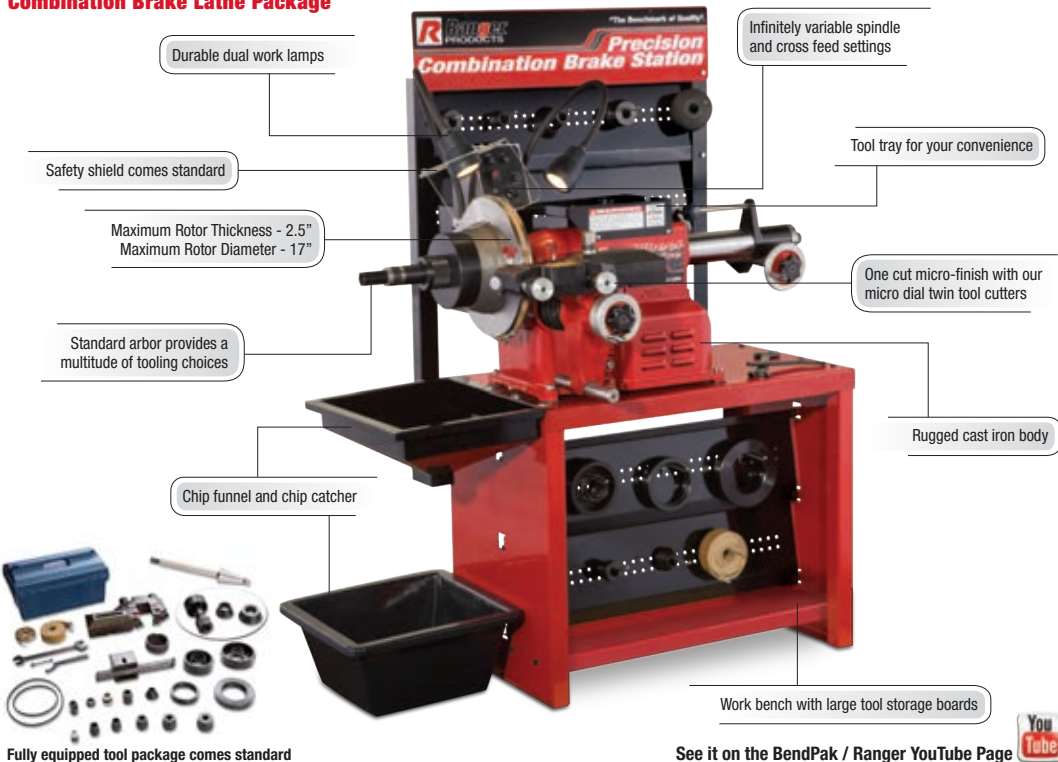



## DST-2420 FEATURES:

- Dynamic, Static, and Performance Alloy settings
- Automatic round-off with top-dead-center weight position indicator
- Hardened-steel 36-mm shaft
- Quick-release hub nut
- Multi-user save function

## DST46T FEATURES:

- Precision DataWand™ and inner data arm
- Low RPM balancing speed and rapid six-second cycle time
- Automatic braking
- LED inner wheel target light
- Manual or automatic start
- Self calibration function

## RB24T FEATURES:

- An ergonomic control board and easy-to-read LED display
- Highly precise 64-bit architecture
- Perfectly balanced vibration-free counter weighted flywheel belt drive
- Auto-stop function, electromagnetic pulse combined with pneumatic braking

### DST-2420 Wheel Balancer



RML-350 Wheel lift available

Max. Wheel Diameter - 10" - 30"  
Max. Tire Diameter - 47"  
Max. Tire Weight - 145 lbs.

### DST64T Wheel Balancer with DataWand™ Entry



Max. Wheel Diameter - 10" - 30"  
Max. Tire Diameter - 50"  
Max. Tire Weight - 150 lbs.

### RB24T Truck Wheel Balancer



Max. Wheel Diameter - 30"  
Max. Tire Diameter - 50"  
Max. Tire Weight - 400 lbs.

### CRT380R Wireless Wheel Aligner

Visual vehicle adjustment help



"Before" and "after" measurements can be printed

Superior screen graphics with vibrant animation

Technician has the option to customize units of measurement, accuracy, language, etc.

Self-centering wheel-clamp adapters

Customer information can be stored in the database, for quick reference of previous work orders

Cordless Bluetooth® sensors remove the hassle of connecting cables



# Jacks & Lifting

## INFORMATION:

Ranger's wide-array of multi-purpose floor jacks just keeps getting larger and more diverse. Our current line of floor jacks has maximum capacities ranging from 2,000 to 55,000 lbs. and come in a variety of styles like quick-pump and low-profile. No matter which one you choose, Ranger floor jacks offer incredible lifting power and top notch construction that you can count on to never let you down. Our impressive line of floor jacks is carefully designed to accommodate a wide spectrum of weight capacities and lifting applications, easily lifting just about anything that needs service.

**RFJ-214T**



Capacity - 4,500 lbs.  
Height - 5"- 18.25"  
Chassis Length - 26"

**RFJ-2TX**



Capacity - 4,000 lbs.  
Height - 3.5"- 31.5"  
Chassis Length - 37"

**RFJ-3T**



Capacity - 6,000 lbs.  
Height - 4.75"- 20.5"  
Chassis Length - 28"

**RFJ-3TP**



Capacity - 6,000 lbs.  
Height - 5.25"- 19.25"  
Chassis Length - 26"

**RFJ-3TQP**



Capacity - 6,000 lbs.  
Height - 5"- 19.75"  
Chassis Length - 25.5"

**RFJ-6HD**



Capacity - 6,000 lbs.  
Height - 3.625"- 21"  
Chassis Length - 27"

**RFJ-3000AL**



Capacity - 3,000 lbs.  
Height - 3.375"- 17.375"  
Chassis Length - 23.75"

**RFJ-3000LPF**



Capacity - 3,000 lbs.  
Height - 2.75"- 24"  
Chassis Length - 34"

**RFJ-4000AL**



Capacity - 4,000 lbs.  
Height - 3.375"- 17.375"  
Chassis Length - 23.75"

## GALLERY:



**RFJ-10TL**



Capacity - 20,000 lbs.  
Height - 7" - 23"  
Chassis Length - 61"

**RST-2TCB**  
**Floor Jack Crossbeam**



Capacity - 4,500 lbs.  
Saddles Adjustment - 23" - 32"  
Dimensions - 6" x 27" x 6"

**RBJ-25TL**



Capacity 1st Stage - 55,000 lbs.  
Capacity 2nd Stage - 20,000 lbs.  
Height - 7.125" - 14.75" / Chassis Length - 30"

**RTJ-660**



Capacity - 660 lbs.  
Height - 51" - 73"  
Base - 30" x 30"

**RTJ-1100**



Capacity - 1,100 lbs.  
Height - 45" - 72"  
Base - 24" x 24"

**RTJ-1**  
The original  
**TransJack**



Capacity 1st Stage - 2,000 lbs.  
Capacity 2nd Stage - 1,000 lbs.  
Height - 37" - 73" / Base - 39" x 39"

**RTJ-3000**



Capacity 1st Stage - 3,000 lbs.  
Capacity 2nd Stage - 2,000 lbs.  
Height - 37" - 79.5" / Base - 45" x 45"




**RFJ-3000LPF**

# Jacks & Lifting

## SERIES FEATURES:

- Welded steel construction for maximum durability
- Safety ratchet design assures stands remain locked under load
- Perfect for holding drive-train or exhaust components in position
- Sold in pairs
- Quick adjust spin handle with thrust bearing
- Wide base provides maximum stability
- Thick, rubber adjustable pad for maximum support
- Convenient handle and column release
- Hardened ACME screw for easy adjustment
- Tripod design evenly distributes weight
- Pneumatic operated wheel lift
- One-handed, lever controlled
- Heavy-duty steel casters
- Bearing mounted slider

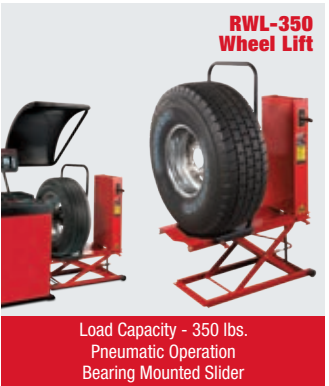



# Motorcycle Lifts

## SERIES FEATURES:

- Constructed out of 12-gauge steel
- Pneumatic lifting cylinder
- Durable powder-coat finish
- Adjustable front wheel vise
- Drop-away rear wheel deck
- Easy ramp(s) removal
- Front and side extensions standard
- Built-in retractable swivel casters
- Full travel automatic safety locks
- Single hydraulic lifting cylinder
- Side decks can be easily removed
- Diamond-plate approach ramps
- Air or hydraulic pump operation
- Multiple locking positions



**RML-600XL**

Lifting Capacity - 1,000 lbs.  
Height - 7" - 31.5" / Table Width - 24" - 44"  
Table Length - 79" - 98"



**RML-1500XL  
Super Stretch**


Lifting Capacity - 1,500 lbs.  
Height - 7" - 45" / Table Width - 30" - 53"  
Table Length - 89" - 102"



**RML-1100**

Lifting Capacity - 1,100 lbs.  
Height - 3.5" - 16"  
Top Dimensions - 6" - 17.75"

**RML-1500XL  
Super Stretch**

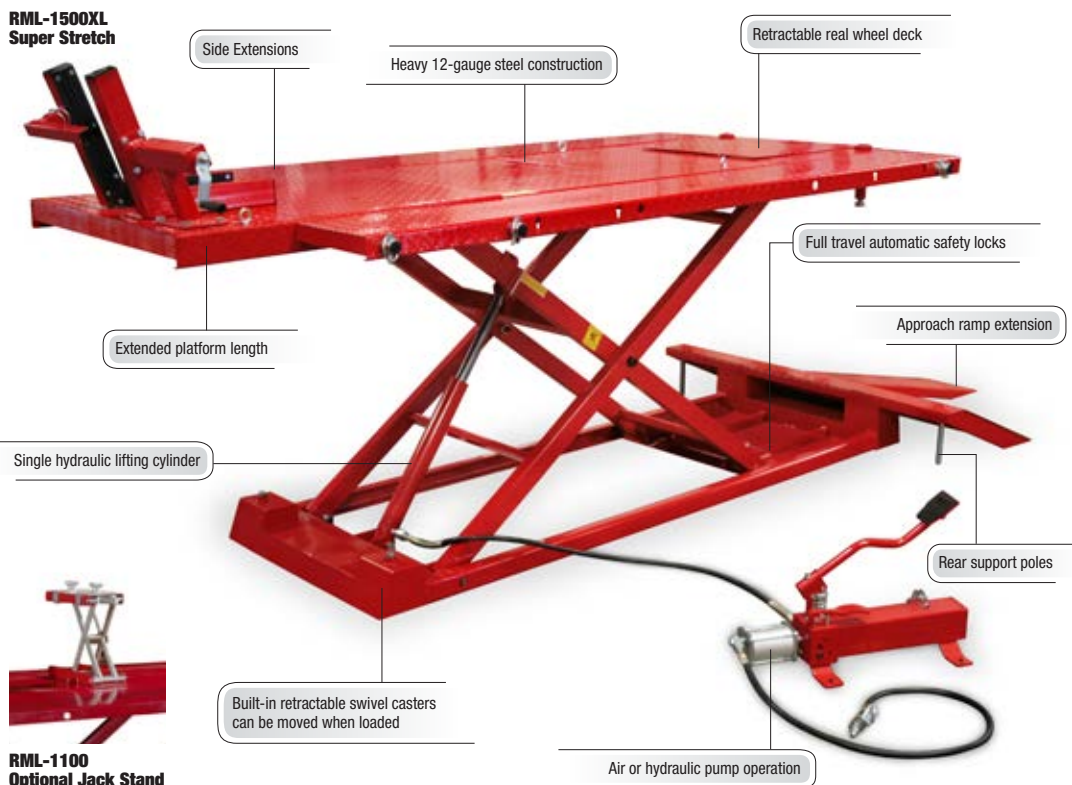

**RML-1100  
Optional Jack Stand**

# Tool Storage & Benches

## INFORMATION:

Ranger Toolboxes and tool chests are gaining popularity by the day in automotive shops and private garages. That's because our tool storage solutions are built to the strictest specifications, featuring high-grade 16 and 18-gauge steel construction, durable internal cages, high-quality welds, all the best drawer hardware and a masterful cherry-red powder coat finish that looks better than any stock paint job on the market—and it'll last forever to boot.

Without question, for your projects to get completed on time and to your satisfaction, you require a dedicated work area. So Ranger developed a line of large, heavy-gauge steel workbenches, specifically designed to handle the physical rigors of being in a busy garage or shop. We currently offer three sizes and styles to suit your needs and space restraints.



**RTB-7DC**

Number of Drawers - 7  
Unit Dimensions - 29" x 40" x 18"  
Mates with RTB-2D / RTB-9D / RTB-10D



**RTB-13DC**

Number of Drawers - 13  
Unit Dimensions - 47.5" x 40" x 19"  
Mates with RTB-8D / RTB-8DT



**RTB-2D**

Number of Drawers - 2  
Unit Dimensions - 26.25" x 10.5" x 12.25"  
Mates with RTB-9D / RTB-7DC / RTB-10D



**RTB-8D**

Number of Drawers - 8  
Unit Dimensions - 41.5" x 19" x 18.5"  
Mates with RTB-13DC




**RTB-8DT**

Number of Drawers - 8  
Unit Dimensions - 41.5" x 19" x 18.5"  
Mates with RTB-13DC



**RTB-9D**

Number of Drawers - 9  
Unit Dimensions - 26" x 17" x 12"  
Mates with RTB-2D / RTB-7DC



**RTB-10D**

Number of Drawers - 10  
Unit Dimensions - 26" x 19" x 16"  
Mates with RTB-2D / RTB-7DC



## RWB-2D FEATURES:

- Electrostatic triple-baked protective powder coat
- Rolled edges for added strength and rigidity
- Full-extension ball bearing drawer slides
- Tumbler key-lock pivot drawer latching system

## RWB-2S FEATURES:

- Glossy red finish
- Electrostatic oven-baked powder coat
- Rolled edges for added strength and rigidity
- 5/32" HD rolled edge steel table top
- 3/32" HD rolled edge steel shelves
- 12-gauge construction

## RWB-1TD FEATURES:

- Lockable heavy-duty drawer
- 500-lb. working capacity
- Heavy-duty 4" casters
- Adjustable working height
- Removable polyethylene fluid drain
- 14-gauge table top
- 3/4" liquid containing rim

**RWB-2D**



Height - 34.5"  
Width - 59"  
Depth - 25.25"

**RWB-2S**



Height - 34.5"  
Width - 79"  
Depth - 25.25"

**RWB-1TD**



Height - 40"  
Width - 48"  
Depth - 32"

## RTB-8D / RTB-13DC Shown as combo



Protective rubber mat

Rolled edges for added strength and rigidity

Chrome side handles

Heavy-gauge steel body

Full-extension ball bearing drawer slides

Brushed aluminum drawer handles

Electrostatic oven baked powder coat finish

2 heavy-duty fixed urethane casters and 2 heavy-duty swivel urethane casters with brake

# Shop Equipment

## INFORMATION:

Let Ranger Products lighten the load with our considerable line of high-quality rolling equipment. All Ranger Carts and Dollies are made from high-gauge steel and employ only the best casters for easy maneuvering. Our service carts, chassis-mount vehicle dollies, low-profile automobile carts and rolling adjustable work tables come fully equipped to make your day in the garage infinitely easier. Don't lift or carry—roll with Ranger!

Ranger's industrial shop presses offer you the versatility of professional-grade hydraulic force, whether you're at the shop or in your own garage. Among other operations, all Ranger Hydraulic Presses are ideal for the removal and installation of gears, bushings and bearings—so you can bend, straighten, flatten, crush, press, shape, push, pull, lift and spread like you were born doing it.

**RCD-1TD  
Auto Carts**



Capacity - 1,000 lbs. (Each)  
Dimensions - 15.5" x 23.5"  
3.5" Cast Iron Ball Bearing Casters

**RCD-65**



Load Capacity - 55 lbs.  
Shipping Weight - 38 lbs.  
Shipping Dimensions - 30" x 26" x 6"

**RCD-3TR**



Tray Dimensions - 16" x 32"  
Shipping Weight - 40 lbs.  
Shipping Dimensions - 31" x 17" x 6"

**RCD-1V  
Vehicle Dolly**



Lifting Capacity - 1,500 lbs.  
Overall Height - 12"  
Caster Size - 4.5"

**RP-10TP  
Porta Power**



Capacity - 10 Tons / 20,000 lbs.  
Stroke Ram - 6"  
Hose Length - 6'

**RP-20T**



Capacity - 40,000 lbs.  
Cylinder Stroke - 8"  
Width - 23" / Height - 59"



**RCD-1500  
GoCart™  
Vehicle Dolly**



Load Rating Each - 1,500 lbs.  
Wheel Size Capacity - 8" - 24"  
Tire Diameter Capacity - 15" - 28"



**GoCart™  
Storage Rack**



Load Rating - 200 lbs.  
Dimensions - 19" x 31" x 6"  
Holds up to 4 GoCart™ Dollies

**RP-20HD**



Capacity - 40,000 lbs.  
Cylinder Stroke - 5.5"  
Width - 37" / Height - 60.25"



## SERIES FEATURES:

- Wall, floor, or ceiling mount
- Use for air or water
- Powder coated for corrosion free performance
- Solid brass swivel fitting
- Guide arms adjusts to 9 positions
- 4 direction, non-snag rollers
- Multi-position release ratchet
- Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended
- Reinforced mounting base



**RH-33SL**



Air Pressure - 300 psi  
Hose Length - 33'  
Fittings - 3/8"

**RH-50SL**




Air Pressure - 300 psi  
Hose Length - 50'  
Fittings - 3/8"

**RH-50PL**




Air Pressure - 300 psi  
Hose Length - 50'  
Fittings - 3/8"

**RH-50PM**



Air Pressure - 2,250 psi  
Hose Length - 50'  
Fittings - 3/8"

**RH-50PL**

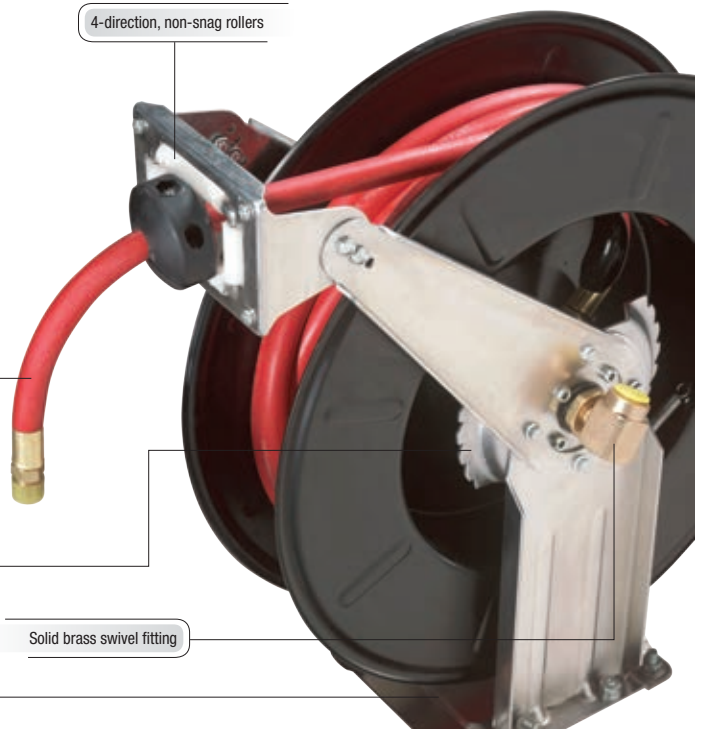

4-direction, non-snag rollers

Use for air or water

Anti-lock out ratchet mechanism prevents reel from locking up when hose is fully extended

Solid brass swivel fitting

Wall, floor, or ceiling mount with a 7" x 8" reinforced mounting base

# Shop Equipment

## SERIES FEATURES:

### Oil Drains

- Lightweight for easy portability
- Safe and easy to use
- Non-corrosive telescoping tube
- Heavy-duty stainless steel clamp
- Built-in hand grips
- Durable steel construction

- Tough construction will resist dents, rust, and corrosion
- Rugged funnel with built-in contamination screen

### Oil Filter Crushers

- Reduces cans up to 20%
- Reduces filters up to 25%

- Crushes cans in only 20 seconds
- 100% air operated
- Fulfills EPA and other mandated environmental standards
- Removes up to 95% of the oil
- Compact floor or bench-mount design
- All-steel industrial construction

**RD-8G**



Capacity - 8 gal.  
Height - 47" - 63"  
Funnel Diameter - 17"

**RD-18G**



Capacity - 18 gal.  
Height - 48" - 72"  
Evacuation Pump

**RD-15**



Capacity - 15 gal.  
Height - 8.5"  
Shipping Weight - 52 lbs.

**RD-20SE  
Air Evac  
Oil Drain**



Capacity - 20 gal.  
Height - 52" - 83"  
Funnel Diameter - 16"

**RP-20FCS  
Stand**



Capacity - 230 lbs.  
Unit Weight - 72 lbs.  
Dimensions - 27.75" x 42" x 17.75"

**RP-6KC  
Paint Can  
Crusher**



Capacity - 3 Ton / Cycle Time - 15 - 20 sec.  
Air Requirements - 140 - 160 psi  
Dimensions - 15" x 37" x 14"

**RP-20FC  
Oil Filter  
Crusher**



Capacity - 10 Ton / Cycle Time - 15 - 20 sec.  
Air Requirements - 125 - 175 psi  
Dimensions - 17" x 29.5" x 17"



## RS-500 / RS-750 FEATURES:

- Heavy-duty steel construction
- Removable tank screen
- Stainless oil skimmer
- Removable parts tree
- Powder coat finish
- Brass nozzles
- Full opening octagonal door
- Large drain pipe
- Heavy-duty rubber casters
- Friction-drive turntable system
- Gasket-free door
- Small parts basket
- Stainless steel handles
- Free bucket of soap included

## SOAP FEATURES:

- Non-foaming soap
- Low pH
- Mild alkali
- Water soluble
- Specially formulated
- Removes grease, oil, stains, carbon, protein, and some paints



**RS-500  
Spray  
Wash  
Cabinet**

Load Capacity - 500 lbs.  
Tank Capacity - 50 gal.  
Interior Dimensions - 43" x 32"



**RS-750  
Spray  
Wash  
Cabinet  
(Truck)**

Load Capacity - 1,000 lbs.  
Tank Capacity - 53 gal.  
Interior Dimensions - 32" x 54"



**SOAP 20 LBS. / 50 LBS.**

Low pH  
Water soluble  
Non foaming soap

### RS-750



# Shop Equipment

## SERIES FEATURES:

### Small Material Bender

- Heavy steel construction
- Perfect for bending solid, round and flat steel bars or tubing
- Must have for muffler shops
- Bends virtually all small tubing and square stock sizes

### Rolling Creeper/Work Seat

- Padded center cushion and headrest
- Swivel casters for easy maneuverability
- Relieves sore back muscles
- Work more efficiently
- Sturdy steel tubing construction
- Low profile design

### Tire Changers

- Rubber grip handles
- Perfect for home or shop use
- Portable and easy-to-use
- Heavy steel construction
- Self-leveling stand
- Efficient operation at a fraction of cost

#### RB-1ST Small Material Bender



Maximum Bending Depth - 90°  
Tubing Sizes - 1/4" - 3/8" - 1/2" - 5/8"  
Shipping Weight - 32 lbs.

#### RST-1C Creeper



Weight Capacity - 350 lbs.  
Steel Tubing - 3/4"  
Swivel Casters - 2.5"

#### RST-1WS Rolling Work Seat



Steel Tubing - 1"  
Swivel Casters - 2.5"  
Relieves sore back muscles

#### RWS-1B Bubble Balancer



Hub Hole Diameter - 1.5" - 4.5"  
Calibrated at - 90° - 180° - 270° - 360°  
Width - 12" / Height - 23"

#### RWS-2TC Mini Tire Changer



Tire Capacity - 4" - 12"  
Shipping Weight - 14 lbs.  
Shipping Dimensions - 22" x 7" x 6"

#### RWS-3TC



Heavy steel construction

Performs both mounting and bead breaking operations

Portable and easy to use

Perfect for home or shop use

#### RWS-3TC Manual Tire Changer



Tire Capacity - 8" - 7.5" x 16"  
Wheel Plate Diameter - 7.5"  
Base Dimensions - 15" x 18"



## RST-500ES / RST-500ESD

- Adjusts to fit all vehicles
- Rubber foot pads to hold load securely
- Straddles inner fender wells
- Precisely positions engine for easy gear box and transmission removal
- Perfect for 4 and 6 cylinder engines
- 1,100 lb. & 1,500 lb. capacity

### RST-500ES Engine Support



Holding Capacity - 1,500 lbs.  
Screw Travel - 13"  
Adjustable Width - 40" - 63"

### RST-500ESD Engine Support



Holding Capacity - 1,100 lbs.  
Screw Travel - 18.75"  
Adjustable Width - 26.5" - 49.5"

## RES-1TF FEATURES:

- Folds upright to conserve space
- Heavy steel construction
- Long rubber-grip handle
- Head swivels 360° for easy positioning
- Heavy-duty swivel casters
- Slotted adjustable saddle permits
- Neck is reinforced for extra strength

### RES-1TF Engine Stand



Holding Capacity - 2,000 lbs.  
Front Width - 31" / Rear Width - 27.5"  
Height - 37.5" / Length - 41"

## RSC-2TF FEATURES:

- Designed for shops with limited space
- Folds for easy storage
- Heavy-duty steel casters
- Neck is reinforced for extra strength
- Wide base for maximum stability
- Telescoping boom provides 4 positions
- Heavy steel construction

### RSC-2TF Folding Shop Crane




Boom Length - 40" - 63"  
Boom Capacity - 1,100 - 4,400 lbs.  
Boom Height - 80" - 93"

### RES-1TF



### RST-500ESD

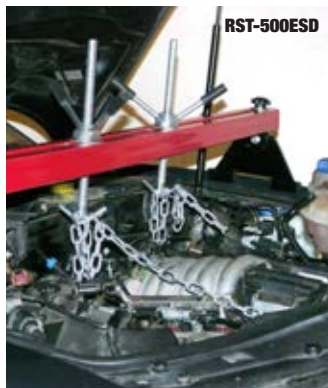

# Manufacturing Superiority

BendPak recognizes the manufacturing process as our moment of maximum influence. When we ship a piece of equipment, we need to know that the product that left our manufacturing complex was the best it could be. That's why we demand nothing short of the very finest in facilities and machinery. Our primary factory houses development and manufacturing for medium and heavy-duty lifting products and wheel service models. At just over 300,000 square foot it's a facility designed for maximum efficiency and safety, where we employ the best steel fabrication techniques in the world.

## Main Production Facility



## MEDIUM AND HEAVY-DUTY PRODUCTS

BendPak's second mega-sized manufacturing is used primarily for manufacturing light and medium duty lift products, select parking systems, and select vehicle repair tools and equipment. The multiplex factory houses state-of-the-art equipment including numerically-controlled turning and milling equipment, automated welding systems and full-capability services like comprehensive metallurgy testing, heat treatment, automated powder coating, and other specialty operations. The facility also houses assembly and packaging operation centers and product development testing labs for BendPak's growing customer base around the globe.



## LIGHT AND MEDIUM-DUTY LIFT PRODUCTS

Our multi-department manufacturing complexes have allowed us to expand machinery and employees and triple our daily production capacity. All BendPak employees are Q.C. trained and follow rigid ISO-9001 guidelines. Every day, more than 700 employees around the world dedicate themselves to putting our core values into action. Safety is first—it's our company's top priority, followed closely by environmental responsibility, cost-efficiency, quality, customer service and accountability for all departments. These principles guide our highly skilled workforce towards BendPak's unified vision.

Across the globe, BendPak's facilities encompass over 600,000 square feet in total and consist of vertically integrated manufacturing, operations and logistics facilities. Each location follows strict guidelines as outlined by ISO-9000, further supporting our position as a premier global manufacturer. At BendPak, we ensure that our offshore manufacturing is no different in approach, standards, quality, inspection or packaging from our domestic production. These facilities are audited year round and undergo systematic evaluation of documented quality programs such as TUV, ANSI/ALI ALCTV, CSA, UL and AS/NZS 1418.9. The programs themselves are audited quarterly, regardless of the facility location, to ensure continued compliance with all applicable standards.



BendPak, Ranger Products and BendPak / Ranger related marks are trademarks and/or registered trademarks of BendPak Inc.



Inquire about these certification listings.



1645 Lemonwood Drive • Santa Paula, CA USA 93060

Tel: 1-805-933-9970 • Fax: 1-805-933-9160 • [www.bendpak.com](http://www.bendpak.com)