



# Pneumatic Products Airline Accessories

Catalog MRO-7

aerospace  
 climate control  
 electromechanical  
 filtration  
 fluid & gas handling  
 hydraulics  
**pneumatics**  
 process control  
 sealing & shielding



ENGINEERING YOUR SUCCESS.

**Warning, Offer of Sale**

---

 **WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application including consequences of any failure, and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

**Offer of Sale**

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled "Offer of Sale".

**Table of Contents**

---

<b>Control Panel Products</b>	<b>A</b> Control Panel Products
<b>LV / EZ Lockout Valves</b>	<b>B</b> LV / EZ Lockout Valves
<b>Integrated Fittings</b>	<b>C</b> Integrated Fittings
<b>Accessories</b>	<b>D</b> Accessories
<b>Ball Valves / Plug Valves</b>	<b>E</b> Ball Valves / Plug Valves
<b>Quick Couplings</b>	<b>F</b> Quick Couplings
<b>Hose &amp; Fittings</b>	<b>G</b> Hose & Fittings
<b>Tubing &amp; Fittings</b>	<b>H</b> Tubing & Fittings
<b>Safety Guide, Offer of Sale</b>	<b>J</b> Safety Guide, Offer of Sale

---

**Notes**

---



# Control Panel Products

## Section A



Basic Features .....	A2	Dimensions & Assembly.....	A7
Push Button Bodies.....	A3	Legend Plates, Specifications .....	A8
Push Buttons .....	A4	Mounting.....	A9
Selector Switches.....	A5	Visual Indicators 22mm (7/8") .....	A10
Valve Bodies & Accessories.....	A6	Two-Hand Controls.....	A11-A12

A
Basic Features
Push Buttons
Selector Switches
Valve Bodies & Accessories
Visual Indicators
Foot Pedal Operated Switches
Two Hand Controls

**Basic Features**

**Pneumatic Push Button & Visual Indicators**

**A**

Basic Features

Push Buttons

Selector Switches


Valve Bodies & Accessories

Visual Indicators

Foot Pedal Operated Switches


Two Hand Controls

HUMAN-MACHINE DIALOG requires devices such as push buttons and selector switches to provide command inputs. A wide variety of these devices is available to meet most application needs. Both pneumatic and electrical switch bodies are available to match system technology. All of these devices use the 22 mm (7/8") mounting standard.

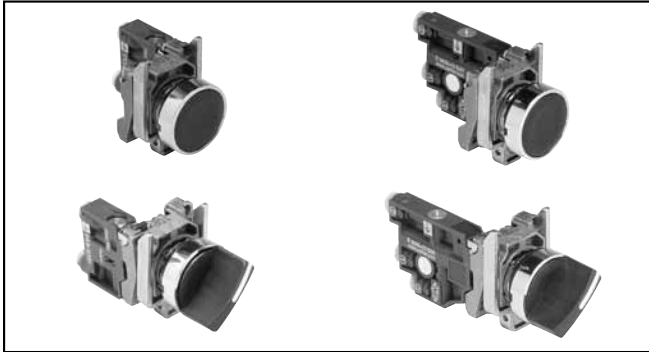

**PNEUMATIC VISUAL INDICATORS**

An indicator ball is rotated by a pneumatic input, changing the visible color. The ball sits behind a clear plastic window, providing a wide field of view. The visual indicators are available in five brightly colored Day-Glow paints for increased visibility. Like push buttons and selector switches, visual indicators use the 22mm (7/8") mounting standard.

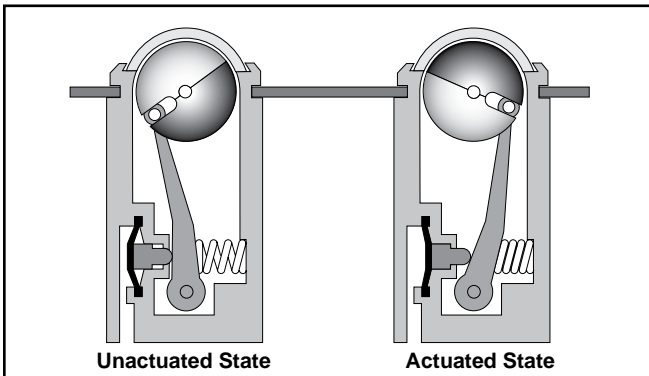

**MODULAR PNEUMATIC / ELECTRIC PUSH BUTTONS**

As with electrical contact switches, pneumatic valve modules can be mounted on a number of different operating heads.

- Pneumatic normally non passing (NNP) is equivalent to electrical normally open (N.O.).
- Pneumatic normally passing (NP) is equivalent to electrical normally closed (N.C.).

Note: Electrical switches can be stacked, but the rear connection on pneumatic switches prevents stacking. Therefore, when mixing electrical and pneumatic switch bodies on the same operator, the pneumatic switch must be mounted last.



**Push Buttons**


Spring Return or Latching  
Mushroom Headed Push Buttons

Standard Push Button

**Visual indicators**

**Selector Switches**

2 or 3 Positions,  
Fixed or  
Return To Center

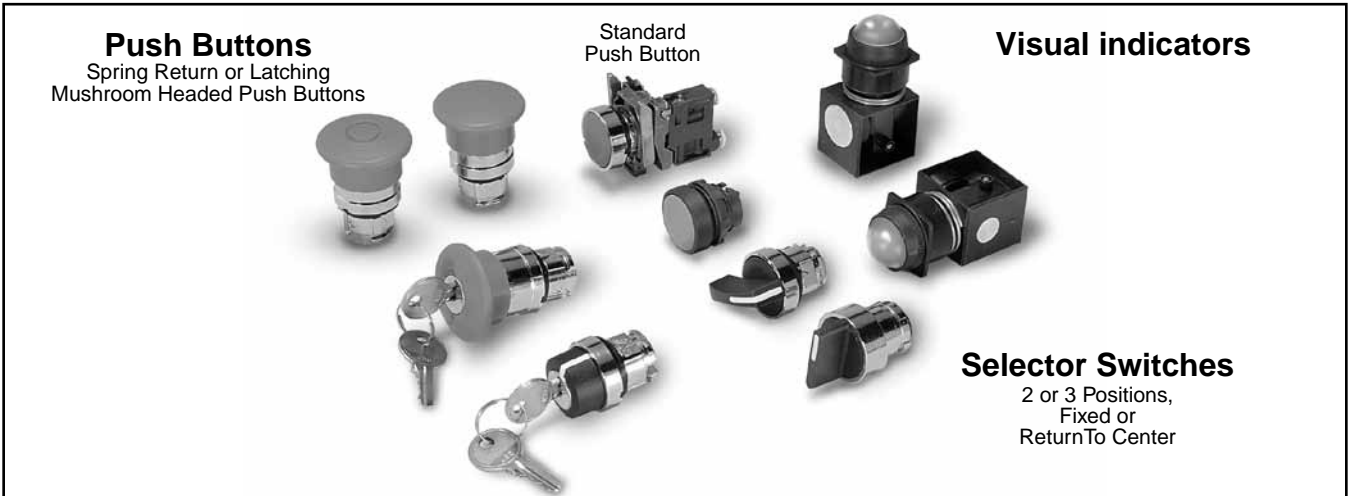

**With 3/2 Valve Bodies 5/32" Instant Straight Connections**

**Flush Push Buttons**



PXBB3111BA2



PXBB4131BA2

Part Number	Color	Function	Type of Switching*
PXBB3111BA2	Black	Spring Return	NNP
PXBB3111BA3	Green		
PXBB3111BA4	Red		
PXBB3251BA2	Black	Spring Return	NNP+NP
PXBB4131BA2	Black	Spring Return	Single Universal 3-Way
PXBB4131BA3	Green		
PXBB4131BA4	Red		
PXBB4231BA2	Black	Spring Return	Dual Universal 3-Way

\* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

Note: Mount up to three valves on mounting ring.

**Mushroom Head Push Buttons (40mm Diameter)**



PXBB3111BC2



PXBB4131BC2

Part Number	Color	Function	Type of Switching*
PXBB3111BC2	Black	Spring Return	NNP
PXBB3111BT4	Red	Push-Pul	
PXBB3121BT4	Red	Push-Pull	NP
PXBB4131BC2	Black	Spring Return	Single Universal 3-Way
PXBB4131BT4	Red	Push-Pull	


\* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

Note: Mount up to three valves on mounting ring.

**Selector Switches**



PXBB3111BD2



PXBB4131BD2

Part Number	Color	Function	Type of Switching*
PXBB3111BD2	Black	2 Maintained	NNP
PXBB3211BD2	Black	Positions with	NNP+NNP
PXBB3251BD2	Black	Std. Handle	NNP+NP
PXBB3211BD3	Black	3 Maintained Positions with Std. Handle	NNP+NNP
PXBB3251BD3	Black		NNP+NP
PXBB3211BJ5	Black	3 Positions, Spring Return to Center with Long Handle	NNP+NNP
PXBB4131BD2	Black	2 Maintained Positions with Std. Handle	Single Universal 3-Way
PXBB4231BD2	Black	2 Maintained Positions with Std. Handle	Dual Universal 3-Way
PXBB4231BD3	Black	3 Maintained Positions with Std. Handle	Dual Universal 3-Way
PXBB4231BJ5	Black	3 Maintained Positions with Long Handle	Dual Universal 3-Way

\* Type of switching: Universal 3-way: valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.

**BOLD ITEMS ARE MOST POPULAR.**

**A**

Basic Features

Push Buttons

Selector Switches

Valve Bodies & Accessories

Visual Indicators

Foot Pedal Operated Switches

Two Hand Controls

**For Use With PXBB Valve Bodies and ZBE Electrical Switch Bodies**

**A**

Basic Features

Push Buttons

Selector Switches


Valve Bodies & Accessories

Visual Indicators


Foot Pedal Operated Switches

Two Hand Controls

**Push Buttons**

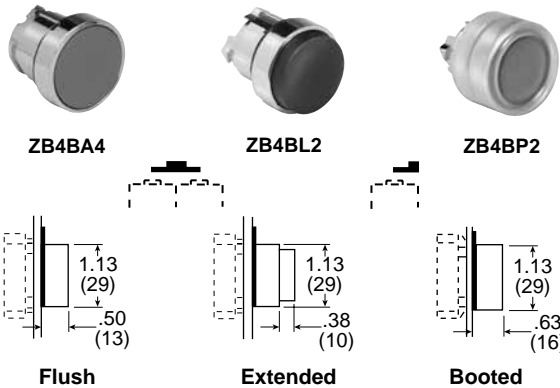

**Mushroom Head Push Buttons**

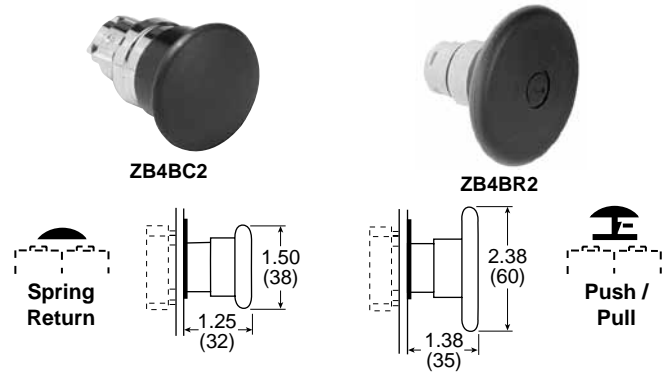

Plastic Head ZB5**		Metal Head ZB4*		
Part Number	Part Number	Color	Function	Description
ZB5AA2	<b>ZB4BA2</b>	Black	Spring Return	Flush
ZB5AA3	<b>ZB4BA3</b>	Green		
ZB5AA4	<b>ZB4BA4</b>	Red		
—	ZB4BA5	Yellow		
—	ZB4BA6	Blue		
ZB5AL2	<b>ZB4BL2</b>	Black	Spring Return	Extended
ZB5AL3	<b>ZB4BL3</b>	Green		
ZB5AL4	<b>ZB4BL4</b>	Red		
—	ZB4BL5	Yellow		
—	ZB4BP2	Black	Spring Return	Booted
—	ZB4BP3	Green		
—	ZB4BP4	Red		

Part Number*	Color	Function	Description
<b>ZB4BC2</b>	Black	Spring Return	Ø 40mm Head
<b>ZB4BC3</b>	Green		
<b>ZB4BC4</b>	Red		
<b>ZB4BT2</b>	Black	Latching Push-Pull	
<b>ZB4BT3</b>	Green		
<b>ZB4BT4</b>	Red		
<b>ZB4BR2</b>	Black	Spring Return	Ø 60mm Head
ZB4BR3	Green		
ZB4BR4	Red		

\* ZB4\*\*\* Model Numbers are Metal Head Operators

\* ZB4\*\*\* Model Numbers are Metal Head Operators  
 \*\* ZB5\*\*\* Model Numbers are Plastic Head Operators

**Push / Push Buttons**



ZB4BH02

Part Number*	Color	Function	Description
ZB4BH02	Black	Detent 2-Position	Flush
ZB4BH03	Green		
ZB4BH04	Red		

\* ZB4\*\*\*\* Model Numbers are Metal Head Operators

**Mounting Accessories**



ZB5AZ905

Part Number	Color	Description
ZB5AZ905	—	Plastic Head (ZB5) Mounting Nut Tightening Tool
ZBZ1602	Black Plastic	Guard for 40mm


**BOLD ITEMS ARE MOST POPULAR.**

## For Use With PXBB Variable Composition Switch Bodies

### Selector Switches




ZB4BD3



Standard Selector



ZB4BJ3





Knob Lever

### Key Operated Selectors



ZB4BG2



Standard Black Handle		
Part Number*	Description	Function
ZB4BD2	Maintained	2-Positions
ZB4BD4	Spring Return from Right to Left	
ZB4BD3	Maintained	3-Positions
ZB4BD5	Spring Return to Center from Left and Right	
ZB4BD7	Maintained Right Spring Return from Left to Center	3-Positions
ZB4BD8	Maintained Left Spring Return from Right to Center	3-Positions
Long Black Handle		
ZB4BJ2	Maintained	2-Positions
ZB4BJ4	Spring Return from Right to Left	
ZB4BJ3	Maintained	3-Positions
ZB4BJ5	Spring Return to Center from Left and Right	

\* ZB4\*\*\* Model Numbers are Metal Head Operators



Key Operated		
Part Number*	Key Withdrawal	Function
ZB4BG2	Left	2 Maintained Positions
ZB4BG4	Left and Right	
ZB4BG3	Center	3 Maintained Positions
ZB4BG5	Left and Right	
ZB4BG7	Center	3-Positions 2 Spring Return to Center

\* ZB4\*\*\* Model Numbers are Metal Head Operators

### Mushroom Head Push Buttons with Key Select



ZB4BS24




Part Number*	Color	Function	Description
ZB4BS54	Red	Latching Turn to Release	Ø 40mm Head
ZB4BS14	Red	Key Latching	
ZB4BS64	Red	Latching Turn to Release	Ø 60mm Head
ZB4BS24	Red	Key Latching	

\* ZB4\*\*\*\* Model Numbers are Metal Head Operators


**BOLD ITEMS ARE MOST POPULAR.**

**For Use With 22mm (7/8") Metal Operating Heads 5/32" Instant Connections**

**3/2 Valve Bodies with Mounting Ring**



PXBB3111B



PXBB4131B

Part Number	Connections	Function	Type of Switching*
<b>PXBB3111B</b>	5/32" Instant	3/2	NNP
<b>PXBB3121B</b>	5/32" Instant	3/2	NP
<b>PXBB4131B</b>	5/32" Instant	3/2	Universal 3-Way

Note: • Mount up to 3 valves on mounting ring for push buttons.  
 • Mount up to 2 valves on mounting ring for selector switches,  
 Valves **cannot** be mounted in center position.

**Specifications**

Air Quality –  
 Standard Shop Air, Lubricated or Dry..... 40 µm Filtration

Flow –  
 PXBB3•..... Cv=.08  
 PXBB4•..... Cv=.18

Materials –  
 Body ..... Polyamide  
 Operating Head ..... Zinc Alloy & Plastic

Operating Positions ..... All Positions

Operating Pressure –  
 PXBB3•..... 15 to 115 PSIG (1 to 9 bar)  
 PXBB4•..... 15 to 145 PSIG (1 to 10 bar)

Ports .....5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube

Temperature –  
 Operating.....5°F to 140°F (-15°C to + 60°C)

**Additional Valve Bodies**



PXBB3911



PXBB4932



PXBB4931

Part Number	Connections	Function	Type of Switching*
<b>PXBB3911</b>	5/32" Instant Straight	3/2	NNP
<b>PXBB3912</b>	5/32" Instant Swivel		
<b>PXBB3921</b>	5/32" Instant Straigh	3/2	NP
<b>PXBB3922</b>	5/32" Instant Swivel		
<b>PXBB4931</b>	5/32" Instant Straight	3/2	Universal 3-Way
<b>PXBB4932</b>	5/32" Instant Swivel		

**BOLD ITEMS ARE MOST POPULAR.**

**A**

Basic Features

Push Buttons

Selector Switches

Valve Bodies & Accessories

Visual Indicators




Foot Pedal Operated Switches

Two Hand Controls





**Dimensions & Assembly**

**PXB-B3 Dimensions**

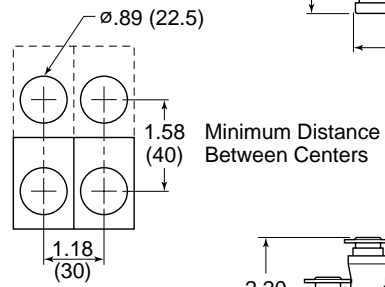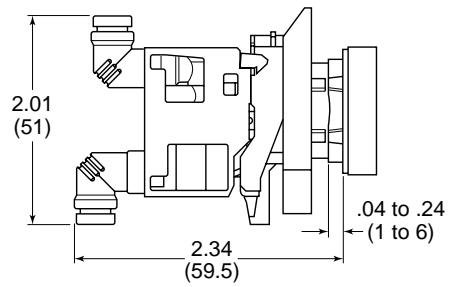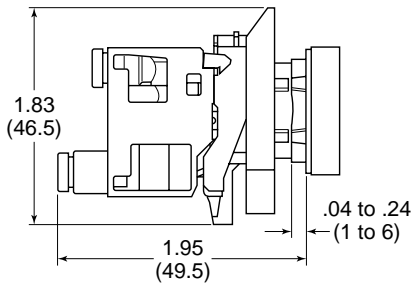

**PXB-B4 Dimensions**

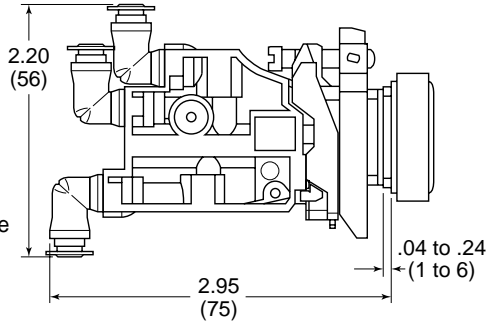
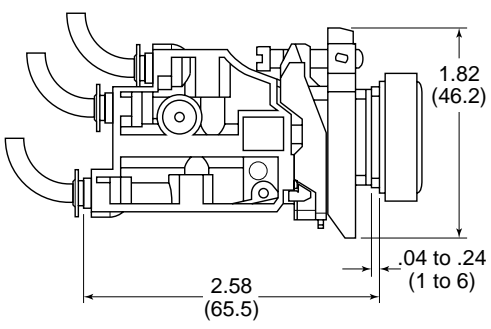


**Tube Bending Radius For PXBB3 and PXBB4**



- 4 mm O.D. x 2 mm I.D. Tube = Minimum 0.39 (10) Radius
- 4 mm O.D. x 2.7 mm I.D. Tube = Minimum 0.59 (15) Radius

**Assembly**

**Assembling PXB Valves On Mounting Block**



**Assembling PXB Valves On the Back of the Electrical Contact**

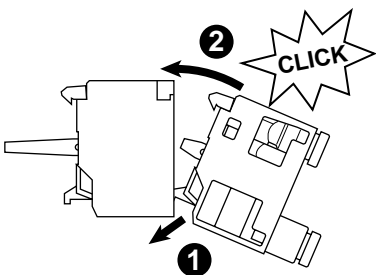


<b>A</b>
Basic Features
Push Buttons
Selector Switches
Valve Bodies & Accessories
Visual Indicators
Foot Pedal Operated Switches
Two Hand Controls

<b>A</b>
Basic Features
Push Buttons
Selector Switches
Valve Bodies & Accessories
Visual Indicators
Foot Pedal Operated Switches
Two Hand Controls

**For Push Buttons and Visual Indicators**

**Legend Plates for PXBB Devices (22mm)**



ZBY\*\*\*\*

Part Number	Description
<b>Without Text For Customer Engraving</b>	
ZBY2101	Black / Red Background (White Letters)
ZBY4101	Yellow / White Background (Black Letters)
<b>With Text For Push Buttons</b>	
ZBY2303	Start
ZBY2304	Stop
ZBY2305	Forward
ZBY2306	Reverse
ZBY2307	Up
ZBY2308	Down
ZBY2309	Right
ZBY2310	Left
ZBY2311	On
ZBY2312	Off
ZBY2313	Open
ZBY2314	Close
ZBY2321	Inch
ZBY2323	Reset
ZBY2326	Power On
ZBY2327	Slow
ZBY2328	Fast
ZBY2330	Emergency Stop
ZBY2334	Run
<b>With Text For 2-Position Selectors</b>	
ZBY2367	Off      On
<b>With Text For 3-Position Selectors</b>	
ZBY2387	Hand      Off      Auto

**Blank Legend Plates for Inscription**

<b>For PXBB Devices (2 lines of 11 characters maximum)</b> Please indicate the required text when ordering. (Allow 3 weeks for delivery)	
Part Number	Description
ZBY2002	Black Background / White Letters

**For 22mm Visual Indicators Only**

2 lines of 11 characters maximum Please indicate the required text when ordering. (Allow 3 weeks for delivery)	
Part Number	Description
ZB2BY2002	Black Background / White Letters

**Accessories**



ZBE101

<b>Electrical Switch Bodies</b>	
When combined with pneumatic valves, these contact blocks allow different forms of power to be provided from a single push button. Can be mounted with both types of valves PXBB3 / PXBB4.	
<b>Electrical Specification: 240V, 10Amp</b>	
Part Number	Type of Contact
ZBE101	Normally Open (NO)
ZBE102	Normally Closed (NC)

Note: Plastic Mounting Ring ZB5AZ009 to be used with ZB5 Plastic Operating Heads.  
 Metal Mounting Ring ZB4BZ009 to be used with ZB4 Metal Operating Heads.



Metal: ZB4BZ009



Plastic: ZB5AZ009

<b>Mounting Ring for Valve Bodies, Switch Bodies and Operating Heads</b>	
To make up a complete push button with one to three switching elements with 5/32" instant connections, use this mounting block and select the operating heads and bodies in this Section.	
Part Number	Description
ZB4BZ009	Metal Mounting Ring
ZB5AZ009	Plastic Mounting Ring
To make up a complete selector switch with one or two switching elements with 5/32" instant connections, use this mounting block and select the operating heads and bodies in this Section.	
Part Number	Description
ZB4BZ009	Metal Mounting Ring
ZB5AZ009	Plastic Mounting Ring

**Note:** To release push button from mounting ring, pull lever on top of mounting ring up and remove push button operator. To assemble push button operator to mounting ring, align arrows and snap into place.

**BOLD ITEMS ARE MOST POPULAR.**



## Functionality Explanation

Fluid Power		Universal Description	Electrical	
Function	Symbol		Function	Symbol
Normally Closed (N.C.)		Normally Non-Passing (NNP)	Normally Open (N.O.)	
Normally Open (N.O.)		Normally Passing (NP)	Normally Closed (N.C.)	

**Type of Switching:** Universal 3-Way: Valve can be connected either as NP or NNP as required by connecting the primary air supply to port 1 or port 3.




- NNP: Normally Non-Passing.
- NP: Normally Passing.
- NNP + NNP: Double Switch Body, Both Normally Non-Passing.
- NNP + NP: Normally Non passing and Normally-Passing.
- NP + NP: Both Normally Passing.


### Combination of Output Devices on a Single Mounting Block

Up to 3 output devices (valves or electrical contacts) can be mounted side by side on 1 mounting block.


**Note:** The central position can only be activated by push button heads.

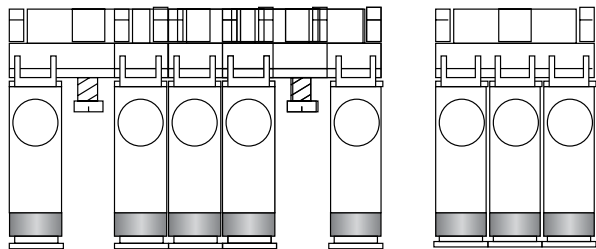

Electrical Contacts and Valves can be Combined Either Side by Side, or by Mounting the Valve on the Back of the Electrical Contact.




Side by Side Combination




Combination by Mounting Valves On the Back of the Electrical Contact

### Assembling Output Devices and Heads on ZB5 Series Mounting Block

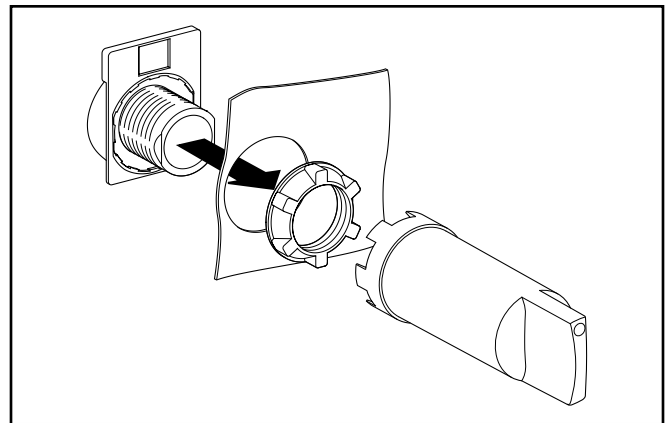

### Replacement Old Style Mounting

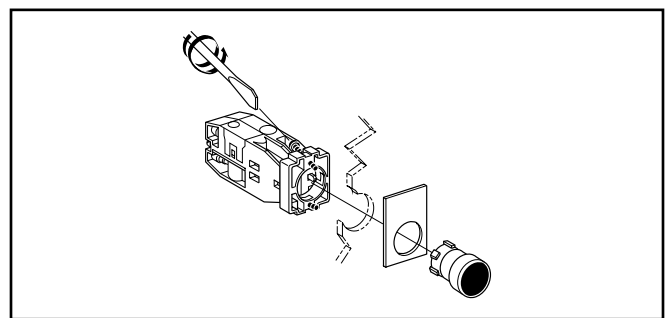

**A**

Basic Features

Push Buttons

Selector Switches

Valve Bodies & Accessories

Visual Indicators

Foot Pedal Operated Switches

Two Hand Controls


A
Basic Features
Push Buttons
Selector Switches
Valve Bodies & Accessories
Visual Indicators
Foot Pedal Operated Switches
Two Hand Controls

With 5/32" Instant Connections

**22mm Visual Indicators**



**PXVF131**

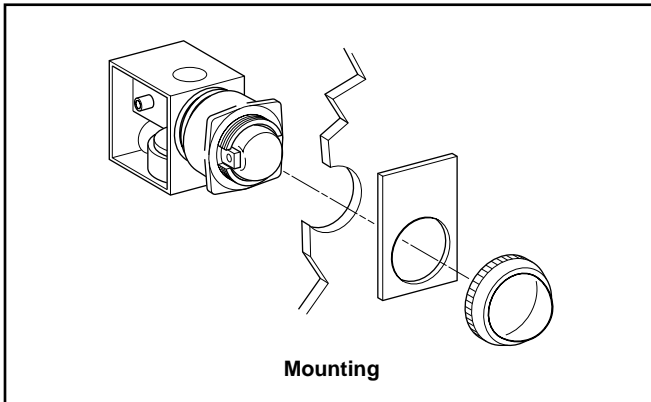

**Specifications**

- Air Quality – Standard Shop Air, Lubricated or Dry, 40µm Filtration
- Materials –
  - Body .....Polyamide
  - Operating Head .....Zinc Alloy & Plastic
- Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) - Frequency 1 Hz .....1 million Operations
  - Mushroom Head .....300,000 Operations
- Operating Positions .....All Positions
- Operating Pressure ..... 15 to 115 PSIG (1 to 8 bar)
- Ports –
  - Standard: 5/32" Instant for Semi- Rigid Nylon or Polyurethane Tube
  - 10-32 UNF Available.
- Temperature –
  - Operating ..... 32°F to 122°F (0°C to + 50°C)
  - Storage ..... -22°F to 140°F (-30°C to +60°C)


Black Plastic Bezel		
Part Number "ON" Indicator	Part Number "OFF" Indicator	Color
<b>PXVF131</b>	<b>PXVF1213</b>	Green
<b>PXVF141</b>	<b>PXVF1214</b>	Red
<b>PXVF151</b>	<b>PXVF1215</b>	Yellow
<b>PXVF161</b>	<b>PXVF1216</b>	Blue
<b>PXVF111</b>	<b>PXVF1211</b>	White

**Notes:**

- The Pneumatic Indicators are black in one position and colored in the other. The colored position corresponds either to the presence of a pressure ("ON" Indicator) or the absence of pressure ("OFF" Indicator).
- For Legend Plates, see page F9.

**Dimensions**

PXVF1••

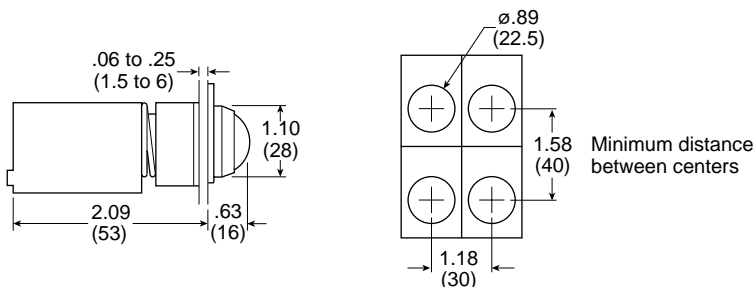

## Pre-Assembled Two-Hand Control Enclosure

### Features


- The pre-assembled two-hand control enclosure occupies both hands of an operator by requiring nearly simultaneous operation of two pushbuttons
- Poppet – snap-acting (no spools)
- Same air as in cylinders – Filtration: 40 micron
- No lubrication required



PXPC111

Part Number	Connections
PXPC111	5/32" Instant

### Operation



- Output "S" will appear only if "A" and "B" are simultaneously operated (within .5 seconds or less of each other).
- If the operator actuates only one pushbutton, either "A" or "B", or if both "A" and "B" are actuated but at an interval greater than .5 seconds, output "S" will not appear.
- Output "S" is regenerated by supply "P". Output "S" will therefore disappear if supply "P" is cut off.
- Output "S" will disappear if either "A" or "B" is released.
- If output "S" disappears for any reason, "A" and "B" must be nearly simultaneously actuated to again provide output "S".
- Since output "S" is regenerated it appears sharply, at full force (snap-acting), and is quickly exhausted upon deactivation. In addition the module is not affected by the length or diameter of tubing used for output "S".

### General Characteristics

**Operating Pressure** ..... 40 to 120 PSI (3 to 8 bar)

**Permissible Fluids** –

Air or neutral gas 40 micron filtration, lubricated or dry

**Flow at 90 PSI (6 bar)** ..... 7 SCFM (200 l/mn ANR)

**Operating Temperature** ..... -5°F to 140°F (-15°C to 60°C)  
 Below 40°F (5°C), an air dryer is required

**Storage Temperature** ..... -40°F to 160°F (-40°C to 70°C)

**Number of operations with dry air at 90 PSI (6 bar), 68°F (20°C), frequency 1 Hz** ..... 1 Million Operations

**Vibration resistance** –

Conforms to section 19-2 of bureau Veritas regulations.... (November 1987)

**Materials** –

Body..... Glass Filled Nylon

Operating Head ..... Zinc Alloy and Plastic

**Connections:**..... 5/32" instant

### Mounting Approvals:


- In accordance with European Standard EN 574 - September 1996
- Conforms to the model that has obtained CE Type Test Certificate No. 02526 520 4631 0397

### WARNING

These devices should **NOT** be used in any application involving rotary clutch presses. Two hand control modules do not of themselves insure the safety of any machine. Users and original equipment manufacturers are responsible for making sure that installations meet all relevant safety regulations.

### Dimensions


Inches (mm)

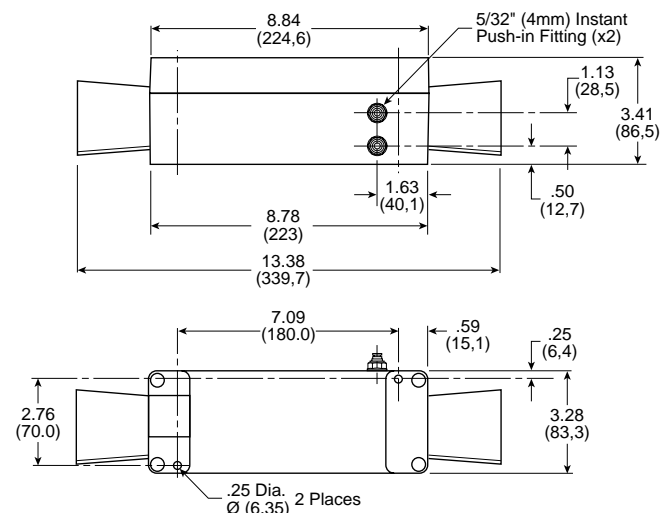

<b>A</b>
Basic Features
Push Buttons
Selector Switches
Valve Bodies & Accessories
Visual Indicators
Foot Pedal Operated Switches
Two Hand Controls

## Control Module & Repair Parts


### Two-Hand Control Module



PXPA11

Part Number	Connections
PXPA11	5/32" Instant

### Dimensions



PXPA11

### Specifications

Air Quality –  
 Standard Shop Air, Lubricated or Dry, 40µm Filtration  
 Flow at 90 PSI (6 bar) in SCFM (l/mn ANR)..... 7 (200)  
 Materials –  
 Body ..... Polyamide  
 Operating Head ..... Zinc Alloy & Plastic  
 Nominal Bore Ø in Inches (mm) ..... 7/64" (2.5)  
 Number of Operations with Dry Air at 90 PSI (6 bar) and 68°F (20°C) - Frequency 1 Hz ..... 1 million Operations  
 Operating Positions ..... All Positions  
 Operating Pressure ..... 40 to 115 PSIG (3 to 8 bar)  
 Ports –  
 5/32" Instant for Semi-Rigid Nylon or Polyurethane Tube  
 Temperature –  
 Operating ..... 32°F to 122°F (0°C to + 50°C)  
 Storage ..... -22°F to 140°F (-30°C to + 60°C)  
 Vibration resistance:  
 Conforms to section 19-2 of bureau Véritas regulations (November 1987)

⚠ <b>WARNING</b>
<p>These devices should <b>NOT</b> be used in any application involving rotary clutch presses. Two hand control modules do not of themselves insure the safety of any machine. Users and original equipment manufacturers are responsible for making sure that installations meet all relevant safety regulations.</p>

**Notes:** These two-hand control modules provide an output signal upon nearly concurrent operation of two pushbuttons.

### Two-Hand Control Module Guard



PPRL15

Part Number	Base Component
PPRL15	PXPC111

### Two Hand Repair Parts

Part Number	Quantity Required	Description
PXPA11	1	Control Module
PXBB3111B	2	Valve Body & Mounting Ring
ZB4BR*	2	Push Button
PPRL15	2	Control Module Guard

\* 2 = Black, 3 = Green, 4 = Red

# LV & EZ Series

## Lockout Valves, 3-Way, 3-Port, 2-Position

### Section B



“LV” & “EZ” Series..... B2

“LV” Series

- Basic Features ..... B3
- Applications..... B3
- Mounting ..... B3
- Ordering Information ..... B4
- Dimensions




  - Compact..... B5
  - Standard ..... B5
  - High Flow..... B5
  - Stainless Steel ..... B6

“EZ” Series

- Basic Features ..... B7
- Applications..... B7
- Mounting ..... B7
- Dimensions ..... B7
- Operation ..... B8
- Ordering Information ..... B8
- Flow ..... B9
- “LV” & “EZ” Series Accessories ..... B9

**Bold text part numbers are standard.**  
Standard text part numbers may have longer lead times.

# Parker is protecting your most valuable assets...

 www.osha.gov Standard 190.147	<ul style="list-style-type: none"> <li>• This applies to the servicing and maintenance of a machine or equipment.</li> <li>• Any new, replacement, repair, or renovation to a machine must include an energy isolation device that can accept a lock out device.</li> <li>• Lock out devices should not be used for any other purposes</li> <li>• Verification of energy isolation is required</li> </ul>
 Standard Z244	<ul style="list-style-type: none"> <li>• This applies to all machines</li> <li>• Lockout / tagout is the primary method of hazardous energy control</li> <li>• Machines shall be designed, manufactured, supplied, and installed with energy isolating devices</li> </ul>
	<ul style="list-style-type: none"> <li>• B11.0 applies to a broad range of machines, B11.TR6 is specific to machine tools, and B155.1 is specific to packaging and converting machines</li> <li>• Energy isolating device shall:                         <ul style="list-style-type: none"> <li>– Be capable of being locked in the OFF position only</li> <li>– Be easy to operate</li> <li>– Have an exhaust port equal or greater than its supply port</li> <li>– Have a pressure indicator that is visible to an operator to verify line is relieved of pressure</li> </ul> </li> </ul>

## ...By offering the best in pneumatic safety for machine maintenance:



### Traditional Ball Valve

- Not a dedicated energy isolation device
- Not a full exhaust port
- No verification of line exhaust
- Can be locked ON
- Not easily identifiable



### Parker Solution

- ✓ Dedicated energy isolation device
- ✓ Full exhaust port
- ✓ Verification of line exhaust
- ✓ Only lockable in OFF position
- ✓ Easily identifiable

## LV Series

### Features

Lockout valves are installed in pneumatic drop legs, or individual pneumatic control lines. In accordance with OSHA procedures, lockout valves are used during maintenance and service procedures of pneumatically (air) operated equipment.

- Used for compliance with OSHA 29 CFR part 1910
- 1/4" to 2" pipe sizes. NPT or BSPP
- Yellow cast aluminum body with red handle or stainless steel (NACE MR0175 / ISO 15156)
- Inline or surface mountable
- Built in port for pressure verification to meet ANSI B11 and PMMI B155 requirements



### Material specifications

Description	LV	LVSS
Body:	Cast aluminum alloy	Stainless steel
Handle:	Plastic	Stainless steel
Spool:	Aluminum	Stainless steel
Seals:	Carboxylated nitrile	Carboxylated nitrile
Detent spring:	Stainless steel	Stainless steel
Grease:	Magnalube G <sup>†</sup>	Magnalube G <sup>†</sup>

<sup>†</sup> Trademark Magnalube

### Operating information

Operating pressure:	LV	LVSS
Compact	15 to 145 PSIG	–
Standard	15 to 300 PSIG	15 to 300 PSIG
High flow	15 to 300 PSIG	–
Operating temperature:	40°F to 175°F	30°F to 175°F
Operating media:	Clean, dry, compressed air (5 micron)	


### Applications

Lockout valves are installed in pneumatic drop legs, or individual pneumatic control lines (see Figure 1). In accordance with OSHA procedures, lockout valves are used during maintenance and service procedures of pneumatically (air) operated equipment. Prior to servicing, the red handle is pressed inward, blocking pressure and relieving all downstream air pressure. A padlock is installed through the locking hasp, Preventing accidental actuation during the maintenance procedure. Following maintenance, the padlock is removed and the red handle is pulled outward, returning air pressure to the system. (For complete Lockout / Tagout procedures, consult OSHA Standard 29 CFR Part 1910 in U.S. Federal Register/Vol. 54 No. 169, Friday, September 1, 1989 / Page 36644.)

### Mounting

Valves can be inline mounted or surface mounted using the two mounting holes provided in the valve body. Mount valves in plain view with the handle oriented for accessibility.

### Placement of Lockout Device

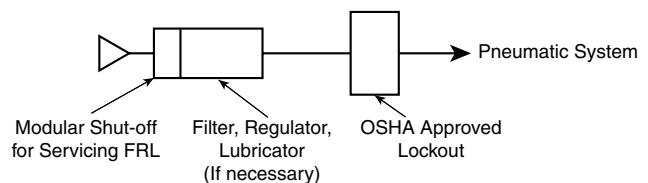



**Basic Features**

**Compact**



Port in / out	Port exhaust	Wt (lb)	Part number *
1/4	3/8	0.9	<b>LV2N3B</b>
3/8	3/8	0.9	<b>LV3N3B</b>

**Standard**



Port in / out	Port exhaust	Wt (lb)	Part number *
3/8	3/4	2.0	<b>LV3N6B</b>
1/2	3/4	2.0	<b>LV4N6B</b>
3/4	3/4	2.0	<b>LV6N6B</b>
3/4	1-1/4	3.2	<b>LV6NAB</b>
1	1-1/4	3.2	<b>LV8NAB</b>
1-1/4	1-1/4	3.2	<b>LVANAB</b>

**High Flow**



Port in / out	Port exhaust	Wt (lb)	Part number *
1-1/2	2	8.2	<b>LVBNCB</b>
2	2	8.2	<b>LVCNCB</b>

**Stainless Steel**




Port in / out	Port exhaust	Wt (lb)	Part number *
1/4	1/4	3.8	<b>LV2N2BSS</b>
3/8	1/2	6.0	<b>LV3N4BSS</b>
1/2	1/2	6.0	<b>LV4N4BSS</b>
3/4	1	13	<b>LV6N8BSS</b>
1	1	13	<b>LV8N8BSS</b>
1-1/2	2	35	<b>LVBNCBSS</b>
2	2	35	<b>LVCNCBSS</b>

\* For BSPP ports, change 4th digit from "N" to "B"

**Operation**

*Normal Machine Operation – Valve Open*


With the handle pulled outward. Inlet Port 1 is open to outlet Port 2. Exhaust Port 3 is blocked.

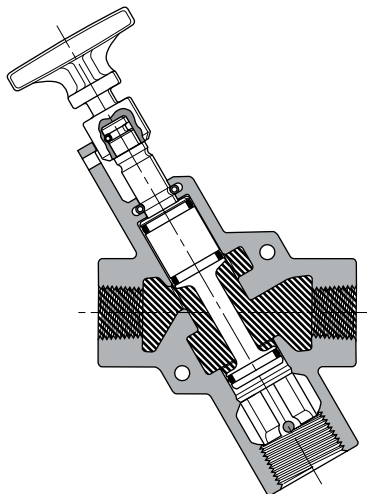

**LV Series Shown Open**

*Lockout Operation – Valve Closed*

With the handle pushed inward. Inlet Port 1 is blocked. Outlet Port 2 is open to Exhaust Port 3.

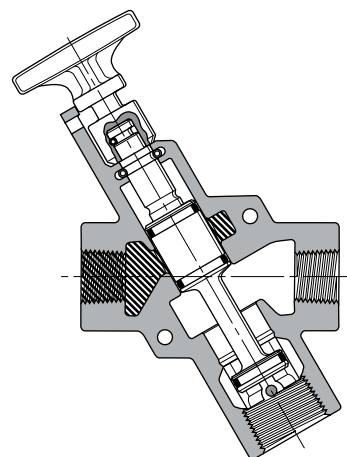


**LV Series Shown Closed**



**LV Dimensions**


**Compact**

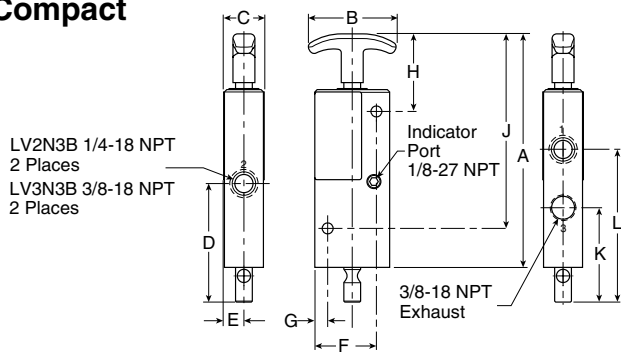

**Compact LV Series, 3/8" Exhaust Ports Inches (mm)**

<b>A</b> 6.50 (165)	<b>B</b> 2.25 (57)	<b>C</b> 1.05 (27)	<b>D</b> 3.04 (77)	<b>E</b> .51 (13)	<b>F</b> 1.58 (40)
<b>G</b> .33 (8)	<b>H</b> 1.99 (51)	<b>J</b> 4.99 (127)	<b>K</b> 2.42 (62)	<b>L</b> 3.92 (100)	

**Standard**

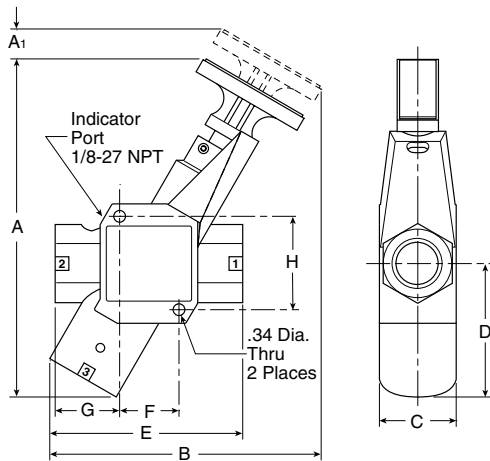


**Standard LV Series, 3/4" Exhaust Port Inches (mm)**

<b>A</b> 8.32 (211)	<b>A1</b> 0.64 (16)	<b>B</b> 6.60 (168)	<b>C</b> 2.00 (51)	<b>D</b> 3.06 (78)	<b>E</b> 4.24 (108)
<b>F</b> 1.32 (111)	<b>G</b> 1.56 (40)	<b>H</b> 2.21 (56)			

**Standard LV Series, 1-1/4" Exhaust Port Inches (mm)**

<b>A</b> 9.91 (252)	<b>A1</b> 0.85 (22)	<b>B</b> 7.95 (202)	<b>C</b> 2.25 (57)	<b>D</b> 3.91 (99)	<b>E</b> 5.65 (144)
<b>F</b> 1.74 (44)	<b>G</b> 1.89 (48)	<b>H</b> 2.74 (70)			

**High Flow**

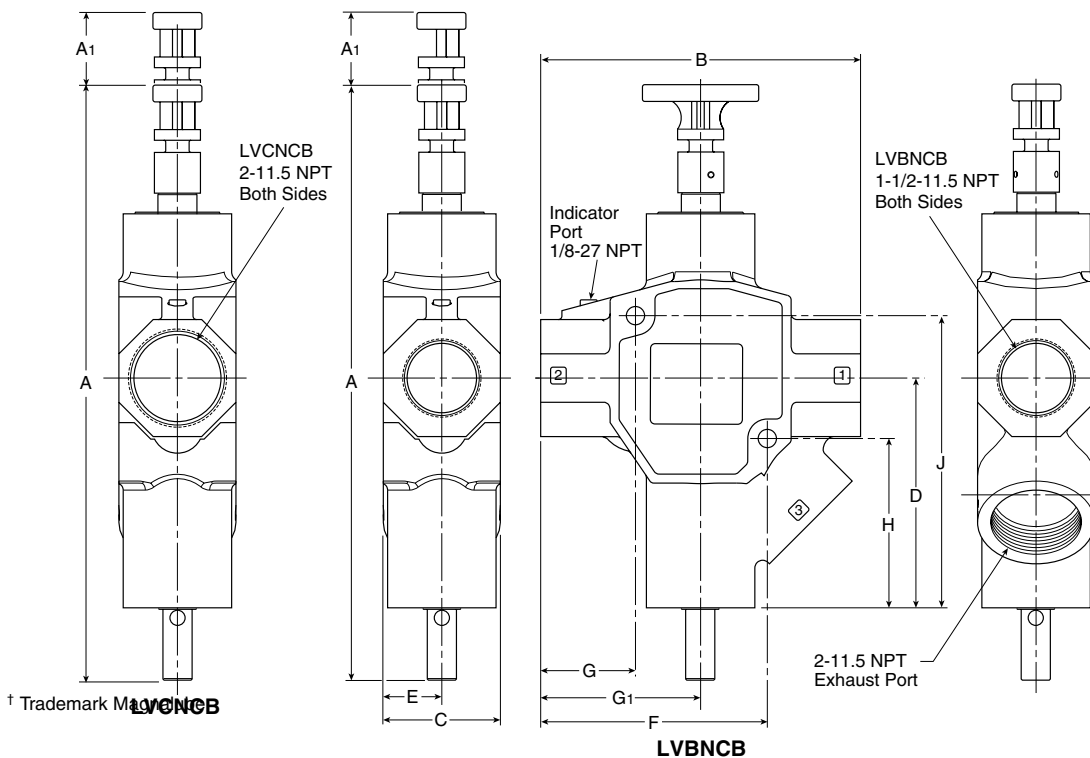

**High Flow LV Series, 2" Exhaust Ports Inches (mm)**

<b>A</b> 14.82 (376)	<b>A1</b> 1.87 (47)
<b>B</b> 8.20 (208)	<b>C</b> 3.00 (76)
<b>D</b> 5.89 (150)	<b>E</b> 1.50 (38)
<b>F</b> 5.81 (148)	<b>G</b> 2.43 (62)
<b>G1</b> 4.10 (104)	<b>H</b> 4.34 (110)
<b>J</b> 7.49 (190)	

**B**  
LV Series  
EZ Series


† Trademark of LVBNCB

**Stainless Steel Dimensions**

**B**


LV Series

EZ Series

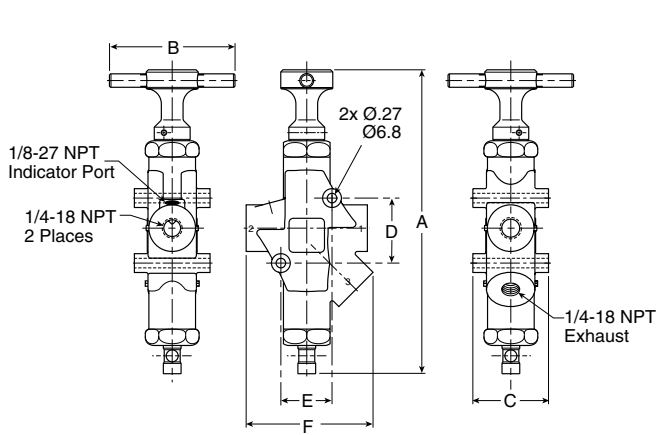


**Stainless Steel LV Series, 1/4" Exhaust Port**  
 inches (mm)

A	B	C	D	E	F
8.47 (215)	3.50 (89)	2.11 (54)	1.81 (46)	1.43 (36)	3.54 (90)

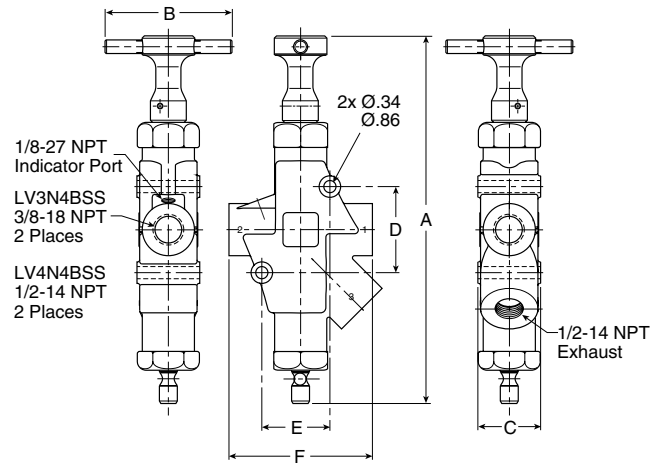


**Stainless Steel LV Series, 1/2" Exhaust Port**  
 inches (mm)

A	B	C	D	E	F
10.24 (260)	3.50 (89)	1.75 (45)	2.40 (61)	1.90 (48)	4.00 (102)

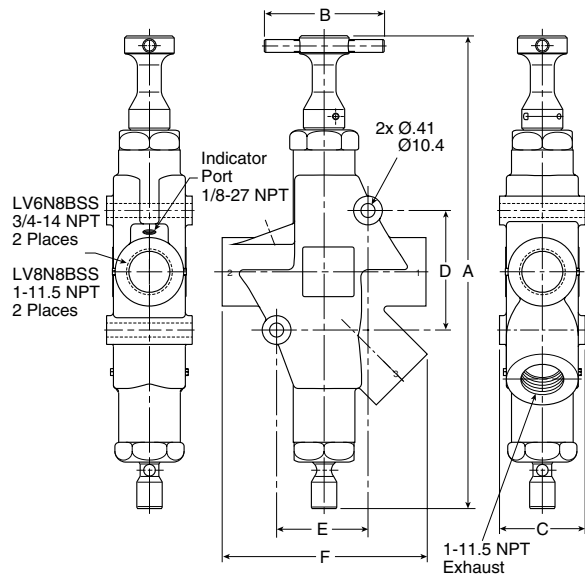

**Stainless Steel LV Series, 1" Exhaust Port**  
 inches (mm)

A	B	C	D	E	F
13.80 (351)	3.50 (89)	2.50 (64)	3.49 (89)	2.67 (68)	5.99 (152)

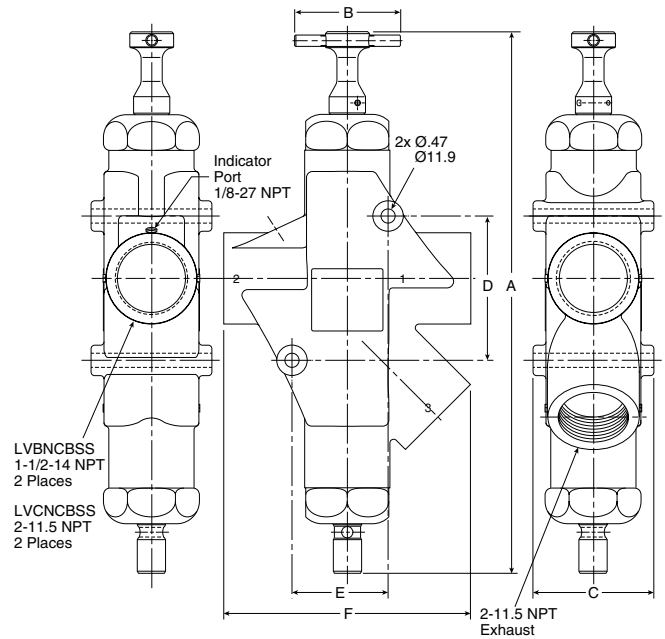

**Stainless Steel LV Series, 2" Exhaust Port**  
 inches (mm)

A	B	C	D	E	F
17.92 (455)	3.50 (89)	4.00 (102)	4.77 (121)	3.18 (81)	8.16 (207)

## EZ Series

### Features

- Combines lockout and soft-start functions in a single unit
- Used in systems for compliance with OSHA standard 29 CFR part 1910
- 3/8 Inch to 1-1/4 inch pipe sizes
- Cv's from 3.7 To 13.7
- 3/4 and 1-1/4 inch: exhaust ports available
- Exhaust port threaded for installation of silencer or line for remote exhausting
- Inline or surface mountable
- Yellow cast aluminum body with red handle. Blue dot on body indicates EZ Series valve

### Material specifications

Description	EZ
Body:	Cast aluminum alloy
Handle:	Plastic
Spool:	Aluminum
Seals:	Carboxylated nitrile
Detent spring:	Stainless steel
Grease:	Magnalube G <sup>†</sup>


<sup>†</sup> Trademark Magnalube

### Applications

EZ valves are installed in pneumatic drop legs, or individual pneumatic control lines (see Figure 1). In accordance with OSHA procedures, EZ valves are used during maintenance and service procedures of pneumatically (air) operated equipment. Prior to servicing, the red handle is pressed inward, blocking pressure and relieving all downstream air pressure. A padlock is installed through the locking hasp, preventing accidental actuation during the maintenance procedure. Following maintenance, the padlock is removed and the red handle is pulled outward, gradually returning air pressure to the system. (For complete Lockout / Tagout procedures, consult OSHA Standard 29 CFR Part 1910 in U.S. Federal Register/ Vol. 54 No. 169, Friday, September 1, 1989 / Page 36644.)

### Mounting


Valves can be inline mounted or surface mounted using the two 11/32" mounting holes provided in the valve body. Mount valves in plain view with the handle oriented for accessibility.

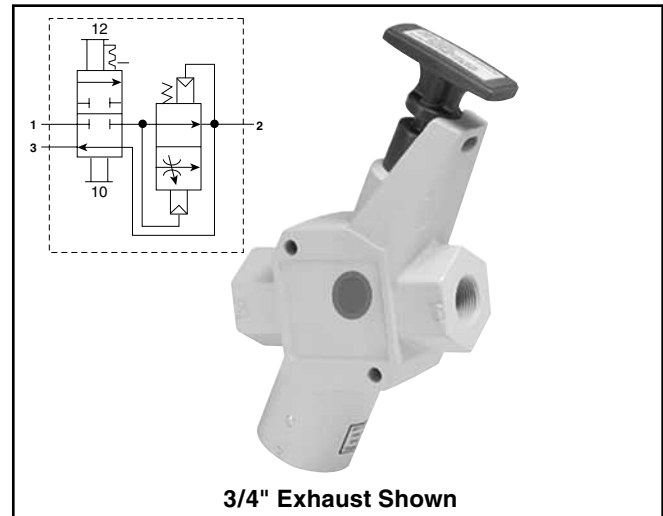

### Operating information

Operating pressure:	15 to 300 PSIG
Operating temperature:	40°F to 175°F
Operating media:	Clean, dry, compressed air (5 micron)

### EZ Dimensions

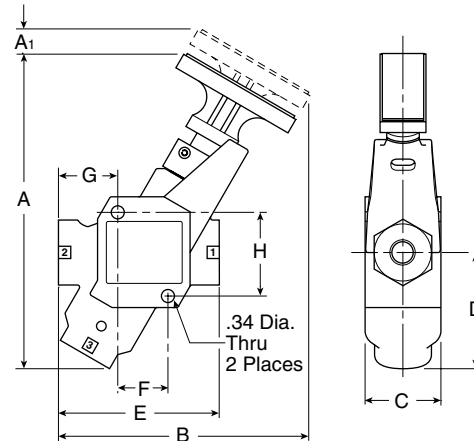

#### EZ Series, 3/4" Exhaust Port Inches (mm)

A	A1	B	C	D	E
8.32 (211)	0.64 (16)	6.60 (168)	2.00 (51)	3.06 (78)	4.24 (108)
F	G	H			
1.32 (111)	1.56 (40)	2.21 (56)			

#### EZ Series, 1-1/4" Exhaust Port Inches (mm)

A	A1	B	C	D	E
9.91 (252)	0.85 (22)	7.95 (202)	2.25 (57)	3.91 (99)	5.65 (144)
F	G	H			
1.74 (44)	1.89 (48)	2.74 (70)			

**Basic Features**

**EZ Series**



Port in / out	Port exhaust	Wt (lb)	Part Number *
3/8	3/4	2.1	<b>EZ03NB6</b>
1/2	3/4	2.1	<b>EZ04NB6</b>
3/4	3/4	2.1	<b>EZ06NB6</b>
3/4	1-1/4	3.2	<b>EZ06NBA</b>
1	1-1/4	3.2	<b>EZ08NBA</b>
1-1/4	1-1/4	3.2	<b>EZ0ANBA</b>

\* For BSPP ports, change 5th digit from "N" to "B"

**B**

LV Series

EZ Series


**Operation**

*Normal Machine Operation – Valve Open*

When the red handle is pulled outward, the adjustable needle valve (accessed through the top of the handle) setting determines the rate of pressure buildup. When downstream pressure reaches the full flow described in the specifications below, Inlet Port 1 is open to outlet Port 2. Exhaust Port 3 is blocked.


*Lockout Operation – Valve Closed*

When the red handle is pushed inward, the Inlet Port 1 is blocked. Downstream air is exhausted through Exhaust Port 3.

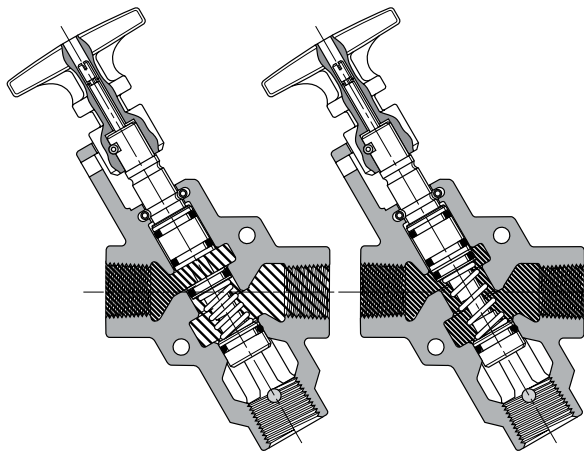

**Open  
Pressure Building Up**

**Open  
Full Flow**

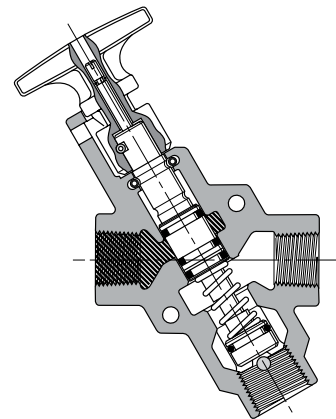

**Closed**

**Technical Information**

**Flow**

Compact LV Series Part Number	Port In / Out	scfm In / Out	Port Exh	scfm Exh
LV2N3B	1/4	41.8	3/8	40.7
LV3N3B	3/8	60.7	3/8	60.7

Standard LV Series Part Number	Port In / Out	scfm In / Out	Port Exh	scfm Exh
LV3N6B	3/8	107.7	3/4	81.1
LV4N6B	1/2	161.4	3/4	90.9
LV6N6B	3/4	187.7	3/4	93.2
LV6NAB	3/4	297.7	1-1/4	204
LV8NAB	1	375	1-1/4	216
LVANAB	1-1/4	436.4	1-1/4	221

High FLOW LV Series Part Number	Port In / Out	scfm In / Out	Port Exh	scfm Exh
LVBNCB	1-1/2	761.4	2	1156
LVCNCB	2	918.2	2	1186

EZ Series Part Number	Port In / Out	scfm In / Out	Port Exh	scfm Exh
EZ03NB6	3/8	136.4	3/4	181
EZ04NB6	1/2	161.4	3/4	189
EZ06NB6	3/4	181.9	3/4	216
EZ06NBA	3/4	272.7	1-1/4	248
EZ08NBA	1	311.4	1-1/4	273
EZOANBA	1-1/4	368.2	1-1/4	291

Stainless LV Series Part Number	Port In / Out	scfm In / Out	Port Exh	scfm Exh
LV2N2BSS	1/4	48.6	1/4	47.2
LV3N4BSS	3/8	131.6	1/2	142
LV4N4BSS	1/2	124.8	1/2	142
LV6N8BSS	3/4	325	1	386
LV8N8BSS	1	325	1	386
LVBNCBSS	1-1/2	889	2	1023
LVCNCBSS	2	889	2	1023

**B**  
LV Series  
EZ Series

**LV / EZ Accessories**

**Corrosion resistant mufflers for harsh environments**



Port Size	Construction	Threads*	Dimensions In. (mm)		Part Number
			Width	Length	
1/4	Stainless steel	Male	0.56 (14.2)	1.75 (44.5)	<b>5500A2004</b>
1/2	Stainless steel	Male	0.87 (22.1)	2.75 (69.7)	<b>5500A4004</b>
1	Stainless steel	Male	1.31 (33.3)	3.87 (98.3)	<b>5500A6004</b>
2	Nickel plated	Male	2.37 (60.2)	5.50 (139.7)	<b>5500A9004</b>

\* NPT threads only

**High Flow Silencers**



Part Number *	ES25MC	ES37MC	ES50MC	ES75MC	ES100MC	ES125MC	ES150MC	ES200MC
<b>Pipe size</b>	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
<b>Flow (scfm)</b>	129	219	549	893	1013	1486	1580	1580
<b>Hex In. (mm)</b>	0.63 (16)	1.00 (25)	1.00 (25)	1.62 (41)	1.62 (41)	—	—	2.99 (76)
<b>Length In. (mm)</b>	1.85 (47)	3.31 (84)	3.31 (84)	4.56 (116)	4.56 (116)	5.69 (145)	5.69 (145)	7.68 (195)

\* NPT ports standard, for BSPT ports, add a "B" after the "S"

**Pop-up Pressure Indicator**



**Brass** – Part # 988A30 – Can be used on all LV or EZ series to provide visual verification of line exhaust



**Stainless** – Part# 1155H30 – Can be used on SS LV series to provide visual verification of line exhaust

**Pressure Switch**



- Part # PPS1-2C3-RHM (DIN 9.4mm connector)
- Part # PPS1-2C3-RWL (18" leads)
- Signal verification of line exhaust
- Field adjustable set point

**Notes**


**B**

LV Series

EZ Series

# Integrated Fittings



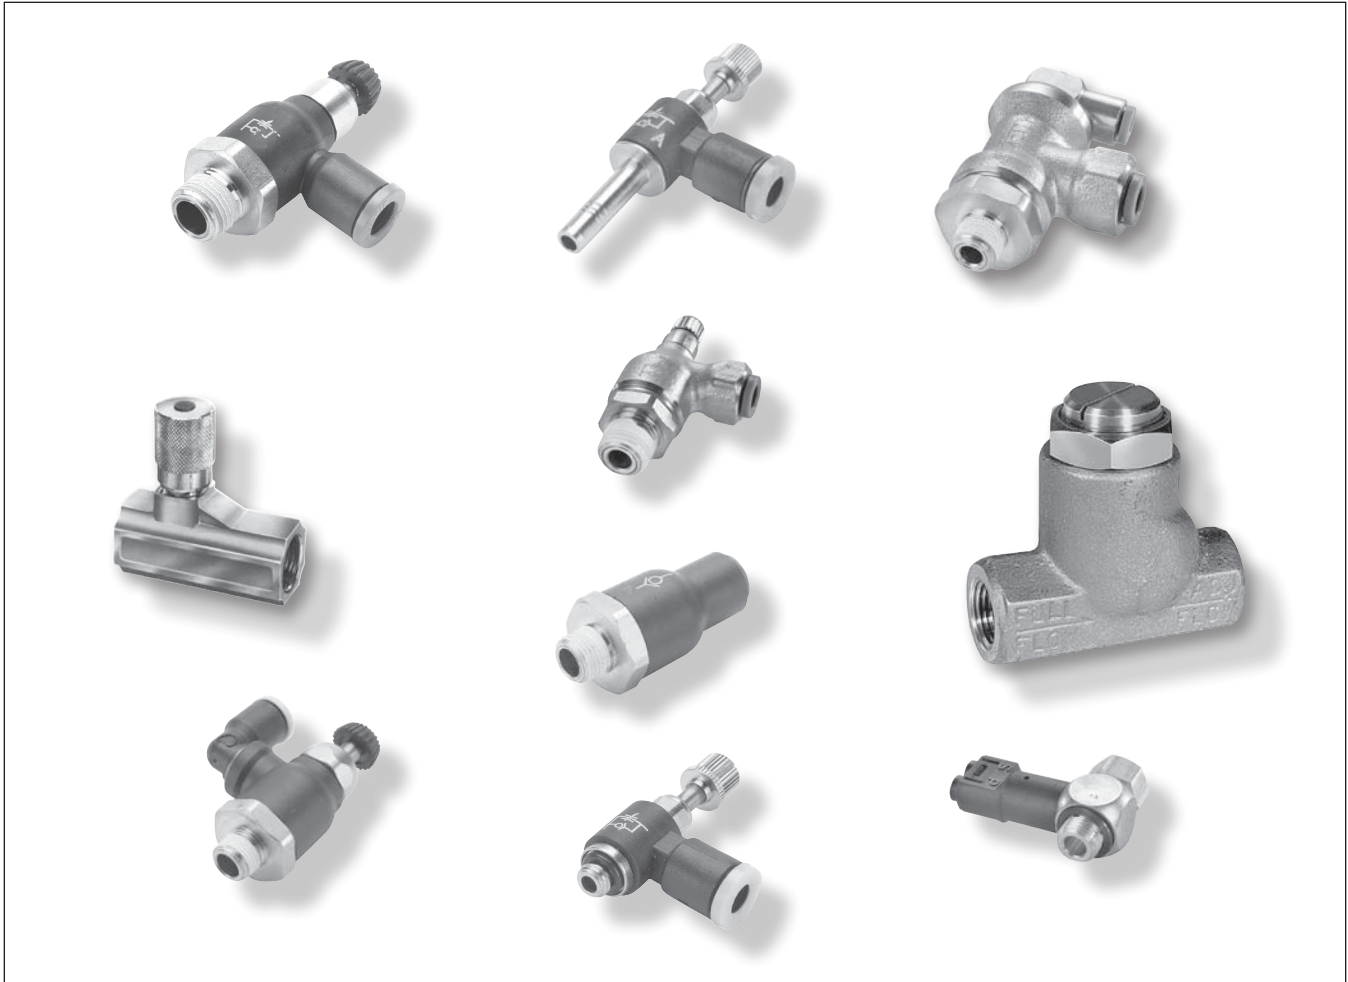




























## Section C















Product Index
Compact Flow Controls
Miniature Flow Controls
Swivel Flow Controls
Plug-In Flow Controls
In-Line Flow Controls
Metal Flow Controls
Check Valves
Blocking Valves
Threshold Sensors

Product Index .....	C2-C3	In-line Flow Control Valves .....	C12-C15
Compact Flow Control Valves .....	C4-C5	Compact Metal Flow Control Valves.....	C16-C17
Miniature Flow Control Valves .....	C6-C7	Check Valves .....	C18-C20
Swivel Outlet Flow Control Valves.....	C8-C9	Blocking Flow Controls Valves.....	C22-C23
Plug-in Flow Control Valves.....	C10-C11	Threshold Sensor .....	C24-C25

<b>C</b>
Product Index
Compact Flow Controls
Miniature Flow Controls
Swivel Flow Controls
Plug-In Flow Controls
In-Line Flow Controls
Metal Flow Controls
Check Valves
Blocking Valves
Threshold Sensors

<b>Compact Flow Control Valves</b>	<p><b>FCC731</b> Meter Out</p>  <p style="text-align: right;">Page C4</p>	<p><b>FCC731</b> Meter Out - BSPP</p>  <p style="text-align: right;">Page C4</p>	<p><b>FCCB731</b> Bi-Directional Flow Control</p>  <p style="text-align: right;">Page C5</p>	<p><b>FCCB731</b> Bi-directional Flow Control - BSPP</p>  <p style="text-align: right;">Page C5</p>	<p><b>FCKC731</b> Knobless Meter Out Flow Control</p>  <p style="text-align: right;">Page C5</p>
<p><b>FCKC731</b> Knobless Flow Control - BSPP</p>  <p style="text-align: right;">Page C5</p>	<p><b>FCKCB731</b> Knobless Bi-directional Flow Control - BSPP</p>  <p style="text-align: right;">Page C5</p>	<b>Miniature Flow Control Valves</b>	<p><b>FCM731</b> Meter Out Flow Control</p>  <p style="text-align: right;">Page C7</p>	<p><b>FCM731</b> Flow Control - BSPP</p>  <p style="text-align: right;">Page C7</p>	<p><b>FCMB731</b> Bi-directional Flow Control - BSPP</p>  <p style="text-align: right;">Page C7</p>
<p><b>FCMK731</b> Knobless Mini Meter Out Flow Control</p>  <p style="text-align: right;">Page C7</p>	<b>Swivel Outlet Flow Control Valves</b>	<p><b>FCCS731</b> Compact Swivel Outlet Flow Control</p>  <p style="text-align: right;">Page C9</p>	<p><b>FCMS731</b> Mini Swivel Outlet Flow Control</p>  <p style="text-align: right;">Page C9</p>	<p><b>FCMS731</b> Miniature Swivel Outlet - BSPP</p>  <p style="text-align: right;">Page C9</p>	<p><b>FCCS731</b> Compact Swivel Outlet - BSPP</p>  <p style="text-align: right;">Page C9</p>
<b>Plug-In Flow Control Valves</b>	<p><b>FCMSP731</b> Mini Flow Control</p>  <p style="text-align: right;">Page C11</p>	<p><b>FCMSP701</b> Miniature Flow Control</p>  <p style="text-align: right;">Page C11</p>	<p><b>FCCSP731</b> Compact Flow Control</p>  <p style="text-align: right;">Page C11</p>	<b>In-Line Flow Control Valves</b>	
<p><b>FCB832</b> Bi-directional Flow Control</p>  <p style="text-align: right;">Page C13</p>	<p><b>FC832</b> Flow Control</p>  <p style="text-align: right;">Page C13</p>	<p><b>FCB832</b> Bi-directional Flow Control</p>  <p style="text-align: right;">Page C13</p>	<p><b>FCPM832</b> Panel Mountable Flow Control</p>  <p style="text-align: right;">Page C13</p>	<p><b>FC836</b> Threaded Flow Control</p>  <p style="text-align: right;">Page C13</p>	<p><b>FC836</b> Threaded Flow Control - BSPP</p>  <p style="text-align: right;">Page C14</p>
<p><b>337 Series</b> Micrometer Flow Control Valves</p>  <p style="text-align: right;">Page C14</p>	<p><b>337 Series</b> Micrometer Flow Control Valves - BSPP</p>  <p style="text-align: right;">Page C14</p>	<p><b>338 Series</b> Bi-directional Flow Control Valves</p>  <p style="text-align: right;">Page C14</p>	<p><b>338 Series</b> Bi-directional Flow Control Valves - BSPP</p>  <p style="text-align: right;">Page C14</p>	<p><b>3250 Series</b> Flow Control Valves</p>  <p style="text-align: right;">Page C15</p>	<p><b>3250 Series</b> Flow Control Valves - BSPP</p>  <p style="text-align: right;">Page C15</p>
<p><b>3250 Series</b> Flow Control Valves</p>  <p style="text-align: right;">Page C15</p>	<p><b>3250 Series</b> Flow Control Valves - BSPP</p>  <p style="text-align: right;">Page C15</p>	<b>Compact Metal Flow Control Valves</b>	<p><b>3251 Series</b> Right Angle Flow Control Valves</p>  <p style="text-align: right;">Page C17</p>	<p><b>FC705</b> Push-to-Connect Metal Flow Control</p>  <p style="text-align: right;">Page C17</p>	<p><b>FC701</b> Push-to-Connect Metal Flow Control - BSPP</p>  <p style="text-align: right;">Page C17</p>
<p><b>FC708</b> Threaded Port Meter Out Flow Control</p>  <p style="text-align: right;">Page C17</p>	<p><b>FC702</b> Threaded Port Metal Flow Control - BSPP</p>  <p style="text-align: right;">Page C17</p>	<b>Flow Control Check Valves</b>	<p><b>32PLCK</b> In-Line Check Valve</p>  <p style="text-align: right;">Page C19</p>	<p><b>32PLCK</b> In-Line Check Valve</p>  <p style="text-align: right;">Page C19</p>	<p><b>W68PLCK</b> Male Check Valve</p>  <p style="text-align: right;">Page C19</p>



<p><b>W68PLCKI</b> Male Check Valve Meter In</p>  <p>Page C19</p>	<p><b>68PLCK</b> Male Check Valve Meter Out - BSPP</p>  <p>Page C19</p>	<p><b>68PLCKI</b> Male Check Valve Meter In - BSPP</p>  <p>Page C19</p>	<p><b>VC</b> Check Valve</p>  <p>Page C19</p>	<p><b>339 Series</b> Check Valve</p>  <p>Page C20</p>	<p><b>339 Series</b> Check Valve - BSPP</p>  <p>Page C20</p>	
<p><b>3047 Series</b> Check Valve</p>  <p>Page C20</p>	<p><b>Blocking Flow Control Valves</b></p>		<p><b>FC601</b> Push-to-Connect Lock Out Valves</p>  <p>Page C23</p>	<p><b>FC601</b> Push-to-Connect Lock-Out Valve - BSPP</p>  <p>Page C23</p>	<p><b>FC602</b> Threaded Port Lock Out Valves</p>  <p>Page C23</p>	<p><b>FC608</b> Threaded Port Lock-Out Valve - BSPP</p>  <p>Page C23</p>
<p><b>Threshold Sensor</b></p>		<p><b>PSBJ731</b> Pneumatic - 5/32 Pilot</p>  <p>Page C25</p>	<p><b>PSBJ731</b> Pneumatic - 4mm Pilot</p>  <p>Page C25</p>	<p><b>PSPJ731</b> Pneumatic - 10-32 Pilot</p>  <p>Page C25</p>	<p><b>PSBJ708</b> Pneumatic - M5 Pilot</p>  <p>Page C25</p>	<p><b>PSPE701</b> Pneumatic / Electric - BSPP</p>  <p>Page C25</p>

<b>C</b>
Product Index
Compact Flow Controls
Miniature Flow Controls
Swivel Flow Controls
Plug-In Flow Controls
In-Line Flow Controls
Metal Flow Controls
Check Valves
Blocking Valves
Threshold Sensors

Features

Materials Of Construction	
Body (Depending upon the Model):	<ul style="list-style-type: none"> <li>• Glass reinforced nylon 6.6</li> <li>• Brass</li> </ul>
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass

Nomenclature	
<b>Example:FCC731-4-2</b>	<b>Attribute:</b>
FC	Flow control
C	Compact
7	Right angle
3	Nylon body
1	Tube x Pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread



Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air



Compact flow control regulators ensure excellent performance of flow and are perfectly suited for reduced spaces due to their small size. The sensitivity of the adjustment screw provides very precise air flow control and regulation. A locking nut guarantees stability of adjustment against vibration tampering of the flow setting.

- C
- Product Index
- Compact Flow Controls
- Miniature Flow Controls
- Swivel Flow Controls
- Plug-in Flow Controls
- In-Line Flow Controls
- Metal Flow Controls
- Check Valves
- Blocking Valves
- Threshold Sensors

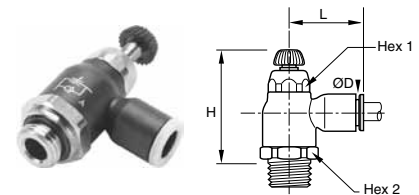


FCC731 Compact Meter Out

Part No.	Tube Size (In)	NPT	Hex 1 (In)	Hex 2 (In)	H Open	H Closed	L
FCC731-5/32-2	5/32	1/8	0.63	0.39	1.67	1.44	0.85
FCC731-5/32-4	5/32	1/4	0.63	0.39	1.67	1.44	0.85
FCC731-4-2	1/4	1/8	0.63	0.39	1.67	1.44	0.85
FCC731-4-4	1/4	1/4	0.63	0.39	1.67	1.44	0.85
FCC731-6-4	3/8	1/4	0.91	0.67	2.03	1.71	1.22
FCC731-6-6	3/8	3/8	0.91	0.67	2.03	1.71	1.22


FCC731 Compact Meter Out - BSPP

Part No.	Tube Size (mm)	BSPT	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	L
FCC731-4M-2G	4	1/8	10	16	38.0	44.0	22.0
FCC731-6M-2G	6	1/8	10	16	38.0	44.0	22.0
FCC731-6M-4G	6	1/4	10	16	36.5	42.5	22.0
FCC731-8M-2G	8	1/8	14	19	41.5	48.0	28.0
FCC731-8M-4G	8	1/4	14	19	41.5	48.0	28.0
FCC731-8M-6G	8	3/8	14	19	41.5	48.0	28.0
FCC731-10M-4G	10	1/4	17	23	45.5	53.5	31.5
FCC731-10M-6G	10	3/8	17	23	45.5	54.0	31.5
FCC731-12M-6G	12	3/8	17	23	45.5	54.0	35.0
FCC731-12M-8G	12	1/2	17	24	45.5	54.0	35.0

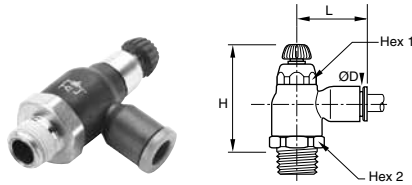


**FCCB731 Compact Bi-Directional Flow Control**

Part No.	Tube Size (In)	NPT	Hex 1 (In)	Hex 2 (In)	H Open	H Closed	L
FCCB731-5/32-2	5/32	1/8	0.63	0.39	1.67	1.44	0.85
FCCB731-4-2	1/4	1/8	0.63	0.39	1.67	1.44	0.85
FCCB731-4-4	1/4	1/4	0.63	0.39	1.67	1.44	0.85

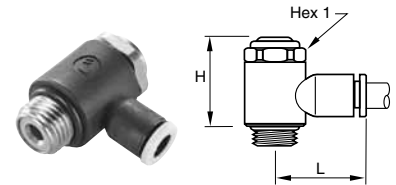


**FCKC731 Knobless Compact Flow Control - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	Hex 1 (mm)	H	L
FCKC731-4M-M5	4	M5x0.8	8.0	17.5	17.0
FCKC731-4M-2G	4	1/8	13.0	25.0	19.0
FCKC731-6M-M5	6	M5x0.8	8.0	17.5	19.0
FCKC731-6M-2G	6	1/8	13.0	25.0	21.0
FCKC731-6M-4G	6	1/4	17.0	26.5	22.0
FCKC731-8M-2G	8	1/8	13.0	25.0	26.0
FCKC731-8M-4G	8	1/4	17.0	26.5	27.0
FCKC731-8M-6G	8	3/8	20.0	37.5	29.0
FCKC731-10M-4G	10	1/4	17.0	26.5	29.0
FCKC731-10M-6G	10	3/8	20.0	37.5	31.0
FCKC731-10M-8G	10	1/2	23.0	43.0	37.0
FCKC731-12M-6G	12	3/8	20.0	37.5	6.8
FCKC731-12M-8G	12	1/2	23.0	43.0	37.0

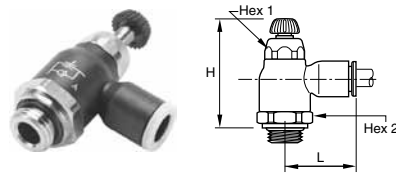

**FCCB731 Compact Bi-directional Flow Control - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	L
FCCB731-4M-2G	4	1/8	10	16	38.0	44.0	22.0
FCCB731-6M-2G	6	1/8	10	16	38.0	44.0	22.0
FCCB731-6M-4G	6	1/4	10	16	36.5	42.5	22.0
FCCB731-8M-2G	8	1/8	14	19	41.5	48.0	28.0
FCCB731-8M-4G	8	1/4	14	19	41.5	48.0	28.0
FCCB731-8M-6G	8	3/8	14	19	41.5	48.0	28.0

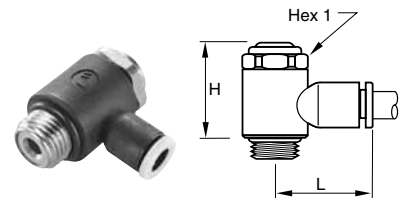

**FCKCB731 Knobless Bi-directional Flow Control - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	Hex 1 (mm)	H	L
FCKCB731-4M-M5	4	M5x0.8	8	17.5	17.0
FCKCB731-4M-2G	4	1/8	13	25.0	19.0
FCKCB731-6M-M5	6	M5x0.8	8	17.5	19.0
FCKCB731-6M-2G	6	1/8	13	25.0	21.0
FCKCB731-6M-4G	6	1/4	17	26.5	22.0
FCKCB731-8M-2G	8	1/8	13	25.0	26.0
FCKCB731-8M-4G	8	1/4	17	26.5	27.0
FCKCB731-8M-6G	8	3/8	20	37.5	29.0

**FCKC731 Knobless Meter Out Flow Control**

Part No.	Tube Size (In)	NPT / UNF	Hex 1 (mm)	H	L
FCKC731-2-0	1/8	10-32		0.69	0.65
FCKC731-2-2	1/8	1/8	13	0.79	0.75
FCKC731-5/32-0	5/32	10-32		0.69	0.65
FCKC731-5/32-2	5/32	1/8	13	0.79	0.75
FCKC731-4-0	1/4	10-32		0.69	0.77
FCKC731-4-2	1/4	1/8	13	0.79	0.85
FCKC731-4-4	1/4	1/4	17	1.04	0.89
FCKC731-5-2	5/16	1/8	13	0.79	1.02
FCKC731-5-4	5/16	1/4	17	1.04	1.06
FCKC731-6-4	3/8	1/4	17	1.04	1.14
FCKC731-6-6	3/8	3/8	20	1.14	1.36

C	Product Index
	Compact Flow Controls
Miniature Flow Controls	
Swivel Flow Controls	
Plug-In Flow Controls	
In-Line Flow Controls	
Metal Flow Controls	
Check Valves	
Blocking Valves	
Threshold Sensors	

**Features**

Materials of Construction	
Body (Depending upon the Model):	<ul style="list-style-type: none"> <li>• Glass reinforced nylon 6.6</li> <li>• Brass</li> </ul>
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass

Nomenclature	
Example: FCM731-4-2	Attribute:
FC	Flow control
M	Miniature
7	Right angle
3	Nylon body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4
Tube O.D. (mm)	3, 4, 6, 8

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air



The miniature flow control regulator is especially adapted for all very small sized pneumatic applications (micro-pneumatic in particular). They are specifically designed for use with small bore cylinders (pancake / flat cylinders). Miniature flow control regulators are available in meter out, meter in and bi-directional versions.

**C**

Product Index

Compact Flow Controls

Miniature Flow Controls

Swivel Flow Controls

Plug-in Flow Controls


In-Line Flow Controls

Metal Flow Controls

Check Valves


Blocking Valves

Threshold Sensors

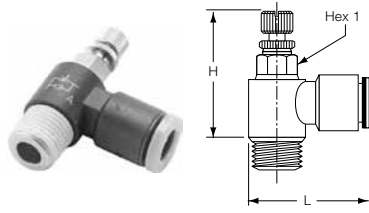


**FCM731 Miniature Meter Out Flow Control**

Part No.	Tube Size (In)	NPT	Hex 1 mm	H Open	H Closed	L
FCM731-2-0	1/8	10-32	6	1.14	0.91	0.67
FCM731-2-2	1/8	1/8	7	1.41	1.26	0.69
FCM731-5/32-0	5/32	10-32	6	1.02	0.93	0.67
FCM731-5/32-2	5/32	1/8	7	1.16	1.06	0.71
FCM731-4-0	1/4	10-32	6	1.02	0.93	0.73
FCM731-4-2	1/4	1/8	7	1.16	1.06	0.75
FCM731-4-4	1/4	1/4	8	1.28	1.18	0.77

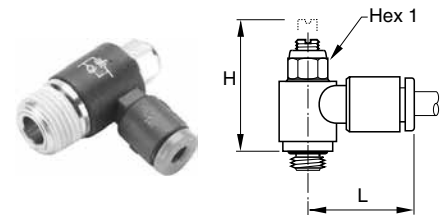


**FCMK731 Knobless Mini Meter Out Flow Control**

Part No.	Tube Size (In)	NPT	Hex 1 mm	H Open	H Closed	L
FCMK731-2-0	1/8	10-32	6	0.79	0.65	0.65
FCMK731-2-2	1/8	1/8	6	0.85	0.71	0.71
FCMK731-5/32-0	5/32	10-32	6	0.79	0.65	0.65
FCMK731-5/32-2	5/32	1/8	6	0.85	0.71	0.71
FCMK731-4-0	1/4	10-32	6	0.79	0.65	0.65
FCMK731-4-2	1/4	1/8	6	0.85	0.71	0.73
FCMK731-4-4	1/4	1/4	6	0.97	0.83	0.73



**FCM731 Miniature Flow Control - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1	H Closed	H Open	L
FCM731-3M-M3	3	M3x0.5	6	23.5	26.0	17.0
FCM731-3M-M5	3	M5x0.8	6	23.5	26.0	17.0
FCM731-4M-M3	4	M3x0.5	6	23.5	26.0	16.5
FCM731-4M-M5	4	M5x0.8	6	23.5	26.0	17.0
FCM731-4M-2G	4	1/8	7	27.0	29.5	18.0
FCM731-6M-M5	6	M5x0.8	6	23.5	26.0	18.0
FCM731-6M-2G	6	1/8	7	27.0	29.5	18.5
FCM731-6M-4G	6	1/4	8	30.0	32.5	19.0
FCM731-8M-2G	8	1/8	13	26.5	31.0	26.0
FCM731-8M-4G	8	1/4	16	29.0	34.0	27.5
FCM731-8M-6G	8	3/8	20	36.0	42.0	29.0

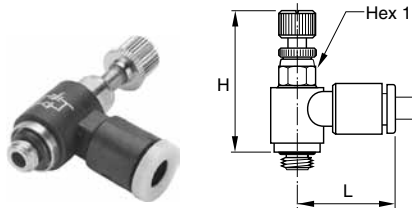

**FCMB731 Miniature Bi-directional Flow Control - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1	H Closed	H Open	L
FCMB731-4M-M5	4	M5x0.8	6	23.5	26.0	16.5
FCMB731-4M-2G	4	1/8	7	27.0	29.5	17.0
FCMB731-6M-M5	6	M5x0.8	6	23.5	26.0	18.0
FCMB731-6M-2G	6	1/8	7	27.0	29.5	18.0
FCMB731-6M-4G	6	1/4	8	30.0	32.5	18.5

C	Product Index
Compact Flow Controls	
Miniature Flow Controls	
Swivel Flow Controls	
Plug-In Flow Controls	
In-Line Flow Controls	
Metal Flow Controls	
Check Valves	
Blocking Valves	
Threshold Sensors	

**Features**

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Base:	Nickel-plated brass





Flow control regulators with “swivel outlet” are especially designed to allow a vertical or angled tube exit where access is restricted. The swivel outlet comes with instant push-in connection to ease installation. Flow control regulators with swivel outlet are available in meter out and meter in versions.

Nomenclature	
Example: FCMS731-5/32-2	Attribute:
FC	Flow control
M	Miniature
s	Swivel outlet
7	Right angle
3	Nylon body
1	Tube x pipe
5/32	5/32 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

C	Product Index
	Compact Flow Controls
C	Miniature Flow Controls
	Swivel Flow Controls
C	Plug-in Flow Controls
	In-Line Flow Controls
C	Metal Flow Controls
	Check Valves
C	Blocking Valves
	Threshold Sensors

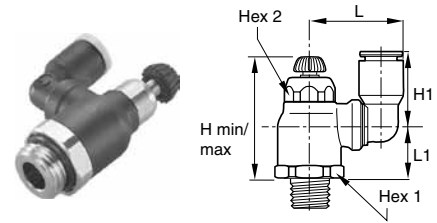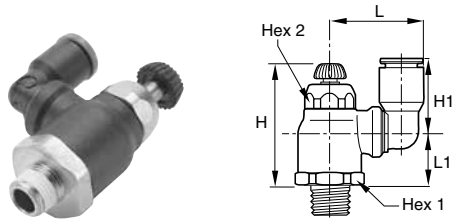


**FCCS731 Compact Swivel Outlet Flow Control**

Part No.	Tube Size (in)	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	H1	L	L1
FCCS731-4-2	1/4	1/8	19	10	1.87	2.09	0.63	0.93	0.65
FCCS731-4-4	1/4	1/4	19	14	1.79	1.99	0.73	1.00	0.89
FCCS731-6-4	3/8	1/4	23	17	1.93	2.20	1.04	1.34	0.97
FCCS731-6-6	3/8	3/8	23	17	1.93	2.20	1.04	1.34	0.97


**FCCS731 Compact Swivel Outlet - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1 mm	Hex 2 mm	H Closed	H Open	H1	L	L1
FCCS731-6M-2G	6	1/8	16	10	38.0	44.0	16.0	23.5	18.0
FCCS731-6M-4G	6	1/4	16	10	36.5	42.5	16.0	23.5	16.5
FCCS731-8M-2G	8	1/8	19	14	41.5	48.0	23.0	28.0	19.0
FCCS731-8M-4G	8	1/4	19	14	41.5	48.0	23.0	28.0	19.5
FCCS731-8M-6G	10	3/8	19	14	41.5	48.0	23.0	28.0	17.5
FCCS731-10M-4G	10	1/4	23	17	45.5	53.5	26.5	35.0	21.0
FCCS731-10M-6G	10	3/8	23	17	45.5	54.0	26.5	35.0	21.5
FCCS731-12M-6G	12	3/8	23	17	45.5	54.0	31.0	38.0	21.5
FCCS731-12M-8G	12	1/2	23	17	45.5	54.0	31.0	38.0	21.0

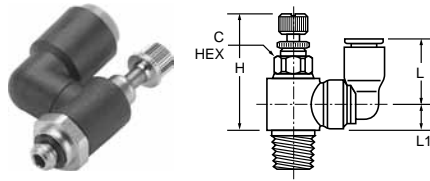

**FCMS731 Mini Swivel Outlet Flow Control**

Part No.	Tube Size (in)	NPT	Hex 1 mm	H Closed	H Open	H1	L	L1
FCMS731-5/32-0	5/32	10-32	6	0.96	1.08	0.55	0.73	0.26
FCMS731-5/32-2	5/32	1/8	8	1.08	1.20	0.55	0.73	0.33

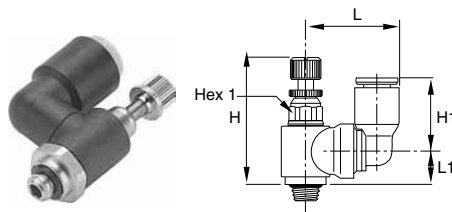

**FCMS731 Miniature Swivel Outlet - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1 mm	H Closed	H Open	H1	L	L1
FCMS731-4M-M5	4	M5x0.8	6	24.5	27.5	14.5	19.5	6.5
FCMS731-4M-2G	4	1/8	7	27.5	31.0	14.5	20.0	8.5
FCMS731-6M-M5	6	M5x0.8	6	24.5	27.5	16.0	21.5	6.5
FCMS731-6M-2G	6	1/8	7	27.5	31.0	16.0	22.0	8.5

C	Product Index
Compact Flow Controls	Product Index
Miniature Flow Controls	Product Index
Swivel Flow Controls	Product Index
Plug-In Flow Controls	Product Index
In-Line Flow Controls	Product Index
Metal Flow Controls	Product Index
Check Valves	Product Index
Blocking Valves	Product Index
Threshold Sensors	Product Index

**Features**

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass



Nomenclature	
Example: FCMS731-5/32-2	Attribute:
FC	Flow control
M	Miniature
7	Right angle
3	Nylon body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread


Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4
Tube O.D. (mm)	4, 6, 8, 10, 12

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Plug-in flow control regulators can be directly mounted into existing fittings and allow very compact installations. They are particularly suited for mounting in manifolds using cartridges. Their design and function give equal performance to that of flow control regulators with threaded connections.


C	Product Index
	Compact Flow Controls
C	Miniature Flow Controls
	Swivel Flow Controls
C	Plug-in Flow Controls
	In-Line Flow Controls
C	Metal Flow Controls
	Check Valves
C	Blocking Valves
	Threshold Sensors



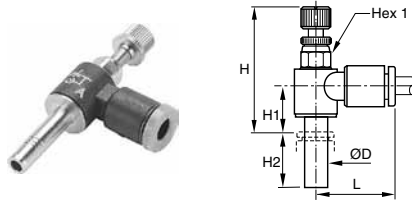


**FCMS731 Plug-In Mini Flow Control**

Part No.	Tube Size (In)	Hex 1 mm	H Open	H Closed	H1	H2	L
FCMS731-2	1/8	6	1.04	0.94	0.12	0.59	0.67
FCMS731-5/32	5/32	6	1.10	1.00	0.37	0.61	0.67
FCMS731-4	1/4	7	1.18	1.08	0.12	0.73	0.73

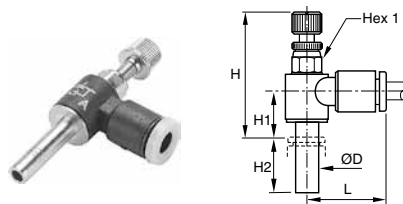

**FCMS701 - Plug-In Miniature Flow Control**

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	H1	H2	L
FCMS701-4M	4	6	25.5	28.0	9.5	15.5	17.0
FCMS701-6M	6	7	27.5	29.0	10.5	17.0	18.5

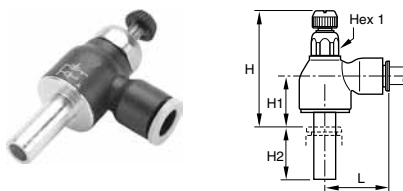

**FCCSP731 Plug-In Compact Flow Control**

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	H1	H2	L
FCCSP731-6M	6	10	35.0	41.0	14.0	17.0	22.0
FCCSP731-8M	8	14	39.5	46.5	16.0	21.5	28.0
FCCSP731-10M	10	17	43.5	51.5	17.5	24.5	31.5
FCCSP731-12M	12	17	43.0	51.0	17.0	27.0	31.5



Product Index

Compact Flow Controls

Miniature Flow Controls

Swivel Flow Controls

Plug-In Flow Controls

In-Line Flow Controls

Metal Flow Controls

Check Valves

Blocking Valves

Threshold Sensors


**Features**

Materials of Construction	
Body:	Glass reinforced nylon 6.6
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass

Nomenclature	
<b>Example:</b> FCMS731-5/32-2	<b>Attribute:</b>
FC	Flow control
M	Miniature
8	In-line
3	Nylon body
2	Tube x pipe
4	1/4 Tube O.D.

Applicable Tube	
Tube O.D.	5/32, 1/4, 5/16, 3/8, 1/2
Tube O.D. (mm)	4, 6, 8, 10, 12


Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

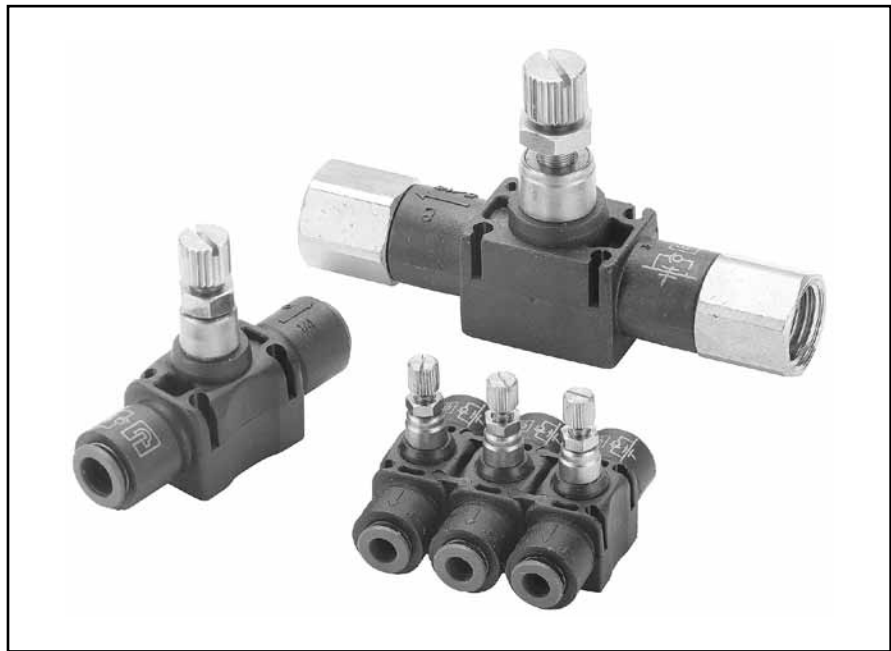

In-line flow controls are unidirectional flow control valves. Intake air flows freely through the flow control; exhaust air is metered out through a specially designed adjustment screw. An arrow on the body of the valve indicates the direction of controlled flow. They can be easily added to existing circuitry. Simply splice it into the cylinder port line.


They can be used individually or they may be stacked together using two joining clips.

C	Product Index
	Compact Flow Controls
C	Miniature Flow Controls
	Swivel Flow Controls
C	Plug-in Flow Controls
	In-Line Flow Controls
C	Metal Flow Controls
	Check Valves
C	Blocking Valves
	Threshold Sensors

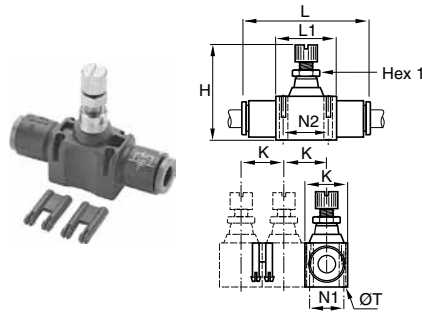


**FC832 In-Line Flow Control**

Part No.	Tube Size (In)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FC832-5/32	5/32	5	1.15	1.31	0.47	1.52	0.59	0.31	0.43	0.09
FC832-4	1/4	8	1.54	1.74	0.66	2.00	0.90	0.43	0.66	0.12
FC832-5	5/16	11	1.73	1.97	0.73	2.38	1.02	0.49	0.79	0.13
FC832-6	3/8	14	2.03	2.38	0.94	2.87	1.29	0.62	1.01	1.60
FC832-8	1/2	14	2.24	2.63	1.09	3.35	1.37	0.78	1.07	0.16

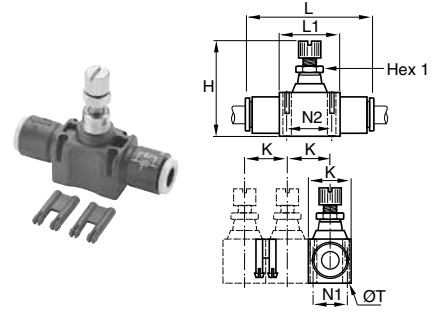


**FCB832 In-Line Bi-directional Flow Control - BSSP**

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FCB832-4M	4	5	29.5	33.5	12.0	39.0	15.0	8.0	11.0	2.2
FCB832-6M	6	8	39.5	44.5	17.0	54.0	23.0	11.0	17.0	3.2
FCB832-8M	8	11	44.0	50.0	18.5	60.5	26.0	12.5	20.0	3.2

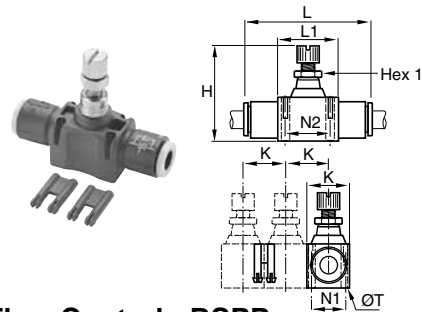


**FC832 In-Line Flow Control - BSSP**

Part No.	Tube Size (mm)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FC832-4M	4	5	29.5	33.5	12.0	39.0	15.0	8.0	11.0	2.2
FC832-6M	6	8	39.5	44.5	17.0	54.0	23.0	11.0	17.0	3.2
FC832-8M	8	11	44.0	50.0	18.5	60.5	26.0	12.5	20.0	3.2
FC832-10M	10	14	52.0	61.0	24.0	76.0	33.0	16.0	26.0	4.2
FC832-12M	12	14	57.5	67.5	28.0	86.0	35.0	20.0	27.5	4.2

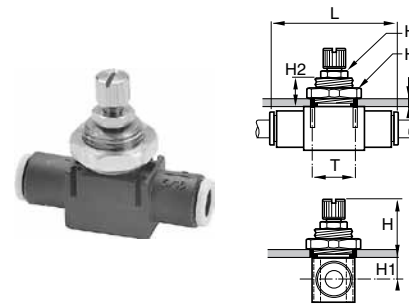


**FCPM832 In-Line Panel Mountable Flow Control - BSSP**

Part No.	Tube Size (mm)	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	H1	H2	T
FCPM832-4M	4	14		21.5	25.5	6.0	39.0	6.5	11.0	10.5
FCPM832-6M	6	19		27.5	32.5	7.0	54.0	7.5	13.5	16.5
FCPM832-8M	8	24	11	28.5	34.5	7.0	60.5	9.0	13.5	18.5
FCPM832-10M	10	30	14	29.5	38.5	7.0	76.0	11.5	13.5	24.5
FCPM832-12M	12	32	14	32.0	42.0	8.0	86.0	12.5	15.5	27.5

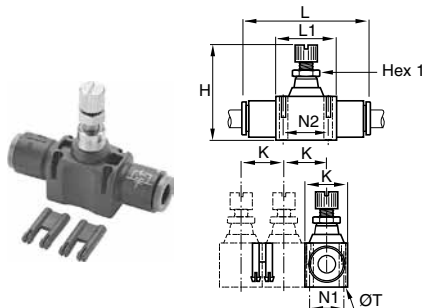

**FCB832 In-Line Bi-directional Flow Control**


Part No.	Tube Size (In)	Hex 1 mm	H Closed	H Open	K	L	L1	N1	N2	T
FCB832-5/32	5/32	5	1.15	1.31	0.47	1.52	0.59	0.31	0.43	0.09
FCB832-4	1/4	8	1.54	1.74	0.66	2.00	0.90	0.43	0.66	0.12
FCB832-5	5/16	11	1.73	1.97	0.73	2.38	1.02	0.49	0.79	0.13

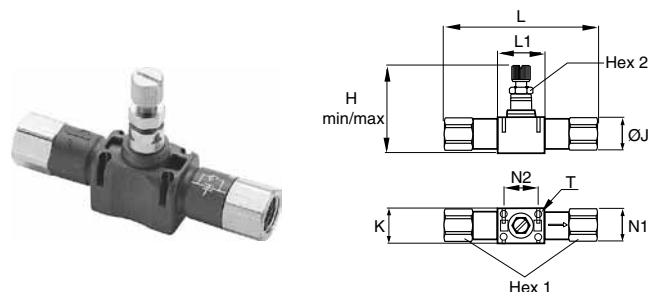

**FC836 Threaded In-Line Flow Control**


Part No.	NPT	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	L1	N1	N2	T
FC836-2	1/8	13	8.00	1.56	1.75	0.67	2.70	0.91	0.43	0.67	0.12
FC836-4	1/4	16	11.00	1.73	1.97	0.73	3.27	1.02	0.49	0.79	0.12
FC836-6	3/8	22	14.00	2.05	2.40	0.94	3.82	1.30	0.63	1.02	0.16
FC836-8	1/2	24	14.00	2.26	2.66	1.10	4.76	1.38	0.79	1.08	0.16

<b>C</b>	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-In Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors

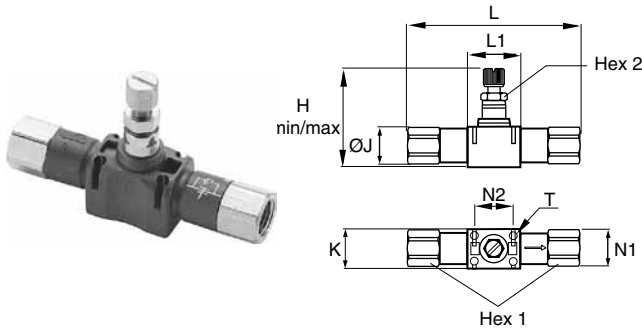


**FC836 Threaded In-Line Flow Control - BSPP**

Part No.	BSPP	Hex 1 (mm)	Hex 2 (mm)	H Closed	H Open	K	L	N1	N2	T
FC836-2G	1/8"	13	8	39.5	44.5	17.0	68.5	11.0	17.0	3.2
FC836-4G	1/4"	16	11	44.0	50.0	18.5	83.0	12.5	20.0	3.2
FC836-6G	3/8"	19	14	52.0	61.0	24.0	97.0	16.0	26.0	4.2
FC836-8G	1/2"	24	14	57.5	67.5	28.0	121.0	20.0	27.5	4.2

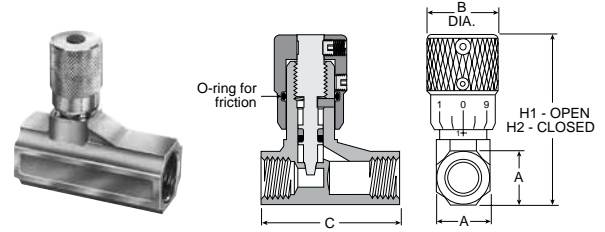


**338 Bi-directional Flow Control Valves**

Part No.	Port Size	A	B	C	H1	H2
00338 1100	1/8"	9/16"	0.75	1.47	2.03	1.81
00338 1101	1/4"	11/16"	0.75	1.47	2.28	2.03
00338 1102	3/8"	7/8"	0.88	2.31	2.84	2.53
00338 1103	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00338 1104	3/4"	1-3/8"	1.06	3.25	3.72	3.31

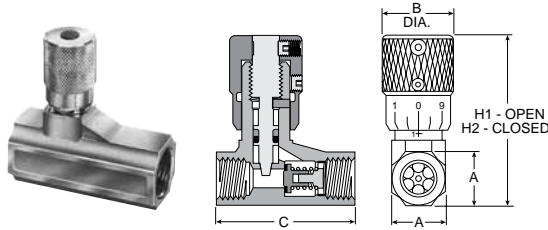


**337 Micrometer Flow Control Valves**

Part No.	Port Size	A	B	C	H1	H2
00337 1000	1/8"	9/16"	0.75	1.47	2.03	1.81
00337 1001	1/4"	11/16"	0.75	1.47	2.28	2.03
00337 1002	3/8"	7/8"	0.88	2.31	2.84	2.53
00337 1003	1/2"	1-3/16"	1.06	3.25	3.62	3.22
00337 1004	3/4"	1-3/8"	1.06	3.25	3.72	3.31

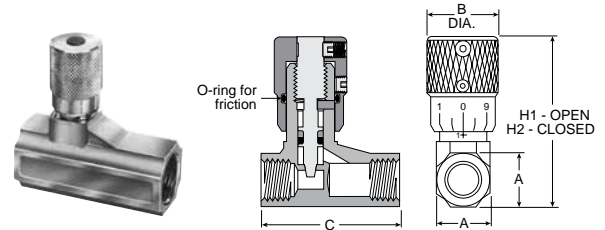

**338 Bi-directional Flow Control Valves - BSPP**



Part No.	Port Size	A	B	C	H1	H2
00338G1100	1/8"	9/16"	0.75	1.47	2.03	1.81
00338G1101	1/4"	11/16"	0.75	1.47	2.28	2.03

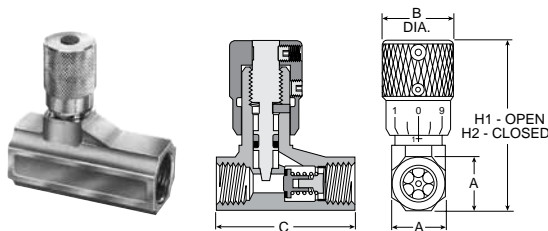

**337 Micrometer Flow Control Valves - BSPP**

Part No.	Port Size	A	B	C	H1	H2
00337G1000	1/8"	9/16"	0.75	1.47	2.03	1.81
00337G1001	1/4"	11/16"	0.75	1.47	2.28	2.03

Product Index	Compact Flow Controls	Miniature Flow Controls	Swivel Flow Controls	Plug-in Flow Controls	In-Line Flow Controls	Metal Flow Controls	Check Valves	Blocking Valves	Threshold Sensors
---------------	-----------------------	-------------------------	----------------------	-----------------------	-----------------------	---------------------	--------------	-----------------	-------------------

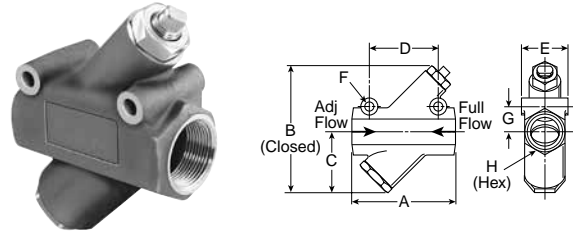
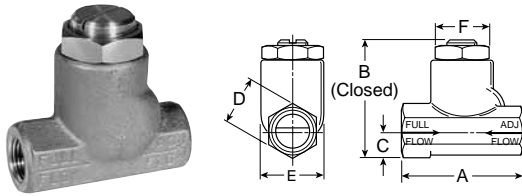


**3250 Flow Control Valves**

Part No.	Port Size	A	B	C	D	E	F
03250 0119	1/8"	1.75	1.56	0.37	0.62	0.81	0.68
03250 0219	1/4"	2.33	1.97	0.44	0.75	1.09	0.94
03250 0319	3/8"	2.66	2.44	0.56	1.00	1.38	1.19
03250 0419	1/2"	3.11	3.06	0.75	1.25	1.63	1.38
03250 0519	3/4"	3.56	3.69	0.88	1.50	2.00	1.75

**3250 Flow Control Valves**

Part No.	Port Size	A	B	C	D	E	F	G	H
03250 1000	1"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
03250 1250	1-1/4"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
03250 1500	1-1/2"	5.88	8.00	3.75	3.50	2.50	.39	1.50	2.38

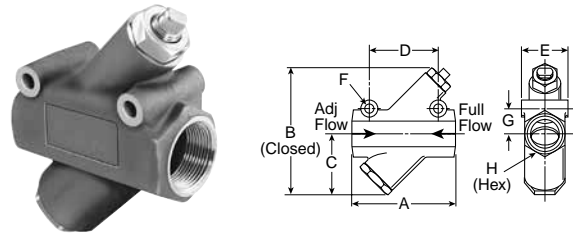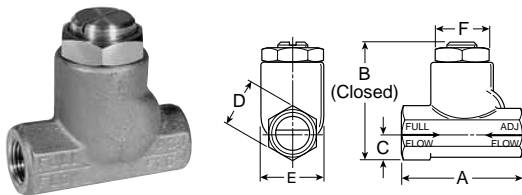

**3250 Flow Control Valves - BSPP**

Part No.	Port Size	A	B	C	D	E	F
3250G0119	1/8"	1.75	1.56	0.37	0.62	0.81	0.68
3250G0219	1/4"	2.33	1.97	0.44	0.75	1.09	0.94
3250G0319	3/8"	2.66	2.44	0.56	1.00	1.38	1.19
3250G0419	1/2"	3.11	3.06	0.75	1.25	1.63	1.38
3250G0519	3/4"	3.56	3.69	0.88	1.50	2.00	1.75

**3250 Flow Control Valves - BSPP**

Part No.	Port Size	A	B	C	D	E	F	G	H
3250G1000	1"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
3250G1250	1-1/4"	5.00	6.50	3.00	3.25	2.25	.39	1.31	2.13
3250G1500	1-1/2"	5.88	8.00	3.75	3.50	2.50	.39	1.50	2.38

**C**

Product Index

Compact Flow Controls

Miniature Flow Controls

Swivel Flow Controls

Plug-In Flow Controls

In-Line Flow Controls

Metal Flow Controls

Check Valves

Blocking Valves

Threshold Sensors

**Features**

Materials of Construction	
Body:	Treated Brass
Gripping Ring:	Stainless Steel
Adjustment Screws	Nickel-plated brass
Locking Nut:	Nickel-plated brass
Tailpiece:	Nickel-plated brass




Nomenclature	
Example: FCMS731-5/32-2	Attribute:
FC	Flow control
7	Right angle
0	Brass body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread

Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12, 14

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	30° to 160°F
Working Fluid:	Compressed air

Metal flow control regulators are suited for use in severe conditions (temperatures, sparks, abrasion, etc). The screw and locking nut have been designed for easy manipulation, by hand. Adjustment can be made with a screwdriver and locking by use of a wrench.

C	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-in Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors

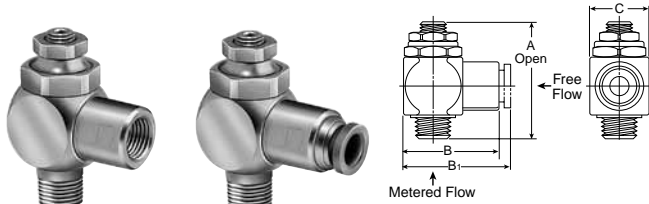


Shown with  
Threaded Inlet

Shown with  
Prestolok  
Inlet Fitting

**3251 Flow Control Valves**


Model Number	Thread (NPT) Male	Thread (NPT) Female	A mm	B mm	C mm	Weight		Cv	
						kg.	Adjusted Flow	Free Flow	
03251 0125	1/8	1/8	44	30	17	0.9	0.26	0.20	
03251 0250	1/4	1/4	51	36	23	2.0	0.75	0.68	
03251 0375	3/8	3/8	58	43	27	3.2	0.84	0.72	
03251 0500	1/2	1/2	68	53	32	5.0	1.64	1.41	
<b>With Prestolok Fittings</b>									
03251 1215	1/8	5/32	44	30	17	0.9	0.19	0.16	
03251 1225	1/8	1/4	44	30	17	0.9	0.28	0.22	
03251 2525	1/4	1/4	51	36	23	2.0	0.51	0.44	
03251 2538	1/4	3/8	51	36	23	2.0	0.62	0.53	
03251 3838	3/8	3/8	58	43	27	3.2	0.78	0.65	

**CAUTION:** If it is possible that the ambient temperature may fall below freezing, the medium must be moisture-free to prevent internal damage or unpredictable behavior.

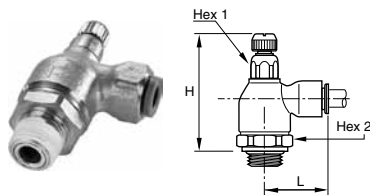


**FC705 Push-to-Connect Metal Flow Control**

Part No.	Tube Size (in)	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	L
FC705-5/32-2	5/32	1/8	19	10	1.79	2.01	0.85
FC705-4-2	1/4	1/8	19	10	1.79	2.01	0.97
FC705-4-4	1/4	1/4	19	10	1.79	2.01	0.97
FC705-6-4	3/8	1/4	19	14	1.91	2.11	1.14
FC705-6-6	3/8	3/8	25	17	2.15	2.40	1.40

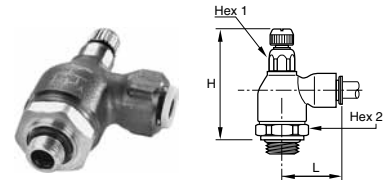


**FC701 Push-to-Connect Metal Flow Control - BSSP**

Part No.	Tube Size (mm)	BSSP	Hex 1	Hex 2	H Closed	H Open	L
FC701-4M-2G	4	1/8	10	19	47.0	53.0	21.0
FC701-6M-2G	6	1/8	10	19	47.0	53.0	24.5
FC701-6M-4G	6	1/4	10	19	47.5	53.0	24.5
FC701-8M-2G	8	1/8	14	19	50.0	55.0	29.0
FC701-8M-4G	8	1/4	14	19	50.0	56.0	29.0
FC701-8M-6G	8	3/8	17	25	56.0	62.0	30.5
FC701-10M-4G	10	1/4	14	19	50.0	56.0	35.0
FC701-10M-6G	10	3/8	17	25	56.0	62.0	35.0
FC701-12M-6G	12	3/8	17	25	56.0	62.0	38.0
FC701-12M-8G	12	1/2	17	25	55.0	62.0	38.0
FC701-14M-8G	14	1/2	17	25	55.0	62.0	41.0

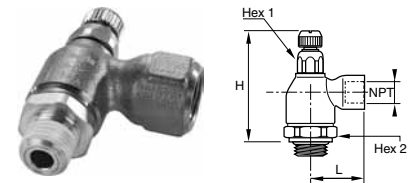

**FC708 Threaded Port Meter Out Flow Control**

Part No.	NPT	Hex 1 mm	Hex 2 mm	H Closed	H Open	L	L1	L2
FC708-2	1/8	19	10	1.79	2.01	0.89	0.87	1.14
FC708-4	1/4	19	14	1.91	2.11	1.28	0.87	1.28
FC708-6	3/8	25	17	2.15	2.40	1.36	0.91	1.44
FC708-8	1/2	25	17	2.15	2.40	1.50	0.91	1.50

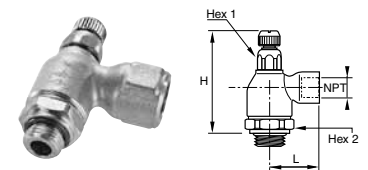

**FC702 Threaded Port Metal Flow Control - BSSP**

Part No.	BSSP	Hex 1 mm	Hex 2 mm	H Closed	H Open	L
FC702-2G	1/8	10	19	47.0	52.5	22.5
FC702-4G	1/4	14	19	50.5	55.5	32.0
FC702-6G	3/8	17	25	56.0	62.0	34.5
FC702-8G	1/2	17	25	55.0	62.0	37.5



Features

Materials of Construction	
Body:	<ul style="list-style-type: none"> <li>• 32PLCK: Nylon/nickel plated brass</li> <li>• 68PLCK: Nylon body with nickel-plated brass base</li> <li>• VC: Acetal</li> </ul>
Gripping Ring:	Stainless Steel
O-Ring:	<ul style="list-style-type: none"> <li>• Nitrile (32PLCK &amp; 68PLCK)</li> <li>• EPDM (VC)</li> </ul>



These in-line check valves allows air to pass in one direction while blocking flow in the other direction. Their extreme compactness and light weight make them suitable as a safety item in compressed air circuits. The body of the fitting contains an arrow to indicate the direction of flow.


Nomenclature	
Example: W68PLCK-4-2	Attribute:
W	White thread sealant
68	Tube x Pipe
PL	Prestolok
CK	Check Valve
4	1/4 Tube O.D.
2	1/8 Pipe thread

Nomenclature	
Example: A4VC4-MG	Attribute:
A	Acetal
4	1/4 Tube O.D.
VC	Valve, Check
4	1/4 Tube O.D.
MG	Metal gripping ring

Applicable Tube	
Tube O.D.	<ul style="list-style-type: none"> <li>• PLCK: 5/32, 1/4, 5/16, 3/8</li> <li>• VC: 1/4, 5/16, 3/8</li> </ul>
Tube O.D. (mm)	PLCK: 4, 6, 8, 10, 12


Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	34°F to 150°F
Cracking Pressure:	<ul style="list-style-type: none"> <li>• PLCK: 7 PSI</li> <li>• VC: 1/3 PSI</li> </ul>
Working Fluid:	Compressed air

Product Index	
Compact Flow Controls	
Miniature Flow Controls	
Swivel Flow Controls	
Plug-In Flow Controls	
In-Line Flow Controls	
Metal Flow Controls	
Check Valves	
Blocking Valves	
Threshold Sensors	




**32PLCK In-Line Check Valve**

Part No.	Tube Size (In)	L
32PLCK-5/32	5/32	1.52
32PLCK-4	1/4	1.61
32PLCK-5	5/16	2.03
32PLCK-6	3/8	2.50




**32PLCK In-Line Check Valve**

Part No.	Tube Size (mm)	L
32PLCK-4M	4	38.5
32PLCK-6M	6	41.0
32PLCK-8M	8	51.5
32PLCK-10M	10	63.5
32PLCK-12M	12	66.5




**W68PLCK Male Check Valve**

Part No.	Tube Size (in)	NPT / UNF	Hex (mm)	H
68PLCK-5/32-0	5/32	10-32	9	1.26
W68PLCK-5/32-2	5/32	1/8	16	1.12
W68PLCK-4-2	1/4	1/8	19	1.42
W68PLCK-4-4	1/4	1/4	19	1.42
W68PLCK-6-4	3/8	1/4	23	1.65
W68PLCK-6-6	3/8	3/8	23	1.65




**W68PLCKI Male Check Valve Meter In**

Part No.	Tube Size (In)	NPT / UNF	Hex (mm)	H
68PLCKI-5/32-0	5/32	10-32	9	1.26
W68PLCKI-5/32-2	5/32	1/8	16	1.12
W68PLCKI-4-2	1/4	1/8	19	1.42
W68PLCKI-4-4	1/4	1/4	19	1.42
W68PLCKI-6-4	3/8	1/4	23	1.65
W68PLCKI-6-6	3/8	3/8	23	1.65




**68PLCK Male Check Valve Meter Out - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H
68PLCK-4M-M5	4	M5x0.8	9	32.0
68PLCK-4M-2G	4	1/8	16	28.5
68PLCK-6M-2G	6	1/8	16	30.5
68PLCK-6M-4G	6	1/4	16	30.5
68PLCK-8M-2G	8	1/8	19	36.0
68PLCK-8M-4G	8	1/4	19	36.0



**68PLCKI Male Check Valve Meter In - BSPP**


Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H
68PLCKI-4M-M5	4	M5x0.8	9	32.0
68PLCKI-6M-2G	6	1/8	16	30.5
68PLCKI-8M-2G	8	1/8	19	36.0
68PLCKI-8M-4G	8	1/4	19	36.0
68PLCKI-10M-6G	10	3/8	23	42.0
68PLCKI-12M-6G	12	3/8	23	42.0
68PLCKI-12M-8G	12	1/2	23	44.0



**VC - Check Valve**


Part No.	Tube Size (In)	L	O.D.
A4VC4-MG	1/4	2.00	.66
A5VC5-MG	5/16	2.10	.70
A6VC6-MG	3/8	2.15	.80

<b>C</b>	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-In Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors

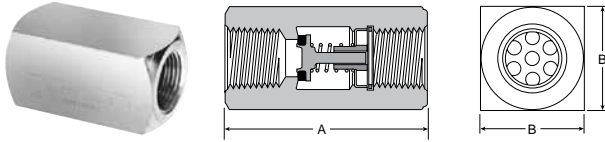


**339 Check Valve**

Part No.	Port Size	A	B
00339 3000	1/8"	1.22	0.56
00339 3001	1/4"	1.34	0.69
00339 3002	3/8"	2.00	0.88
00339 3003	1/2"	2.56	1.19
00339 3004	3/4"	2.66	1.38

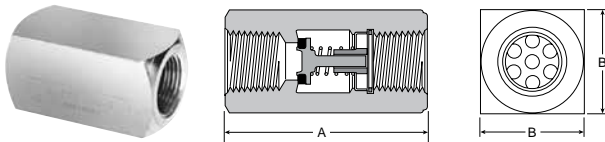

**339 Check Valve - BSPP**

Part No.	Port Size	A	B
00339G3000	1/8"	1.22	0.56
00339G3001	1/4"	1.34	0.69

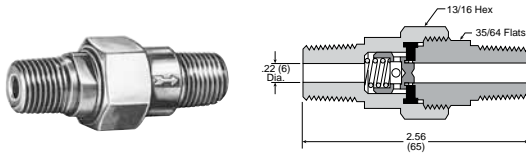


**3047 Check Valve**

Model Number	Pipe Thread
03047 0099	1/4"

- C
- Product Index
- Compact Flow Controls
- Miniature Flow Controls
- Swivel Flow Controls
- Plug-in Flow Controls
- In-Line Flow Controls
- Metal Flow Controls
- Check Valves
- Blocking Valves
- Threshold Sensors

**Notes**

---

	
Product Index	
Compact Flow Controls	
Miniature Flow Controls	
Swivel Flow Controls	
Plug-In Flow Controls	
In-Line Flow Controls	
Metal Flow Controls	
Check Valves	
Blocking Valves	
Threshold Sensors	

**Features**

Materials of Construction	
Body:	Treated Brass
Gripping Ring:	Stainless Steel
Seals, Diaphragm:	Nitrile

Nomenclature	
Example: FC601-4-2	Attribute:
FC	Flow control
6	Blocking
0	Brass body
1	Tube x pipe
4	1/4 Tube O.D.
2	1/8 Pipe thread


Applicable Tube	
Tube O.D.	1/8, 5/32, 1/4, 3/8
Tube O.D. (mm)	4, 6, 8, 10, 12, 14

Specifications	
Pressure Range:	15 to 145 PSI
Temperature Ranges:	-4° to 160°F
Number of Cycles	> 10 million at 68°F and 1 Hz
Leak Rate:	< 3.2 CCM
Working Fluid:	Compressed air




Blocking valves prevents damage to work and equipment in the event of a loss of pressure. Blocking valves which are mounted in pairs on a cylinder lock the piston by simultaneously cutting off the supply and exhaust. Functional locks are more precise and rapid when blocking valves are located on the cylinder: the volume of air in the pipework no longer needs to be taken into consideration.

C	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-in Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors

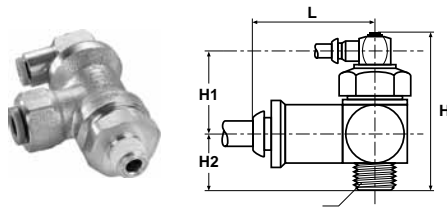


**FC601 Push-to-Connect Lock-Out Valves**

Part No.	Tube Size (in)	NPT	Hex (mm)	H	H1	H2	L
FC601-4-2	1/4	1/8	21	2.03	1.24	0.79	1.10
FC601-4-4	1/4	1/4	21	2.03	1.24	0.79	1.10
FC601-6-6	3/8	3/8	24	2.19	1.14	1.04	1.38
FC601-8-8	1/2	1/2	24	2.19	1.14	1.04	1.69

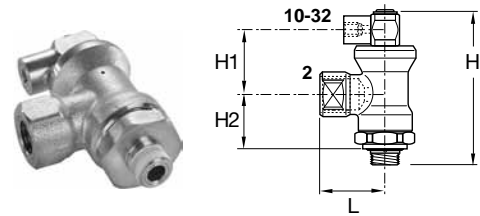


**FC602 Threaded Port Lock-Out Valves**

Part No.	1 NPT	2 NPT	Hex (mm)	H	H1	H2	L
FC602-2	1/4	1/8	21	2.03	1.24	0.79	1.04
FC602-4	1/4	1/4	21	2.03	1.24	0.79	1.04
FC602-6	3/8	3/8	24	2.19	1.14	1.04	1.34
FC602-8	1/2	1/2	24	2.19	1.14	1.04	1.57

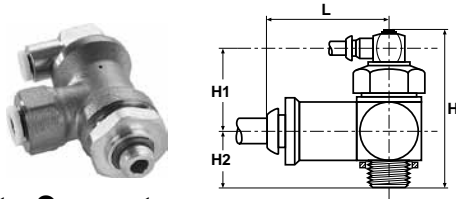

**FC601 Push-to-Connect Lock-Out Valve - BSPP**

Part No.	Tube Size (mm)	BSPP	Hex 1 (mm)	H	H1	H2	L
FC601-6M-2G	6	1/8	21	53	24.5	21.0	28.0
FC601-6M-4G	6	1/4	21	53	24.5	21.0	28.0
FC601-8M-4G	8	1/4	21	53	24.5	21.0	28.0
FC601-8M-6G	8	3/8	24	56	25.0	23.0	34.5
FC601-10M-6G	10	3/8	24	56	25.0	23.0	35.0
FC601-12M-8G	12	1/2	24	56	25.0	23.0	37.5

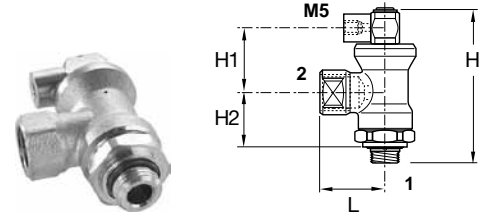

**FC608 Threaded Port Lock-Out Valve - BSPP**

Part No.	BSPP 1	BSPP 2	Hex 1 (mm)	H	H1	H2	L
FC608-4G-2G	1/8	1/4	21	53	24.5	21.0	28.0
FC608-4G-4G	1/4	1/4	21	53	24.5	21.0	28.0
FC608-6G-6G	3/8	3/8	24	56	25.0	23.0	34.0
FC608-8G-8G	1/2	1/2	24	56	25.0	23.0	41.0

**C**

Product Index

Compact Flow Controls

Miniature Flow Controls

Swivel Flow Controls

Plug-In Flow Controls

In-Line Flow Controls

Metal Flow Controls

Check Valves

Blocking Valves

Threshold Sensors

## Integrated Fittings Threshold Sensor

### Features

Specifications: Models PSBJ, PSPJ	
Working Temperature:	5° to 140°F
Working Pressure:	45 to 115 PSI
Breaking Pressure:	8.5 PSI
Response Time:	3 Ms

Specifications: Model PSPE	
Working Pressure:	45 to 115 PSI
Breaking Pressure:	7 PSI
Current Rating:	5A / 250VAC - 5W / 48VDC

UL Listed Component	
Reset Pressure:	10 PSI




The sensor fitting detects the absence of pressure and translates it to a high pressure pneumatic output. When used to monitor the decaying or exhausting side of a pneumatic cylinder's piston, it emits a positive output. When the cylinder comes to the end of its stroke, wherever that may be, the signal emitted from the sensor can then be used to pilot the next step.

	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-in Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors




**Part Numbers**

**Integrated Fittings  
Threshold Sensor**

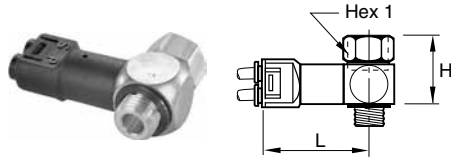


**PSBJ731 Pneumatic Threshold Sensor - 5/32 Pilot**

Part No.	NPT / UNF	Hex (mm)	H	L
PSBJ731-0	10-32	5/16	0.62	1.70
PSBJ731-2	1/8	9/16	0.90	1.74
PSBJ731-4	1/4	5/8	1.09	1.81
PSBJ731-6	3/8	7/8	1.13	1.91
PSBJ731-8	1/2	1	1.17	2.05

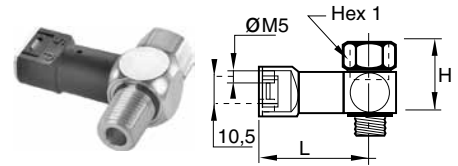


**PSBJ708 Pneumatic Threshold Sensor - M5 Pilot**

Part No.	BSPP	Hex 1 (mm)	H	L
PSBJ708-2G	1/8	14	23	40.5
PSBJ708-4G	1/4	17	28	42.5

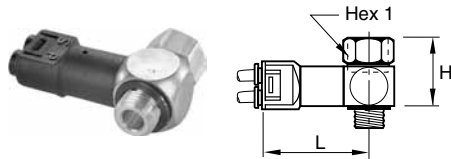


**PSBJ731 Pneumatic Threshold Sensor - 4mm Pilot**

Part No.	BSPP	Hex 1 (mm)	H	L
PSBJ731-M5	M5x0.8	8	16	43.5
PSBJ731-2G	1/8	14	23	44.5
PSBJ731-4G	1/4	17	28	46.5
PSBJ731-6G	3/8	22	29	49.0
PSBJ731-8G	1/2	27	30	52.5

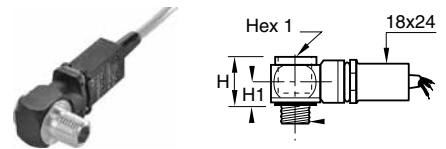

**PSPE731 Pneumatic / Electric Threshold Sensor - BSPP**

Part No.	BSPP	Hex 1 (mm)	H	H1	L
PSPE731-M5	M5x0.8	8	20	10	49
PSPE731-2G	1/8	6	20	10	52
PSPE731-4G	1/4	8	20	10	54
PSPE731-6G	3/8	10	22	12	57
PSPE731-8G	1/2	12	26	14	58

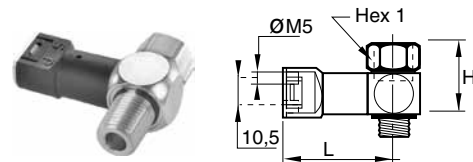


**PSPJ731 Pneumatic Threshold Sensor - 10-32 Pilot**

Part No.	NPT	Hex 1 (mm)	H	L
PSPJ731-2	1/8	9/16	0.90	1.58
PSPJ731-4	1/4	5/8	1.09	1.66
PSPJ731-6	3/8	7/8	1.13	1.76

<b>C</b>	Product Index
	Compact Flow Controls
	Miniature Flow Controls
	Swivel Flow Controls
	Plug-In Flow Controls
	In-Line Flow Controls
	Metal Flow Controls
	Check Valves
	Blocking Valves
	Threshold Sensors

Notes

---


Product Index
Compact Flow Controls
Miniature Flow Controls
Swivel Flow Controls
Plug-In Flow Controls
In-Line Flow Controls
Metal Flow Controls
Check Valves
Blocking Valves
Threshold Sensors

# Accessories

## Section D



### D

Tanks & Air Chucks
Mufflers & Silencers
Relief & Exhaust Valves
Pressure Switches
AirGuard Protection
Drain Valves
Safety Blow Guns


Tank Valves & Air Chucks.....	D2	Automatic Drip Leg Drain & Relief Valve.....	D8
EM Series Exhaust Mufflers.....	D3	Relief Valves - Diaphragm Type.....	D9
Muffler / Flow Controls .....	D3	Shuttle Valves & Quick Exhaust .....	D10-D12
Breather Vents.....	D4	Pressure Switch .....	D13
ES Series Silencer .....	D4	Drain Valves.....	D14-D15
ASN Air Line Silencer.....	D5	Safety Blow Guns.....	D16-D17
P6M Air Line Silencer .....	D6		
Muffler-Reclassifier ECS .....	D7		

**Tank Valves**

For tanks, steel barrels, compressors and other pneumatic containers where a dependable automatic air valve is needed. Equipped with standard valve core and sealing cap. Maximum operating pressure is 185 PSIG. Temperature range is -40°F to 220°F.


**Model No. 09166 0060**

Has a 1/8" pipe thread at bottom for minimum protrusion. N/P finish, dome shaped cap. Packed 25 to a box.

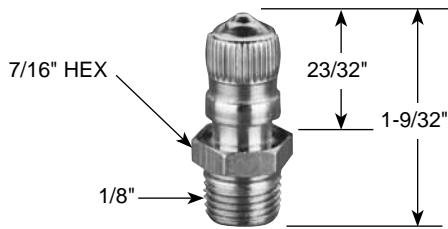


**Model No. 00645 0060**

A 1/8" pipe thread at bottom permits maximum protrusion. N/P finish, screwdriver type cap. Packed 25 to a box.

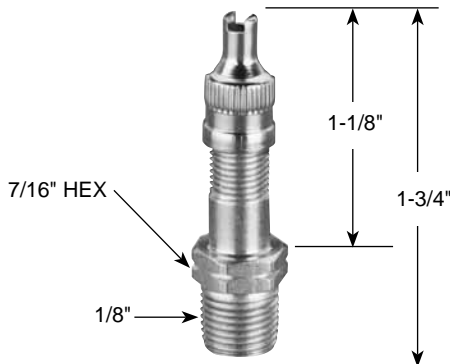

**Model No. 01468 0006**

Has a 1/8" pipe thread part way up the stem which allows for minimum protrusion. N/P finish, has screwdriver type cap. Packed 25 to a box.

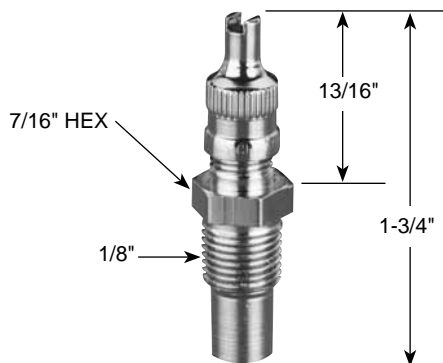

**Air Chucks**

For regular airlines.

**Model No. 05499 0000**

Ball-foot air chuck, 1/4" female port. Packed 10 to a box.



**Model No. 06739 0000**

Ball-foot air chuck with clip. Fits standard valve mouth. Saves holding on by hand. Has 1/4" port for connecting to hose. Packed 10 to a box.



**D**

Tanks & Air Chucks

Mufflers & Silencers

Relief & Exhaust Valves


Pressure Switches

AirGuard Protection

Drain Valves

Safety Blow Guns

**EM Series – Sintered Bronze  
Muffler / Filters**

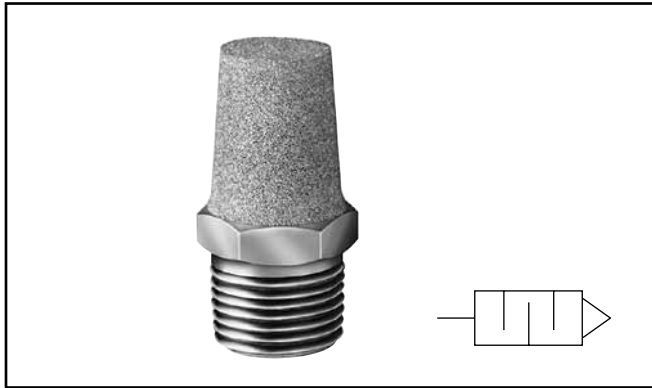

**General Description**

Muffler / filters effectively reduce air exhaust noises to an industry accepted level with minimum flow restriction. They protect valves, impact wrenches, screw drivers and other air tools by preventing dirt and other foreign matter from entering the system. Non-corrosive. Can be cleaned with many common solvents.

**Specifications**

**Maximum Operating Pressure**.....250 PSIG (Air)

**Operating Temperature** ..... 0° to 300°F\*

\* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
EMM5	M5	.75	5/16"
EM12	1/8"	1.00	7/16"
EM25	1/4"	1.32	9/16"
EM37	3/8"	1.54	11/16"
EM50	1/2"	1.85	7/8"
EM75	3/4"	2.29	1-1/16"
EM100	1"	2.91	1-5/16"
EM125	1-1/4"	3.25	1-11/16"
EM150	1-1/2"	3.69	2"

**Muffler / Flow Controls**



**General Description**

Muffler / flow controls provide an acceptable exhaust noise level and effectively meter exhaust. Installed in valve exhaust ports, they control cylinder piston speeds throughout a wide range. The adjusting screw cannot be accidentally blown out, can be locked to maintain setting. Brass and bronze construction. Clean with commonly used solvents.

**Specifications**

**Maximum Operating Pressure**.....250 PSIG (Air)

**Operating Temperature** ..... 0° to 300°F\*


\* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
04502 0002	1/8"	1.15	9/16"
04504 0004	1/4"	1.42	1/2"
04506 0060	3/8"	1.49	11/16"
04508 0080	1/2"	1.77	7/8"
04512 0012	3/4"	1.98	1-1/16"
04516 0016	1"	2.15	1-5/16"

**D**

- Tanks & Air Chucks
- Mufflers & Silencers
- Relief & Exhaust Valves
- Pressure Switches
- AirGuard Protection
- Drain Valves
- Safety Blow Guns

## Breather Vents

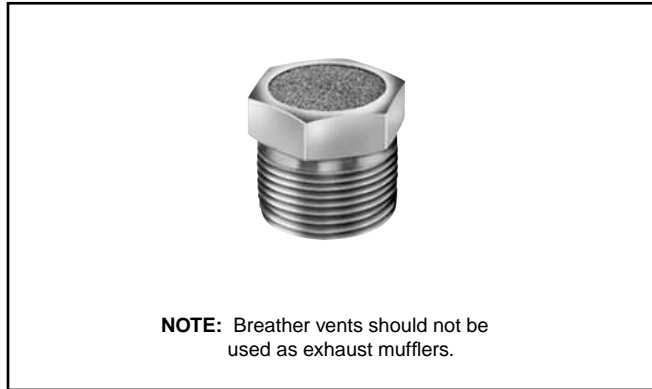

**NOTE:** Breather vents should not be used as exhaust mufflers.

### General Description

These low silhouette versions of the muffler / filter are useful where space is a problem and / or to prevent contamination. Use for vacuum relief or pressure equalization in gear boxes, oil tanks, reservoirs, etc. Non-corrosive.

## Specifications


**Maximum Operating Pressure**..... 150 PSIG (Air)

**Operating Temperature** ..... 0° to 300°F\*

\* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Number	Pipe Thread	Overall Length	Hex Size
04702 0002	1/8"	0.44	7/16"
04704 0004	1/4"	0.63	9/16"
04706 0006	3/8"	0.75	11/16"
04708 0008	1/2"	0.88	7/8"
04712 0012	3/4"	1.00	1-1/16"
04716 0016	1"	1.31	1-5/16"
04720 0020	1-1/4"	1.41	1-11/16"
04724 0024	1-1/2"	1.50	2"

## ES Series – Silencer

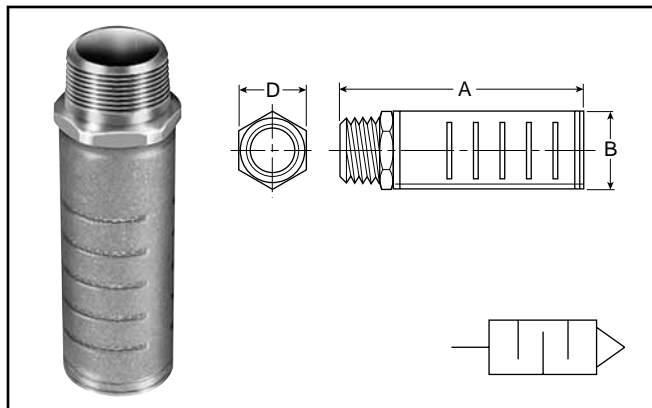

### General Description

The silencer is designed to give superior performance in noise control with a minimum effect on air efficiency. "Trimline" design allows location in the tightest places without extra plumbing and fittings. Fits directly into the exhaust port of more than 90% of present commercial valves. Slotted body permits rapid discharge of air without undesirable back pressure. Unique nylon screen element resists dirt buildup or clogging.

### Specifications



**Maximum Operating Pressure**.....250 PSIG (Air)

**Operating Temperature** ..... 0° to 300°F\*

\* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Model Numbers		Pipe Thread	Flow SCFM @ 100 PSIG Inlet	Dimensions		
NPTF	BSPT (R)			A	B	D
ES12MC	ESB12MC	1/8"	115	1.85	0.81	0.63
ES25MC	ESB25MC	1/4"	129	1.85	0.81	0.63
ES37MC	ESB37MC	3/8"	219	3.31	1.26	1.00
ES50MC	ESB50MC	1/2"	549	3.31	1.26	1.00
ES75MC	ESB75MC	3/4"	893	4.56	2.01	1.62
ES100MC	ESB100MC	1"	1,013	4.56	2.01	1.62
ES125MC	ESB125MC	1-1/4"	1,486	5.69	2.88	—
ES150MC	ESB150MC	1-1/2"	1,580	5.69	2.88	—

**D**  
 Tanks & Air Chucks  
 Mufflers & Silencers  
 Relief & Exhaust Valves  
 Pressure Switches  
 AirGuard Protection  
 Drain Valves  
 Safety Blow Guns

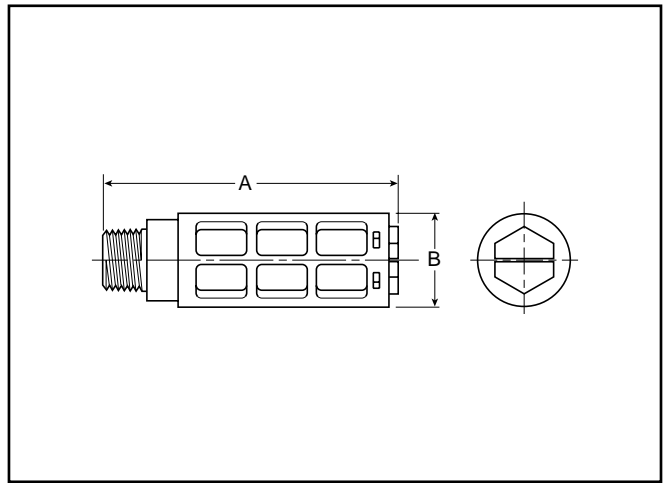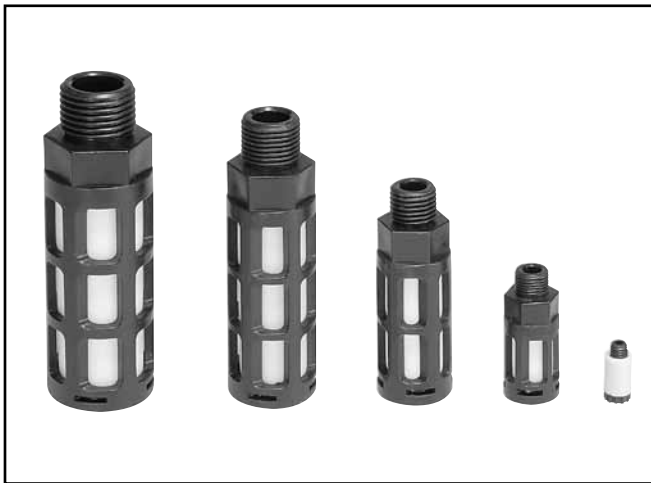

**Features**

- Compact
- Lightweight
- Easy to Install
- Excellent Noise Reduction
- Protects Components from Contamination
- NPT and BSPT Threads Available

**Application**

The plastic silencer is designed to give excellent noise reduction with a minimum effect on air efficiency. The "Trimline" design allows for locating the silencer in the tightest places without extra plumbing or fittings. Fits directly into the exhaust port of most commercial valves. Open surface area of element allows for rapid discharge of air without undesirable back pressure.

Part Number		Thread Size	A (mm)	B (mm)	Maximum Flow (SCFM) 100 PSIG Inlet	Sound Pressure Level (dBA)	
NPT	BSPT					20 PSIG Inlet	100 PSIG Inlet
<b>AS-5</b>		M5	0.43 (11)	0.32 (8)	15	69	79
<b>ASN-6</b>	<b>AS-6</b>	1/8"	1.57 (40)	0.63 (16)	51	69	81
<b>ASN-8</b>	<b>AS-8</b>	1/4"	2.56 (65)	0.83 (21)	124	67	84
<b>ASN-10</b>	<b>AS-10</b>	3/8"	3.35 (85)	0.98 (25)	247	83	98
<b>ASN-15</b>	<b>AS-15</b>	1/2"	3.74 (95)	1.18 (30)	370	69	96

**Specifications**

**Pressure Rating**.....0 to 150 PSIG  
 (0 to 10 bar, 0 to 1034 kPa)

**Temperature Rating** ..... 14°F to 140°F (-10°C to 60°C)



**Body** .....Acetal (Plastic)

**Element** ..... Polyethylene

**D**

- Tanks & Air Chucks
- Mufflers & Silencers
- Relief & Exhaust Valves
- Pressure Switches
- AirGuard Protection
- Drain Valves
- Safety Blow Guns



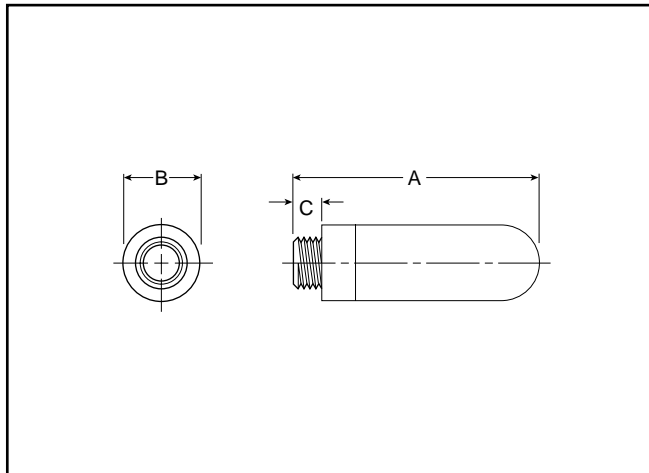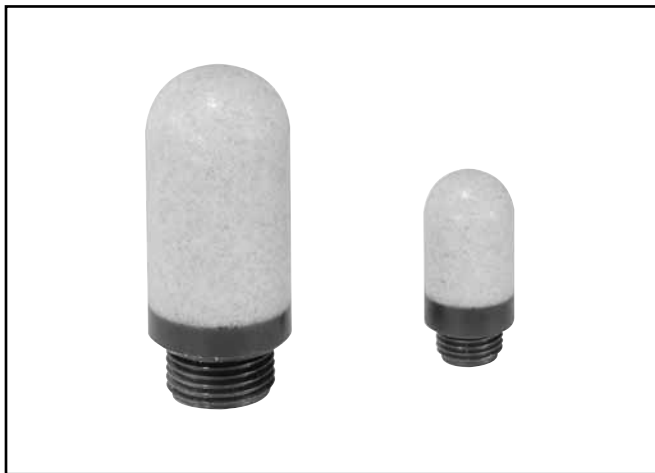

**D**

**Features**

- All Plastic Ultra Light Weight Versions
- High Noise Level Reduction
- Low Back Pressure Generation

**Application**

The plastic silencer is designed to give excellent noise reduction with a minimum effect on air efficiency. The "Trimline" design allows for locating the silencer in the tightest places without extra plumbing or fittings. Fits directly into the exhaust port of most commercial valves. Open surface area of element allows for rapid discharge of air without undesirable back pressure.

Part Number	Port Thread	A	Diameter B	C	Weight (grams)
<b>P6M-PAC5</b>	M5	0.91 (23)	0.26 (6,5)	0.16 (4)	0.01
<b>P6M-PAB1</b>	G1/8	1.14 (29)	0.55 (14)	0.24 (6)	0.02
<b>P6M-PAB2</b>	G1/4	1.34 (34)	0.67 (17)	0.24 (6)	0.04
<b>P6M-PAB3</b>	G3/8	2.36 (60)	0.98 (25)	0.35 (9)	0.06
<b>P6M-PAB4</b>	G1/2	2.52 (64)	0.98 (25)	0.43 (11)	0.10
<b>P6M-PAB6</b>	G3/4	5.51 (140)	1.50 (38)	0.55 (14)	0.50
<b>P6M-PAB8</b>	G1	6.30 (160)	1.89 (48)	0.79 (20)	0.62

**Specifications**


**Pressure Rating**..... 0 to 246 PSIG  
 (0 to 17 bar, 0 to 1700 kPa)

**Temperature Rating**

**Plastic** ..... 14°F to 176 °F (-10°C to 80°C)  
**Metal**..... 14°F to 165 °F (-10°C to 74°C)

**Efficiency** .....92%

Tanks & Air Chucks  
 Mufflers & Silencers  
 Relief & Exhaust Valves  
 Pressure Switches  
 AirGuard Protection  
 Drain Valves  
 Safety Blow Guns

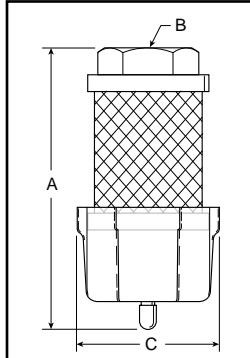

**Dimensions:**

Model	A	B	C
ECS3	5.30 (135 mm)	1/2" NPT	2.57 (65 mm)
ECS5	7.30 (185 mm)	1" NPT	2.57 (65 mm)

**Operation**


Compressor oils and lubricating oils are exhausted from valves, cylinders and air motors into the ECS. Oil aerosols are "coalesced" into larger droplets and gravity pulls them into the attached drain sump. The sump can then be drained manually or by using a 1/4" ID plastic tube drain. The air flowing into the ECS is also muffled or silenced as it enters the inside of the ECS and passes through the filter media into the atmosphere.

**Proven Technology**

The ECS units are constructed from the same materials that go into our oil removal coalescing filter elements.

The seamless design insures media uniformity and strength. This proven technology provides high coalescing efficiency with low pressure drop.

The filter media is supported by cylindrical perforated steel retainers both inside and out. These retainers, fully plated for excellent corrosion resistance, give the ECS units high rupture strength in either flow direction. These filters can also be used as high efficiency inlet or bypass filters for vacuum pumps, or breather elements to protect the air above critical process liquids.

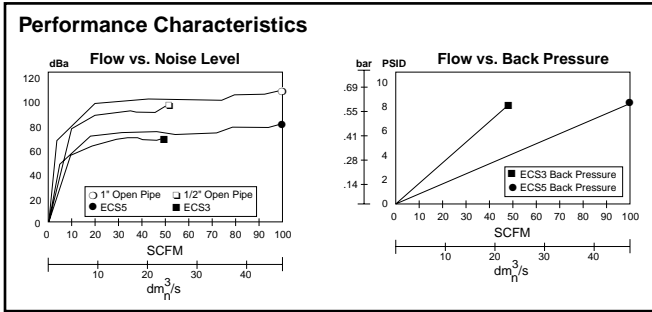

**Features**

The ECS (Muffler-Reclassifier) eliminates unwanted oil mist and reduces exhaust noise from pneumatic valves, cylinders and air motors.

- 99.97% Oil Removal Efficiencies
- 25 dBA Noise Attenuation
- 1/2" NPT and 1" NPT
- Disposable Units
- Continuous or Plugged Drain Option
- Metal Retained Construction
- Fast Exhaust Time

**Improve Overall Plant Environment**

Exhaust oil mist and noise pollution have a direct impact on worker productivity.

Oil aerosol mist from lubricators and compressors is pervasive and enters the industrial plant environment through the exhaust ports of valves, cylinders and air motors. This rapidly expanding exhaust also produces sudden and excessive noise.

The ECS (Muffler-Reclassifier) is 99.97% efficient at removing the oil aerosols. The ECS also acts as a silencer to lower the dBA levels below O.S.H.A. requirements.

The result is a cleaner, quieter environment which equates to greater work productivity and safety.

**ECS3 / ECS5**


The ECS solves two problems inherent in compressed air exhaust from valves, cylinders and air motors - oil mist removal and noise abatement.

The ECS will improve your industrial plant environment, thereby improving worker productivity.

**Specifications**

**Maximum Operating Temperature** ..... 125°F (52°C)  
**Maximum Line Pressure**..... 100 PSIG (6.8 bar)


**Ordering Information**

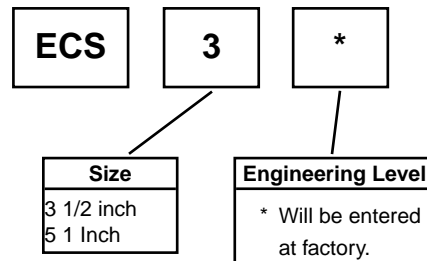

**D**

Tanks & Air Chucks
Mufflers & Silencers
Relief & Exhaust Valves
Pressure Switches
Air Guard Protection
Drain Valves
Safety Blow Guns

## Automatic Drip Leg Drain

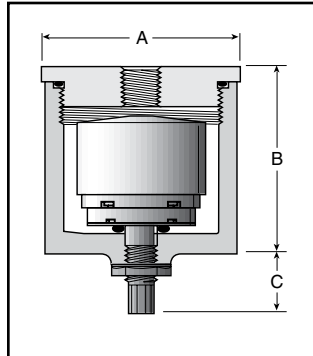

A	B	C
2.50	2.37	0.87
64 mm	60 mm	22 mm

### Features

- Auto Drain Ported 1/8" to Pipe Away Liquid.
- Drain has Manual Override
- Easily Serviced without Tool
- 20-250 PSIG Range
- Compact Size

### Specifications



<b>Housing &amp; Cap</b> .....	Aluminum
<b>Port Threads</b> .....	1/4" - 1/2" Top 1/8" Drain
<b>Pressure and Temperature Ratings:</b>	
<b>Metal Bowl</b> .....	20 to 250 PSIG (0 to 17.2 bar) 32°F to 175°F (0°C to 80°C)
<b>Seals</b> .....	Buna N

### Ordering Information

Consists of Drip Leg Drain Housing WITH Auto Drain.

Model No.	Size
06D1NA	1/4"
06D3NA	1/2"

## Relief Valve

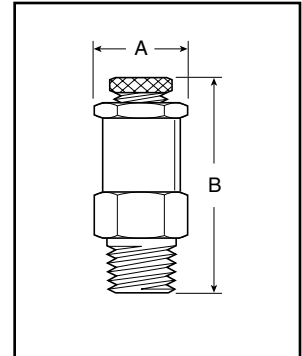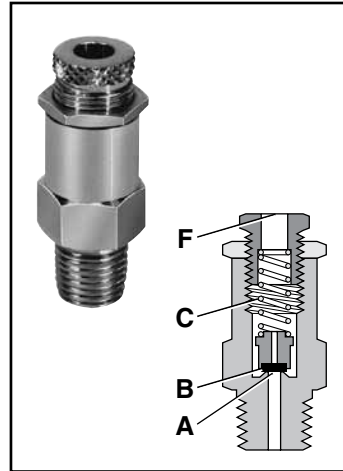

A	B
0.75 Hex	1.88 - 2.25
19 mm	47.8 - 57.2 mm

### Features

- Large Relief Capacity (70.39 SCFM @ 150 PSI when fully opened) in a Compact Size
- Lightweight Aluminum Construction with Resilient Seat

### Application

The RV01A1N Pop Off Relief Valve is designed to protect against excessive pressure buildup in a pneumatic circuit or system.

### Operation\*

With the relief valve mounted in a reservoir or system, the force of system pressure at (A) is offset by the force of spring (C) acting on poppet seat (B). At pressures lower than the setting, the poppet seat (B) is held against the body at (A) effecting a seal. As pressure approaches set point, the poppet begins to vent until set point is reached, at which time the poppet seat (B) lifts off the body at (A) allowing the excess pressure to vent to atmosphere at (F). When the excess pressure has been vented, the spring (C) acts on the poppet seat (B) forcing it to seat on the body at (A), sealing off the flow of air.

### Specification

<b>Body &amp; Adjusting Screw</b> .....	Aluminum
<b>Locking Nut</b> .....	Steel
<b>Seat</b> .....	Nitrile
<b>Spring</b> .....	Steel
<b>Poppet</b> .....	Plastic
<b>Operating Temperature</b> † .....	0°F to 200°F (-17°C to 93°C)
<b>Port Threads</b> .....	1/4 Inch Male
<b>Relief Range</b> .....	10 to 200 PSIG (.7 to 14 bar) with standard spring.

\* Ref: 1RV100B Installation & Service Instructions


† Only if using dry air for temperatures below 32°F (0°C)

### Ordering Information

<b>RV01A1N</b>	<b>XXX</b>	
	10 -200 PSI	<b>Blank BUNA</b> V Fluorocarbon

**D**  
 Tanks & Air Chucks  
 Mufflers & Silencers  
 Relief & Exhaust Valves  
 Pressure Switches  
 AirGuard Protection  
 Drain Valves  
 Safety Blow Guns

## 130 Relief Valve

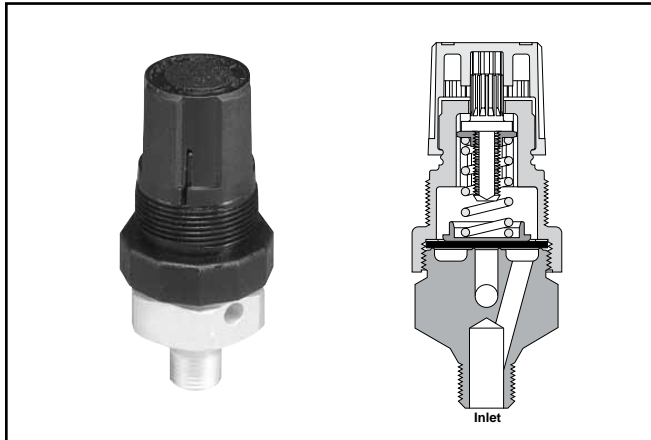

### Features

- Compact, Sensitive Diaphragm-type Relief Valve
- Push-pull, Locking Knob
- Knob and Top Work the Same as a Miniature Regulator
- 130 has Lightweight Aluminum Construction
- 134 has a brass body, captured exhaust and is an Inline Type with 3 Inlet Ports and 1 Outlet Port

### Applications

- Designed to Protect Against Excessive Pressure Buildup in a Pneumatic Circuit or System
- For Use where Gradual Proportional Relief is Required

### Operation


- Turn relief valve knob clockwise for maximum pressure.
- Set pressure going into relief valve at desired pressure.
- Turn relief valve knob counter-clockwise until exhaust starts to bleed.
- Turn relief valve knob clockwise until exhaust stops bleeding. Push to lock knob.

### Ordering Information


Relief Valve	Spring Range			
	0-15 PSIG	0-25 PSIG	0-50 PSIG	0-100 PSIG
<b>130</b>	130-02AA	130-02A	130-02B	130-02C
	130-02AAP*	130-02AP*	130-02BP*	130-02CP*
<b>134</b>	134-02AA	134-02A	134-02B	134-02C
	134-02AAP*	134-02AP*	134-02BP*	134-02CP*

\* Panel mount nut included.

## 134 Relief Valve

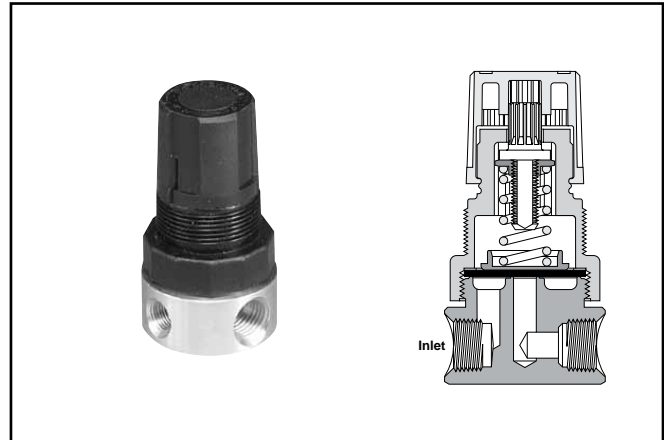

### Dimensions

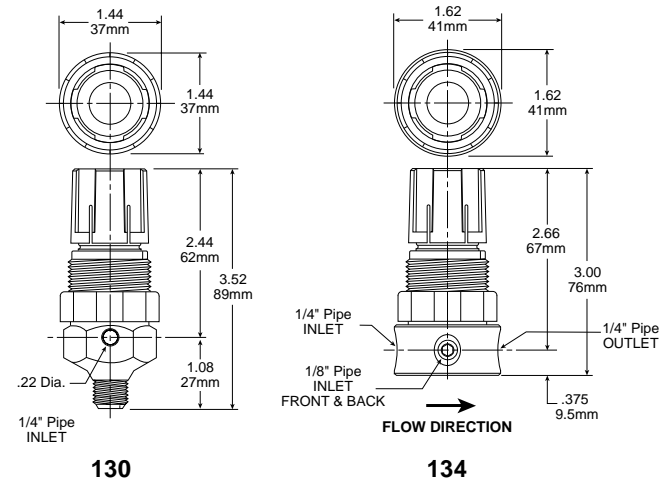

### Relief Valve Kits

- Bonnet Assembly Kit .....PCKR364Y
- Panel Mount Nut .....PR05X51

### Specifications

- Relief Range .....0 to 100 PSIG (0 to 6.9 bar)
- Maximum Inlet Pressure .....300 PSIG (20.7 bar)
- Operating Temperature ..... 40°F to 120°F (4°C to 49°C)
- Port Threads:
- 130 ..... 1/4" Pipe Male Only
- 134 ..... Inlet Port – Two 1/8" & One 1/4" Pipe  
Outlet Port – 1/4" Pipe

### Materials of Construction

- Adjusting Knob ..... Polypropylene
- Adjusting Screw .....Zinc-plated Steel
- Body ..... Aluminum (130); Brass (134)
- Diaphragm / Disc .....Buna-N
- Nut .....Chromated Steel
- Spring Cage ..... Acetal
- Spring .....Zinc-plated Steel

**D**

Tanks & Air Chucks

Mufflers & Silencers



Relief & Exhaust Valves

Pressure Protection Switches

AirGuard Protection

Drain Valves

Safety Blow Guns

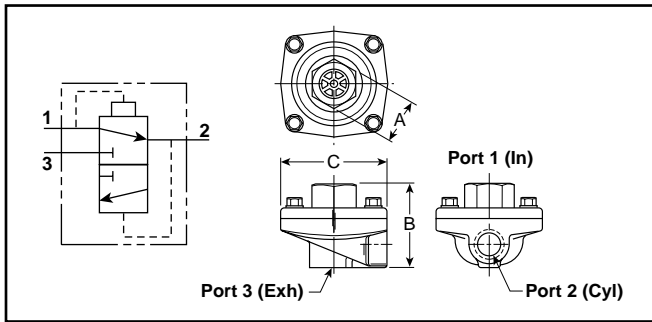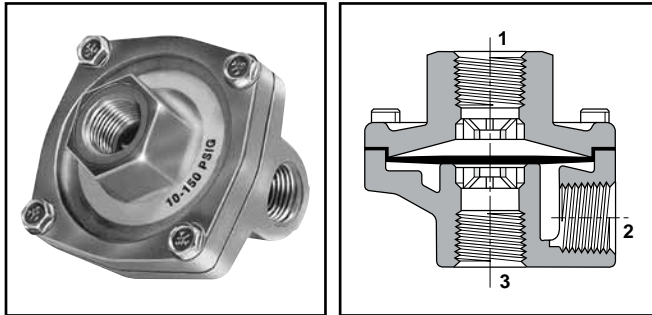

**Valve Specifications**

**Operating Pressure (Air)**

**Maximum:**

150 PSIG  
 200 PSIG for Model No. 0R37TB (PTFE diaphragm)

**Minimum:**

3 PSIG  
 50 PSIG for Model No. 0R37TB (PTFE diaphragm)

**Operating Temperature:**

Urethane: 0°F to 180°F\* (-18°C to 80°C)  
 Nitrile: 0°F to 180°F\* (-18°C to 80°C)  
 Fluorocarbon: 0°F to 400°F\* (-18°C to 205°C)  
 PTFE: 0°F to 500°F\* (-18°C to 260°C)

\* Ambient temperatures below freezing require moisture-free air.  
 Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures.  
 Pneumatic valves should be used with filtered and lubricated air.

**Component Materials**


**Body Material**..... Die cast aluminum  
**Static Seals**.....Nitrile standard with urethane (Others see below)  
**Diaphragm** ..... Standard – Urethane  
 Optional – Fluorocarbon, PTFE, or Nitrile (Depending on size)

**Mounting Bracket Kit –**

**No. 03640 8100**

(Including body screws)

For “0R12” and “0R25” sizes with 7/8” “A” Dimension.



**General Information**

Quick exhaust valves provide rapid exhaust of control air when placed between control valve and actuator. They can also be used as shuttle valves. Diaphragm materials are available in urethane, Nitrile, Fluorocarbon, and PTFE to meet a wide variety of operating conditions.

**Model Selection, Performance Data and Dimensions**

Port			Flow (SCFM) <sup>†</sup>	Model Number		A	B	C	Service Kit No.
1	2	3		NPTF	BSPP “G”				
<b>STANDARD URETHANE DIAPHRAGMS (Nitrile static seals)</b>									
1/4"	1/4"	3/8"	150	<b>0R25NB</b>	0RB25NB	1" Hex	2.06	2.44	03340 0105
	3/8"	3/8"	240	<b>0R25PB</b>	—	1" Hex	2.06	2.44	03340 0105
3/8"	3/8"	3/8"	240	<b>0R37B</b>	0RB37B	1" Hex	2.06	2.44	03340 0105
1/2"	1/2"	1/2"	450	<b>0R50B</b>	0RB50B	1-1/2" Hex	2.88	3.38	03475 0109
3/4"	3/4"	3/4"	550	<b>0R75B</b>	0RB75B	1-1/2" Hex	2.88	3.38	03475 0109
<b>NITRILE DIAPHRAGMS (Nitrile static seals)</b>									
1/8"	1/8"	1/8"	70	<b>0R12B</b>	0RB12B	7/8" Sq.	1.75	1.88	03640 8000
	1/8"	1/4"	70	<b>0R12NB</b>	0RB12NB	7/8" Sq.	1.75	1.88	03640 8000
1/4"	1/4"	1/4"	90	<b>0R25B</b>	0RB25B	7/8" Sq.	1.75	1.88	03640 8000
	1/4"	3/8"	90	<b>0R25NFB</b>	0RB25NFB	7/8" Sq.	1.75	1.88	03340 8000
3/8"	3/8"	3/8"	240	<b>0R37FB</b>	0RB37FB	1" Hex	2.06	2.44	03340 8000
3/4"	3/4"	3/4"	550	<b>0R75FB</b>	0RB75FB	1-1/2" Hex	2.88	3.38	03475 9000
<b>FLUOROCARBON DIAPHRAGMS for extended temperature operation (Fluorocarbon static seals)</b>									
1/8"	1/8"	1/8"	70	<b>0R12VB</b>	0RB12VB	7/8" Sq.	1.75	1.88	03650 8000
	1/8"	1/4"	70	<b>0R12NVB</b>	0RB12NVB	7/8" Sq.	1.75	1.88	03650 8000
1/4"	1/4"	1/4"	90	<b>0R25VB</b>	0RB25VB	7/8" Sq.	1.75	1.88	03650 8000
3/8"	3/8"	3/8"	240	<b>0R37VB</b>	0RB37VB	1" Hex	2.06	2.44	03340 0319
1/2"	1/2"	1/2"	450	<b>0R50VB</b>	0RB50VB	1-1/2" Hex	2.88	3.38	03475 0120
3/4"	3/4"	3/4"	550	<b>0R75VB</b>	0RB75VB	1-1/2" Hex	2.88	3.38	03475 0120
<b>PTFE DIAPHRAGMS for higher pressure and temperature (Fibre static seals)</b>									
3/8"	3/8"	3/8"	240	<b>0R37TB</b>	0RB37TB	1" Hex	2.06	2.44	03340 0504


† At 100 PSIG inlet pressure with full pressure drop.

**BOLD ITEMS ARE MOST POPULAR.**

**D**  
 Tanks & Air Chucks  
 Mufflers & Silencers  
 Relief & Exhaust Valves  
 Pressure Switches  
 AirGuard Protection  
 Drain Valves  
 Safety Blow Guns

## Shuttle Valve

## Accessories 1/8" to 3/8" Ports



### General Information


Shuttle valves determine a single pneumatic output from two separate inputs. If pressure is applied to both ports simultaneously, the valve will select the port with the higher pressure.

### Valve Specifications

**Maximum Operating Pressure** .....200 PSIG Maximum  
3 PSIG Minimum: Differential Pressure

**Operating Temperature** .....0° to 160°F\*

\* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

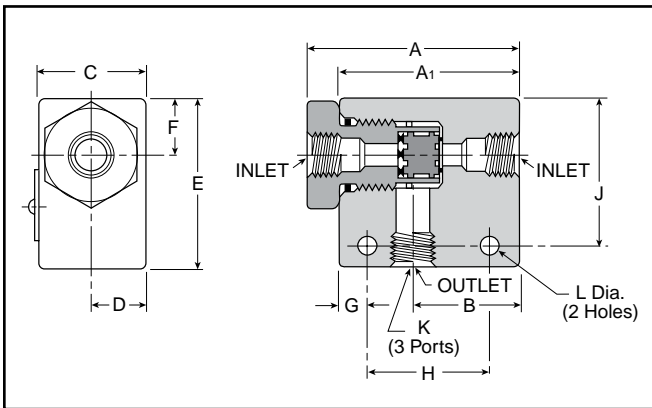

### Component Materials

**Body Material**..... Aluminum

**Internal Components**..... Aluminum

**Seals**.....Nitrile

### Model Selection and Dimensions

Model Number	Port Size	Dimensions											
		A	A1	B	C	D	E	F	G	H	J	K	L
<b>N164 1001</b>	1/8"	N/A	1.62	0.81	0.62	0.31	1.00	0.281	0.312	1.00	0.75	1/8 - 27	0.219
<b>N164 2003</b>	1/4"	2.50	2.12	1.25	1.25	0.62	2.00	0.67	0.265	1.25	1.35	1/4 - 18	0.219
<b>N164 3003</b>	3/8"	2.50	2.12	1.25	1.25	0.62	2.00	0.67	0.265	1.25	1.35	3/8 - 16	0.219

### Performance Data – Flow

Model Number	Port Size	Flow (Cv)
<b>N164 1001</b>	1/8"	0.32
<b>N164 2003</b>	1/4"	1.65
<b>N164 3003</b>	3/8"	2.02

**D**

Tanks & Air Chucks

Mufflers & Silencers

Relief & Exhaust Valves

Pressure Switches


AirGuard Protection

Drain Valves

Safety Blow Guns




## Typical “Quick Exhaust Valve” Applications



### Rapid Retraction – Double Acting Cylinder


In this circuit, air is exhausted through a Quick Exhaust Valve that is **close coupled** to the cap end of the cylinder. Because the Quick Exhaust Valve has a greater exhaust capacity than the four-way Control Valve, increased cylinder speed can be accomplished with a smaller and less expensive control valve.



### Dual Pressure Actuation of Double Acting Cylinder

This circuit utilizes a Quick Exhaust Valve and a three-way Control Valve to permit rapid extension of the cylinder at a high pressure.


**NOTE:** Line pressure must be 3 or 4 times greater than rod end pressure. Effective working pressure is the differential between the cap and rod end.



### Bi-Directional Control of Two Double Acting Cylinders


This circuit provides maximum control with a minimum of valving. A large four-way Control Valve is not needed to permit the rapid retraction of Cylinder A, as the Quick Exhaust Valve performs this function. The extension of Cylinders A and B and retraction of Cylinder B are controlled by Speed Control Valves.

## Typical “Shuttle Valve” Applications




### “OR” Circuit

The most common application of the Shuttle Valve is the “OR” Circuit. Here a cylinder or other work device can be actuated by either control valve. The valves can be manually or electrically actuated and located in any position.



### Memory Circuit

This circuit enables continuous operation once initiated. Pressure is delivered to the circuit when Valve A is actuated. This allows pressure to pass through the shuttle valve actuating Valve B. Pressure then flows through Valve B and also the other side of the shuttle valve which holds Valve B open for continuous operation. To unlock the circuit, Valve C must be opened to exhaust the circuit and allow Valve B to return to its normally closed position.

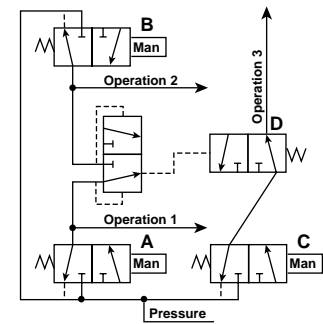


### Interlock

This circuit prevents the occurrence of a specific operation while one or another operation takes place. When either Valve A or B is actuated to perform operation 1 or 2, Valve D is shifted to the closed position and prevents operation 3 from occurring.

D	Tanks & Air Chucks
	Mufflers & Silencers
	Relief & Exhaust Valves
	Pressure Switches
	AirGuard Protection
	Drain Valves
Safety Blow Guns	



## Pressure Switch – PPS1


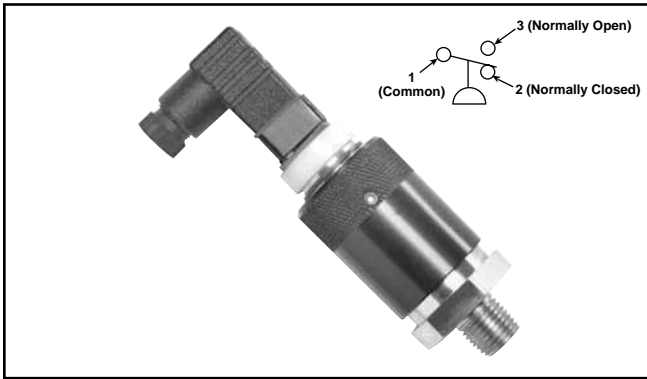


### Features:

- Long life elastomer diaphragm
- High quality snap action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

### Operation

The pressure switch monitors the air pressure in your pneumatic system. When the pressure in your system either drops below or exceeds the set point pressure, an electrical output is given.

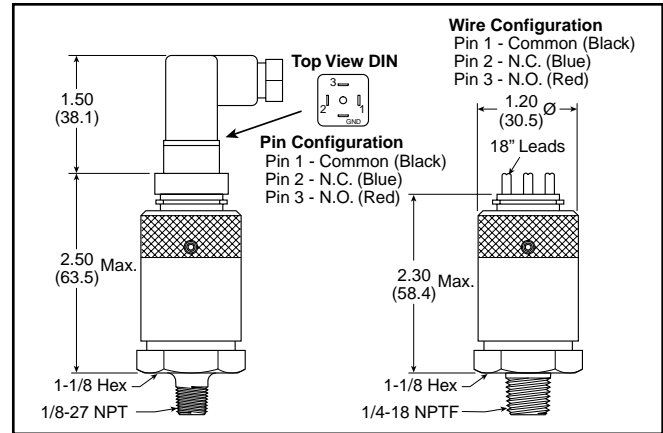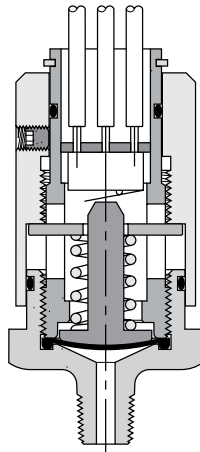

### Definitions and Terminology

**Repeatability** — Accuracy is the maximum allowable set point deviation of a single pressure or temperature switch under one given set of environmental and operational conditions.

**Single Pole Double Throw (SPDT) Switching element** — A SPDT switching element has one normally open, one normally closed and one common terminal. Three terminals mean that the switch can be wired with the circuit either normally open (NO), or normally closed (NC), or both.

**Dead Band** — The dead band, sometimes referred to as “differential” or “hysteresis”, is the change in pressure between actuation and deactuation set points.

### Ordering Information

**PPS1 - 1 C 3 - R HM**

Thread	Circuit	Range	Set Point Direction	Electrical Connection
1 1/4" NPT Male	C SPDT	1 3-10 PSI	R Rising	HM DIN 9.4mm
2 1/8" NPT Male		2 6-30 PSI		WL Wire Leads
17 1/4" BSPP Male		3 20-120 PSI		18"
18 1/8" BSPP Male		4 100-400 PSI†		

\* Factory setting for calibration purposes  
 Range 1 = 6 PSI  
 Range 2 = 18 PSI  
 Range 3 = 70 PSI  
 Range 4 = 250 PSI

† Only available in 1/4" NPT

**Note: Switch is field adjustable.**

### Specifications

Set Point Tolerance	±1 PSI or 5% (.07 bar)	
Temperature Range	-40F° to 220F° (-40C° to 105C°)	
Max. Operating Pressure (Ranges 1, 2, 3)	250 PSI (17.2 bar)	
Max. Operating Pressure (Range 4)	2000 PSI (137.9 bar)	
Deadband	10 - 20% of set pressure	
Current Rating	3A @ 125 VAC 2A @ 30 VDC (Resistive)	
Circuit Form	SPDT Standard	
Cycle Life	1 Million	

### Materials of Construction

Adjustment Knob	Anodized Aluminum
Body	Brass
Diaphragm	Nitrile



**WDV3-G**


The WDV3 Electrical Drain is designed to remove condensate from compressors, compressed air dryers and receivers up to any size, type or manufacturer.

The WDV3 offers true installation simplicity and it is recognized as the most reliable and best performing condensate drain worldwide. The large orifice in the direct acting valve, combined with its sophisticated timer module ensure many years of trouble-free draining of condensate.

**Benefits**

- Does Not Air-Lock During Operation
- Compressed Air Systems Up to Any Size
- Also Available In Stainless Steel
- The Direct Acting Valve Is Serviceable
- Suitable for All Types of Compressors
- TEST (Micro-Switch) Feature
- High Time Cycle Accuracy
- Large (4.5mm) Valve Orifice

**Ordering Information**

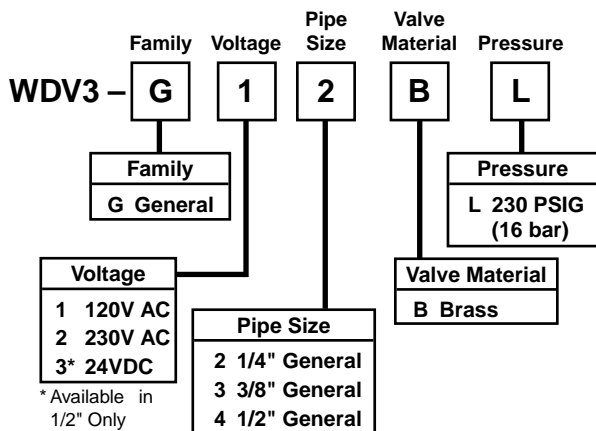


**Specifications**

- Operating Pressure**..... 230 PSIG (15,9 bar)
- Ambient Operating Range Temperature:**  
34° to 130°F (1.1° to 54°C)
- Coil Insulation**  
Class H ..... 340°F (171.1°C)
- Voltages**  
AC ..... 115, 230/50-60
- Timer:**  
Open Time ..... .5 to 10 sec., Adjustable  
Cycle Time..... .5 sec. to 45 min., Adjustable
- Maximum Current Rating** ..... 4mA Max.
- Port Size**..... 1/4, 3/8, 1/2 NPT
- Weight** ..... 1.8 lb. (0.8 kg)

**Materials of Construction**

- Valve Body** ..... Brass / Stainless Steel
- Enclosure (NEMA 4)**..... ABS Plastic
- Internal Parts** ..... Brass / Stainless Steel
- Sealing Material**..... FPM (Fluorocarbon)

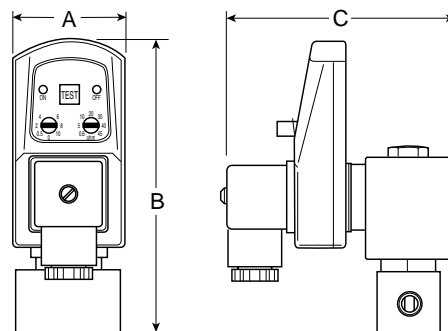

**Model Selection and Dimensions**

Model Number	A	B	C
WDV3-G**BL	1.73 (44)	4.53 (115)	3.46 (88)

**D**

- Tanks & Air Chucks
- Mufflers & Silencers
- Relief & Exhaust Valves
- Pressure Switches
- AirGuard Protection
- Drain Valves
- Safety Blow Guns



Zero air loss condensate drains are designed for economical removal of unwanted water, oil emulsions, and other liquids. These drains will only open when liquid is present and will not allow any compressed air to escape from the system.

**Operating Information**

Maximum pressure	232 PSIG (16 bar)
Ambient operating temperature	35°F to 140°F (1.6°C to 60°C)
Voltages	NPT 115/50-60Hz, standard
Optional:	BSPP ports 230/50-60Hz & 24VDC

**Zero Air Loss Condensate Drains**


Port size (NPT)	Compressor Aftercooler (SCFM)*	Capacity Refrigeration Dryer (SCFM)**	Filter (SCFM)	Drain Capacity per Day (gal/liter)	Model Number	Service Kit
1 @ 3/8 (in), 1 @ 3/8 (out)	—	—	424	6 (22.7)	<b>ED3002N115-K</b>	<b>SKED3000N115</b>
1 @ 1/2 (in), 1 @ 3/8 (out)	141	282	1,413	13 (49.2)	<b>ED3004N115-K</b>	<b>SKED3000N115</b>
2 @ 1/2 (in), 1 @ 3/8 (out)	247	494	2,472	23 (87.1)	<b>ED3007N115-K</b>	<b>SKED3000N115</b>
2 @ 1/2 (in), 1 @ 3/8 (out)	1,059	2,119	10,594	100 (378.5)	<b>ED3030N115-K</b>	<b>SKED3000N115</b>
2 @ 1/2 (in), 1 @ 3/8 (out)	3,532	7,063	35,315	330 (1,249.2)	<b>ED3100N115-K</b>	<b>SKED3000N115</b>

\* Based on 100 PSI working pressure, air compressor inlet at 77°F (25°C) at 60% RH, air discharge temperature of 95°F (35°C) following the aftercooler, pressure dewpoint of 37°F (2.8°C) after the refrigerated dryer.


\*\* Condensate from aftercooler or refrigerated dryer to be drained upstream – only for residual oil content or small quantities of condensate.

Note: A 6 ft. line cord will be included with each drain.

**Where are condensate drains used?**

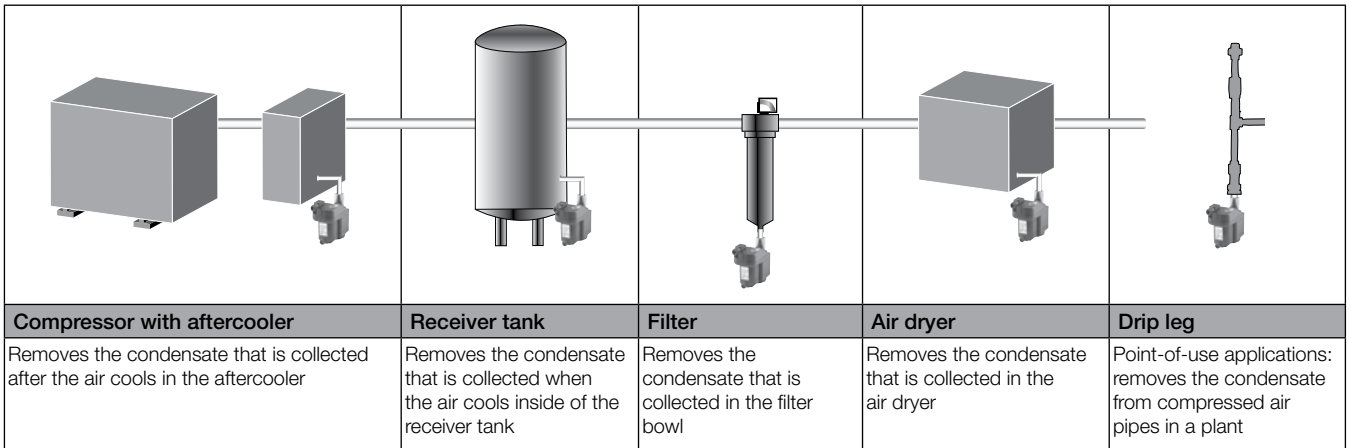

**Dimensions**

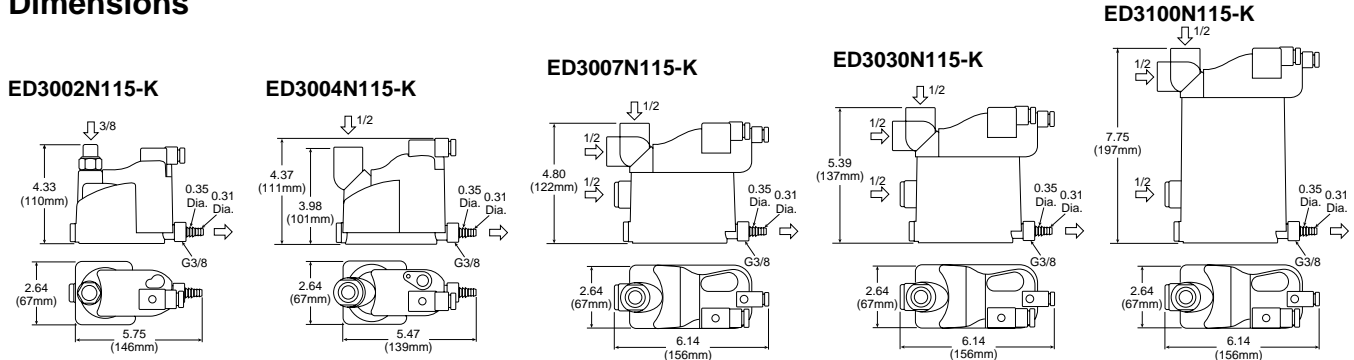

**D**

- Tanks & Air Chucks
- Mufflers & Silencers
- Relief & Exhaust Valves
- Pressure Switches
- AirGuard Protection
- Drain Valves
- Safety Blow Guns

**Safety Blow Guns**

**Brass Nozzle & Vortec FLO-GAIN Blow Guns**

**O.S.H.A. Certification** — All safety blow guns conform to the requirements of Compressed Air Standards as currently described in the U.S. Bureau of Labor Standards, paragraph 1910.242, when pressurized at the inlet to a maximum of 100 PSIG. Conform to current O.S.H.A. Directive No. 100-1.

**Brass Nozzle Blow Guns**

Contoured lever or button control both provide a natural, comfortable grip even when used with gloves. Finger guard and hang-up hook for finger protection and quick safe storage. Die cast zinc body, painted finish.


**Lever Operated**

Part Number	Inlet Port	SCFM Rating*
00475 0010	1/4"	20

**Button Operated**

Part Number	Inlet Port	SCFM Rating*
00470 0010	1/4"	20

\*Based on 100 PSIG inlet pressure.

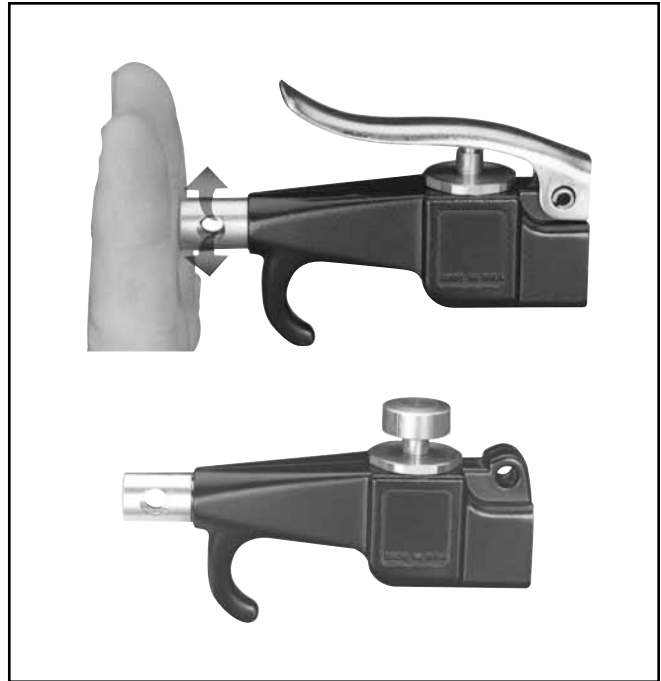

**Vortec FLO-GAIN Blow Guns**

A quiet Vortec FLO-GAIN nozzle is combined with a high performance blow gun. Compressed air attains sonic velocity through an adjustable slot and attaches to the exterior surface of the cone shaped nozzle. Settings are shown on a micrometer dial. Sound level of 80 dBA with 80 PSIG inlet. Finger guard and hang-up hook offers desirable finger protection and quick secure storage. Die cast zinc body, painted finish.


**Lever Operated**

Part Number	Inlet Port	SCFM Rating*
00475 0900	1/4"	70+

**Button Operated**

Part Number	Inlet Port	SCFM Rating*
00470 0900	1/4"	70+

\*Based on 100 PSIG inlet pressure.

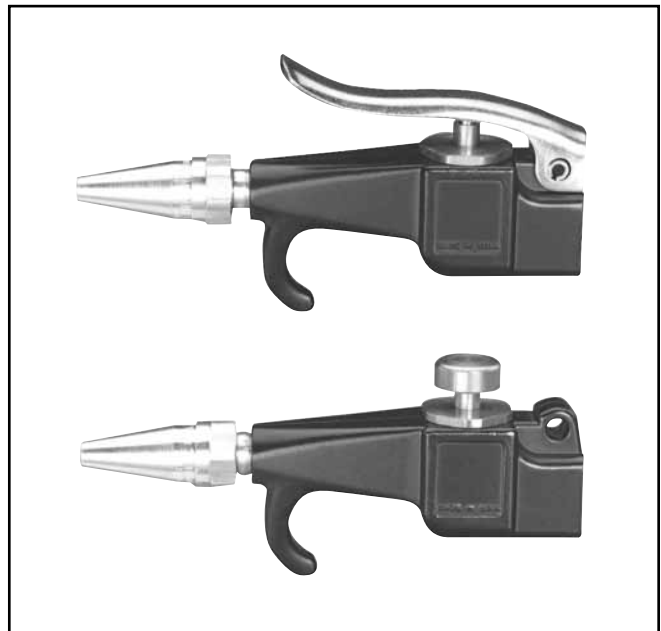


**D**  
Tanks & Air Chucks  
Mufflers & Silencers  
Relief & Exhaust Valves  
Pressure Switches  
AirGuard Protection  
Drain Valves  
Safety Blow Guns

### Self-Regulating Blow Gun

Designed with integral self-regulating pressure reducing valve for automatic shut-off when nozzle is blocked. Prevents air pressure buildup over 30 PSIG in compliance with U.S. Dept. of Labor standards.

Air shield aids in protecting the operator against blow back of flying chips of dirt. Designed to operate at less than 90 dBA to comply with government regulations. Die cast zinc body, painted finish.

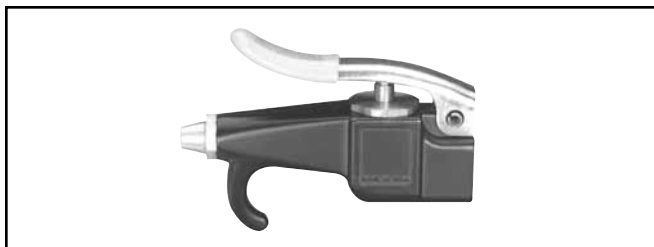

**Lever Operated**

Part Number	Inlet Port	SCFM Rating*
00475 2900	1/4"	10

**Performance Data**

Inlet Pressure	Blocked Pressure	Sound Level
70 PSIG	17.0 PSIG	79 dBA
100 PSIG	21.0 PSIG	83 dBA
175 PSIG	28.0 PSIG	87 dBA

\*Based on 100 PSIG inlet pressure.

### Pistol Grip Blow Gun

Pistol grip is easy to aim for quick and efficient cleaning. Ideal for all shop housekeeping purposes. Lightweight and easy to handle. Easy trigger action features instant spring adjustment for controlled air. Get the amount of air where you want it with no restrictions, no cut-offs! Makes for a convenient connection for overhead or under bench floor air use.




Part Number	Inlet Port	Rated Pressure	Temperature Range	OSHA Rated
BG441-NBL	1/4"	175 PSI	120° F	No


### Brass Nozzle

#### Model No. 00470 7020

General purpose nozzles are supplied as standard on 00470 0010, 00475 0010 and 07184 1000 blow guns. Conform to the requirements of the Williams Steiger Occupational Safety and Health Act of 1970, paragraph 1910.242 when fitted with blow guns pressurized at the inlet to a maximum of 100 PSIG. Conform to O.S.H.A. Directive 100-1.

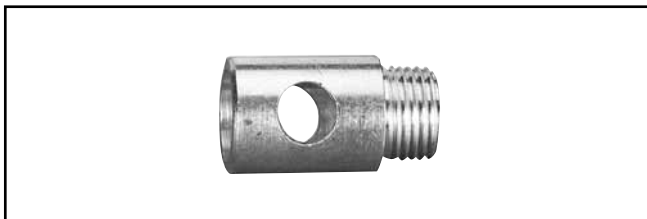

### 470 and 475 Series Blow Guns

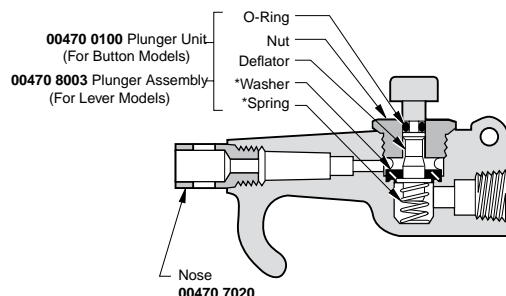

\* Contained in Service Kit No. 00470 0090

D
Tanks & Air Chucks
Mufflers & Silencers
Relief & Exhaust Valves
Pressure Switches
AirGuard Protection
Drain Valves
Safety Blow Guns

**Notes**

---

**D**

Tanks & Air Chucks
Mufflers & Silencers
Relief & Exhaust Valves
Pressure Switches
AirGuard Protection
Drain Valves
Safety Blow Guns

# Ball Valves

1/4" to 2", 2-Way

1/4" to 1", 2-Way Vented

# Plug Valves

1/8" to 1/4" Pipe Size

## Section E



### E

Product Index

Ball Valves

Stainless Steel Ball Valves











Plug Valves

Product Index ..... E2  
Ball Valves  
    Basic Features ..... E3  
    Part Numbers & Dimensions..... E4  
Stainless Steel Ball Valves ..... E5

Plug Valves  
    Basic Features ..... E6  
    Part Numbers & Dimensions..... E7  
Drain Cocks  
    Basic Features ..... E8  
    Part Numbers ..... E8



**Product Index**

<b>Product Index</b>	<b>Brass Ball Valves</b>	<p><b>XV500P</b> Female-Female</p>  <p style="text-align: right;">Page E4</p>	<p><b>MV200</b> Mini Valve</p>  <p style="text-align: right;">Page E4</p>	<p><b>MV608</b> Mini Valve</p>  <p style="text-align: right;">Page E4</p>	<p><b>MV609</b> Mini Valve</p>  <p style="text-align: right;">Page E4</p>		
	<b>Stainless Steel Valves</b>	<p><b>XV502SS</b> Female-Female</p>  <p style="text-align: right;">Page E5</p>					
	<b>Plug Valves &amp; Drain Cocks</b>	<p><b>PV607</b> Male-Male Plug Valve</p>  <p style="text-align: right;">Page E7</p>	<p><b>PV608</b> Male-Female Plug Valve</p>  <p style="text-align: right;">Page E7</p>	<p><b>PV609</b> Female-Female Plug Valve</p>  <p style="text-align: right;">Page E7</p>	<p><b>DC602</b> Internal Seal Drain Cock</p>  <p style="text-align: right;">Page E8</p>	<p><b>DC604</b> External Seal Drain Cock</p>  <p style="text-align: right;">Page E8</p>	

<b>E</b>
Product Index
Ball Valves
Stainless Steel Ball Valves
Plug Valves

Materials of Construction	
Valve Body:	Forged brass
Ball:	Chrome plated brass
Seats / Seals:	PTFE
Handle:	Steel


Style	Type	Material	Size	Options
V	500	P	-4	-00
Style	<ul style="list-style-type: none"> <li>•V-Valve</li> <li>•VP-Valve, Padlocking handle</li> <li>•VV-Valve, Vented</li> <li>•VVP-Valve, Vented, Padlocking handle</li> </ul>			
Type	500-Female / Female PTF ports			
Material	P- Brass PN-Nickel plated			
Size	4 = 1/4", 6 = 3/8", 8 = 1/2", 12 = 3/4", 16 = 1", 20 = 1-1/4", 24 = 1-1/2", 32 = 2"			
Options	<ul style="list-style-type: none"> <li>•01-Stainless steel ball &amp; stem</li> <li>•02-Stainless steel handle &amp; nut</li> <li>•03-Stainless steel ball, stem, handle &amp; nut</li> <li>•04-Tee handle</li> <li>•08-Unmarked yellow vinyl handle cover</li> <li>•21-Oval handle</li> </ul>			



Parker's industrial ball valve product line is intended for general purpose use. Please be aware that ball valves are intended for use in the fully open or closed positions. Depending on application conditions, throttling of the valve may result in premature seal failure and/or inability to turn the valve handle.

For use as fuel line shutoffs for gasoline and diesel powered over the highway, off highway, and construction equipment vehicles. Water and air service lines on capital equipment and plant design plumbing that require total shutoff capability.


Specifications	
Operating Instructions:	Quarter turn is "ON" or "OFF". (Provides positive stop action for full shutoff.)
Pressure Range:	<ul style="list-style-type: none"> <li>•600 WOG, cold non-shock</li> <li>•Saturated steam up to 150 PSI and 400°F</li> <li>•Vacuum service to 29 inches Hg.</li> <li>•Vented up to 250 PSI</li> </ul>
Temperature Ranges:	0° to +350°F
Note:	Periodically check the adjustable packing nut and tighten as required.

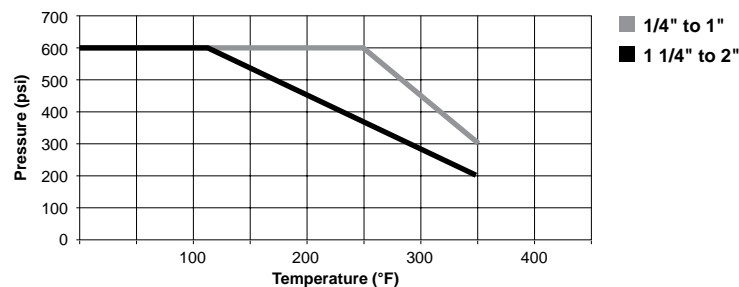

Flow Data	
Valve Size	Cv
1/4	4.0
3/8	5.8
1/2	12.0
3/4	25.0
1	35.0
1-1/4	57.0
1-1/2	92.0
2	224.0


<b>E</b>
Product Index
Ball Valves
Stainless Steel Ball Valves
Plug Valves

**Part Numbers**

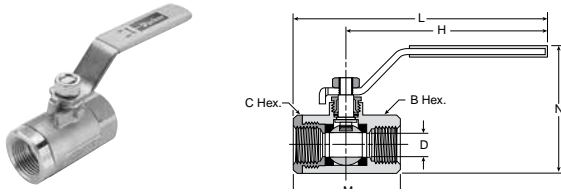

**Female-Female Pipe Ends XV500P**

Part No.	Pipe Thread	B Hex	C Hex	H	L	M	N	Flow Dia. D
XV500P-4	1/4	15/16	15/16	3.96	4.90	2.03	2.47	.375
XV500P-6	3/8	15/16	15/16	3.96	4.90	2.03	2.47	.375
XV500P-8	1/2*	1-1/16	1-1/16	3.96	5.00	2.20	2.58	.500
XV500P-12	3/4**	1-1/4	1-5/16	3.96	5.25	2.42	2.81	.685
XV500P-16	1**	1-1/2	1-9/16	3.96	5.34	2.75	3.08	.875

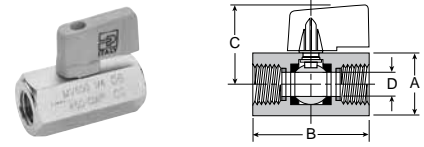

**Female Pipe Ends, Compact Handle, Mini Ball Valve MV609**

Part No.	Pipe Thread	A Hex	B	C	Flow Dia. D
MV609-2	1/8	.83	1.71	1.22	.24
MV609-4	1/4	.83	1.71	1.22	.31
MV609-6	3/8	.83	1.71	1.22	.31
MV609-8	1/2	.98	2.11	1.30	.39
MV609-6-4	3/8x1/4	.83	1.71	1.22	.31




Product Index

Ball Valves


Stainless Steel Ball Valves

Plug Valves

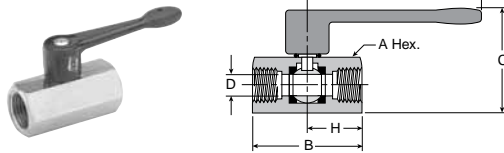

**Female Pipe Ends, Lever Handle, Mini Ball Valve MV200**

Part No.	Pipe Thread	A Hex	B	C	H	L	Flow Dia. D
MV200-2	1/8	.83	1.71	1.20	.91	2.83	.31
MV200-4	1/4	.83	1.71	1.20	.91	2.83	.31
MV200-6	3/8	.83	1.71	1.20	.91	2.83	.31
MV200-8	1/2	.98	2.11	1.28	1.10	2.83	.39

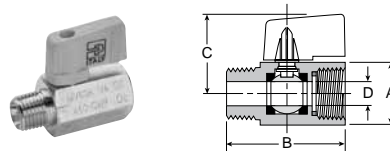

**Male-Female Pipe Ends, Compact Handle, Mini Ball Valve MV608**

Part No.	Pipe Thread	A Hex	B	C	Flow Dia. D
MV608-2	1/8	.83	1.72	1.22	.20
MV608-4	1/4	.83	1.72	1.22	.31
MV608-6	3/8	.83	1.72	1.22	.31
MV608-8	1/2	.98	2.11	1.30	.39

Materials of Construction	
Valve Body:	CF-8M Stainless Steel
Ball:	Stainless Steel
Seats / Seals:	PTFE
Handle:	Stainless Steel

Pressure and Temperature Range	
Pressure Range	2,000 PSI Sizes: 1/4" - 1" 1,500 PSI Sizes: 1-1/4" - 2"
Temperature Range	0° to +400°F

Style	Type	Material	Size	Options
V	502	SS	-4	-00
Style	V - Valve VP - Valve, Padlocking handle			
Type	502-Panel mount female/Female PTF ports			
Material	SS-stainless steel			
Size	4 = 1/4", 6 = 3/8", 8 = 1/2", 12 = 3/4", 16 = 1", 20 = 1-1/4", 24 = 1-1/2", 32 = 2"			
Options	20 - Short handle 21 - Oval handle 35 - Welded retainer nut			

Approvals
Meets material requirements of NACE MR-01-75




Parker's industrial ball valve product line is intended for general purpose use. Please be aware that ball valves are intended for use in the fully open or closed positions. Depending on application conditions, throttling of the valve may result in premature seal failure and/or inability to turn the valve handle.


Applications include chemical plants, refineries, steel mills, industrial fuel lines and agricultural equipment. Meets material requirements of NACE MR-01-75.

Flow Data	
Valve Size	Cv
1/4	4.0
3/8	6.0
1/2	14.0
3/4	35.0
1	54.0
1-1/4	74.0
1-1/2	120.0
2	226.0

Note: Periodically check the adjustable packing nut and tighten as required.

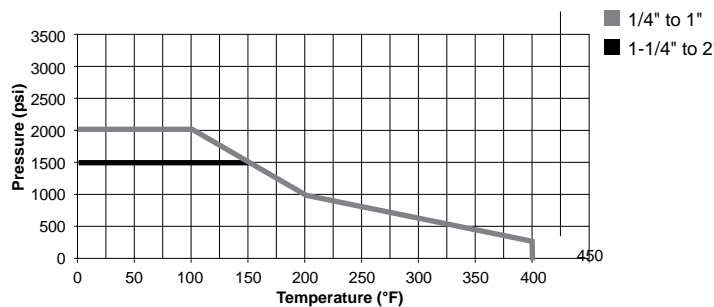


**Mounting Detail**



**Female Pipe Ends, Panel Mount XV502SS**

Part No.	Pipe Thd (NPT)	B/C Hex	F	G	H	I THD	L	M	N	Panel Flow Dia. D	Hole Dia.
XV502SS-4	1/4	15/16	.500	1.125	4.00	10-24 UNC	5.03	2.07	2.52	.380	1.125
XV502SS-6	3/8	15/16	.500	1.125	4.00	10-24 UNC	5.03	2.07	2.52	.380	1.125
XV502SS-8	1/2	1-1/16	.500	1.125	4.00	10-24 UNC	5.13	2.27	2.65	.500	1.125
XV502SS-12	3/4	1-3/8	.875	1.375	5.00	10-24 UNC	6.67	3.35	3.46	.790	1.500
XV502SS-16	1	1-5/8	.875	1.375	5.00	10-24 UNC	6.77	3.54	3.74	1.000	1.500
XV502SS-20	1-1/4	2	1.000	1.500	7.00	1/4-20 UNC	9.00	4.00	4.55	1.250	2.000
XV502SS-24	1-1/2	2-3/8	1.000	1.500	7.00	1/4-20 UNC	7.19	4.38	5.42	1.500	2.000
XV502SS-32	2	3	1.000	1.500	7.00	1/4-20 UNC	9.75	5.50	5.68	2.000	2.000

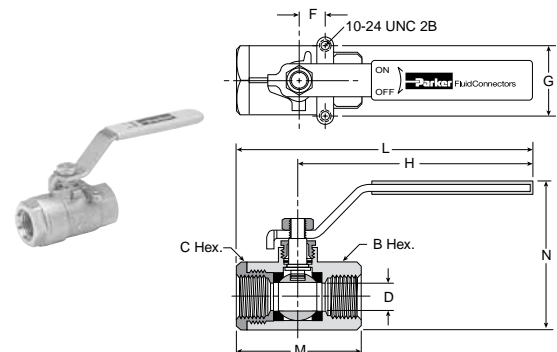

<b>E</b>
Product Index
Ball Valves
Stainless Steel Ball Valves
Plug Valves

**Features**

Materials of Construction	
Fitting:	Brass
Nut:	Brass
Ferrule:	Brass

Nomenclature	
Example: PV607-2-options	Attribute:
PV	Plug valve
607	Male to male
2	1/8" Male
N (not shown)	Neoprene (brown)
V (not shown)	Fluorocarbon (red)

Specifications	
Pressure Range	Up to 250 PSI
Temperature Range	-40° to +175°F




Compact design features internal nitrile seals and a one-piece extruded brass body, offering compatibility with a wide range of media. The one-piece stem / handle combination is constructed of glass reinforced acetal copolymer. Parker plug valves feature 1/4 turn shutoff allowing for ease of operation. All plug valves are 100% leak tested and are certified to be leak free to one SCCM.

**Installation Instructions**

To assure sealability and reliable performance, the valve must be installed so that the flow media travels in the direction of the arrow on the valve handle.

**Valve Components**

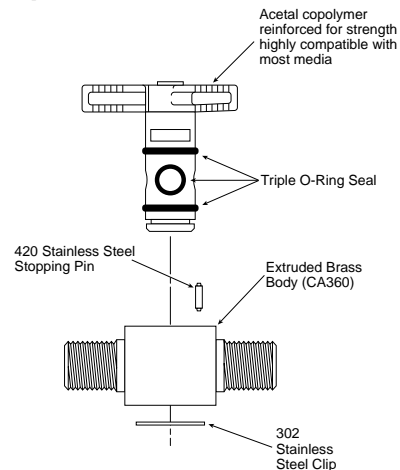


Product Index

Ball Valves

Stainless Steel Ball Valves


Plug Valves

**Part Numbers**

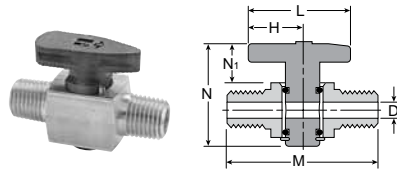


**Male Pipe to Male Pipe Plug Valve PV607**

Part No.	Pipe Thread	H	L	M	N	N1	Flow Dia. D
PV607-2	1/8	.67	1.34	1.66	1.38	.51	.200
PV607-4	1/4	.67	1.34	2.02	1.38	.51	.200

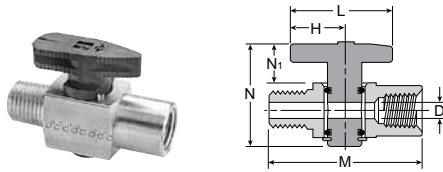

**Female Pipe to Male Pipe Plug Valve PV608**

Part No.	Pipe Thread	H	L	M	N	N1	Flow Dia. D
PV608-2	1/8	.67	1.34	1.67	1.38	.51	.200
PV608-4	1/4	.67	1.34	2.06	1.38	.51	.200

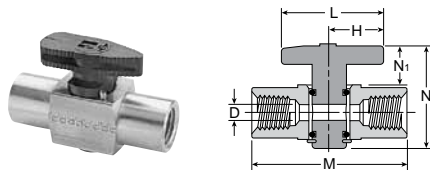

**Female Pipe to Female Pipe Plug Valve PV609**

Part No.	Pipe Thread	H	L	M	N	N1	Flow Dia. D
PV609-2	1/8	.67	1.34	1.68	1.38	.51	.200
PV609-4	1/4	.67	1.34	2.10	1.38	.51	.200

**E**

Product Index

Ball Valves

Stainless Steel Ball Valves

Plug Valves

Drain Cock Nomenclature	
Example: DC604-2	Attribute:
DC	Drain Cock
604	External Seat
2	1/8 Pipe Thread

Ground Plug Shutoff Nomenclature	
Example: V204F-4-2	Attribute:
V	Valve
204	Flared to Male Pipe
F	Flared
4	1/4 Tube O.D.
2	1/8 Pipe Thread

Specifications	
Ground plug shutoff:	30 PSI
Drain Cocks	150 PSI
Temperature Ranges:	See specific part number for temperature range
Operating Fluid:	Air, water, gas and certain other fluids.
Note:	Lubricant may not be compatible with some fluids, contact factory for special fluid requirements



Drain cocks are manufactured in both external and internal seats. Ground plug shutoffs are manufactured from castings or forged bodies for extra strength. Hand tightening provides a metal - to - metal seal.



Product Index


Ball Valves

Stainless Steel Ball Valves

Plug Valves

**Internal Seal Drain Cock DC602**


Temperature Range: -65° to +250°F



Part No.	Pipe Thread	C Hex	L	M
DC602-2	1/8	13/32	.92	1.25
DC602-4	1/4	9/16	.94	1.25

**External Seal Drain Cock DC604**

Temperature Range: -25° to +250°F



Part No.	Pipe Thread	C Hex	L	M
DC604-2*	1/8	7/16	.85	1.25
DC604-4	1/4	9/16	1.00	1.38
DC604-6*	3/8	11/16	1.22	1.68

\*When assembled handle wings are down facing



# Quick Couplings

## Section F



Industrial Interchange Nipples.....	F2-F3
Sleevomatic Couplers.....	F4-F6
Saflomatic Couplers .....	F7-F8
Economatic Quick Connect Couplings .....	F9-F10

**F**

Industrial  
Interchange  
Nipples

Sleevomatic  
Couplers

Saflomatic  
Couplers


Economatic  
Quick Connect  
Couplers

**Description**


Industrial interchange nipples conform to MIL-C4109 and are for use with either Sleevmatic or Saffromatic couplers. The industrial interchange nipples are completely interchangeable with similar nipples manufactured by other quick coupling manufacturers conforming to A-A-59439 (formerly known as MIL-C-4109F), ANSI/(NFPA) T3.20.14-1990, or ISO6150-B requirements.

Hardened wear points and solid barstock construction provide long service life. Precision machined surfaces and hardened load-bearing areas resist the effects of mechanical shock in the most rugged applications.

**Female Pipe Thread**



**Male Pipe Thread**



Body Size (Inches)	Part No. Steel	Thread Size	Overall Length D	Exposed Length* E	Hex Size F	Largest Diameter G
1/4	H1C	1/8-27	1.48	0.71	0.50	0.58
1/4	H3C	1/4-18	1.56	0.80	0.62	0.72
1/4	H3C-E	3/8-18	1.60	0.83	0.81	0.94
3/8	H1E	1/4-18	1.60	0.69	0.62	0.72
3/8	H3E	3/8-18	1.69	0.74	0.81	0.94
3/8	H3E-F	1/2-14	1.84	0.90	1.00	1.16
1/2	H1F	3/8-18	2.03	0.79	0.81	0.94
1/2	H3F	1/2-14	2.20	0.96	1.00	1.16
1/2	H3F-G	3/4-14	2.30	1.05	1.25	1.44
3/4	H3G-F	1/2-14	2.22	1.06	1.00	1.16
3/4	H3G	3/4-14	2.18	1.02	1.25	1.44
3/4	H3G-J	1-11½	2.41	1.25	1.63	1.80


\* This dimension represents portion of nipple that is exposed when nipple is inserted in the coupler.

Body Size (Inches)	Part No. Steel	Thread Size	Overall Length D	Exposed Length* E	Hex Size F	Largest Diameter G
1/4	H0C	1/8-27	1.68	0.92	0.50	0.58
1/4	H2C	1/4-18	1.66	0.89	0.56	0.65
1/4	H2C-E	3/8-18	1.90	1.14	0.69	0.80
3/8	H00E	1/8-27	1.68	0.73	0.62	0.72
3/8	H0E	1/4-18	1.90	0.95	0.62	0.72
3/8	H2E	3/8-18	1.90	0.95	0.69	0.80
3/8	H2E-F	1/2-14	2.03	1.09	0.88	1.02
1/2	H0F	3/8-18	2.20	0.96	0.69	0.79
1/2	H2F	1/2-14	2.35	1.09	0.88	1.01
1/2	H2F-G	3/4-14	2.40	1.16	1.06	1.22
3/4	H2G-F	1/2-14	2.32	1.16	1.00	1.16
3/4	H2G	3/4-14	2.28	1.12	1.06	1.22
3/4	H2G-J	1-11½	2.56	1.40	1.31	1.52

\* This dimension represents portion of nipple that is exposed when nipple is inserted in the coupler.

**Industrial Interchange Nipples**  
 Sleevmatic Couplers  
 Saffromatic Couplers  
 Economat Quick Connect Couplers


### Standard Hose Barb

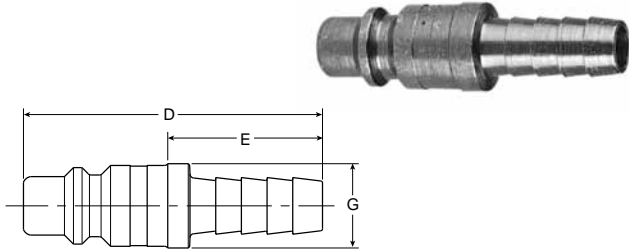

Body Size (Inches)	Part No. Steel	Hose I.D.	Overall Length D	Exposed Length* E	Largest Diameter G
1/4	H8C	1/4	1.72	0.95	0.46
1/4	H8C-D	5/16	1.96	1.20	0.50
1/4	H9C	3/8	1.96	1.20	0.50
3/8	H5E	3/8	1.85	0.90	0.59
3/8	H6E	1/2	2.09	1.14	0.68
1/2	H4F	3/8	2.36	1.12	0.66
1/2	H5F	1/2	2.36	1.12	0.66
1/2	H5F-G	3/4	2.95	1.71	0.87
3/4	H5G-F	1/2	2.47	1.31	0.93
3/4	H5G	3/4	3.00	1.84	0.93
3/4	H5G-J	1	3.24	2.08	1.24

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.

### Push-Lok Hose Barb\*\*

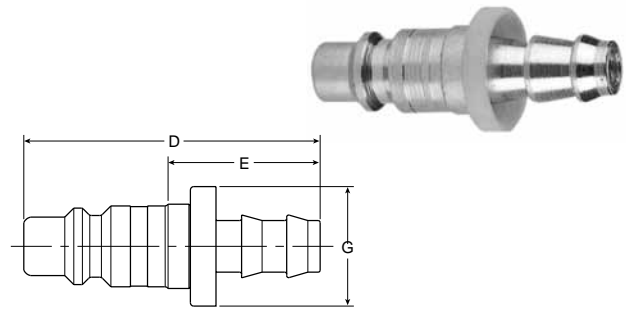



Body Size (Inches)	Part No. Steel	Hose I.D.	Overall Length D	Exposed Length* E	Largest Diameter G
1/4	H8CP	1/4	1.93	1.16	0.69
1/4	H9CP	3/8	2.08	1.31	0.86
3/8	H4EP	1/4	2.02	1.08	0.69
3/8	H5EP	3/8	2.17	1.23	0.88
3/8	H6EP	1/2	2.31	1.37	0.97
1/2	H4FP	3/8	2.52	1.27	0.88
1/2	H5FP	1/2	2.66	1.42	0.97
1/2	H6FP	1/2	2.95	1.71	1.14

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.

\*\* Push-Lok hose barbs are designed for use with a push-lok hose and do not require clamps.

## Features & Specifications

## Quick Couplings Sleevmatic Couplers

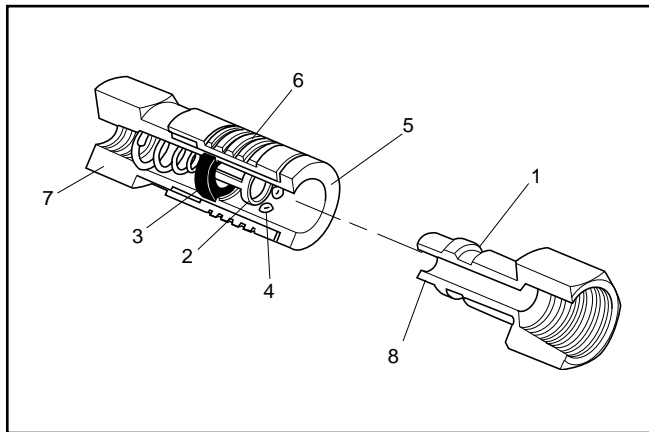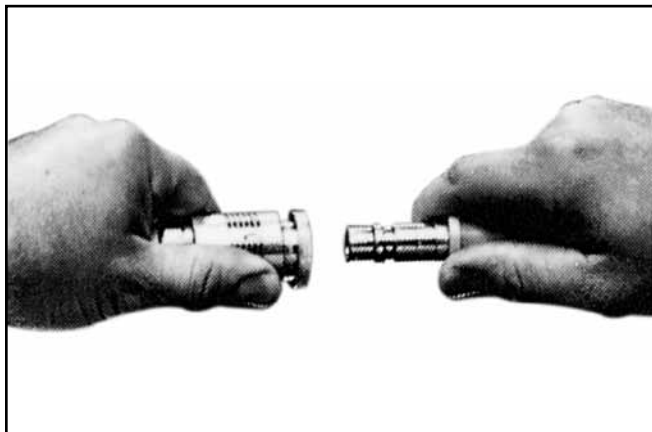

### Operation

Sleeve type couplings are widely used to connect air and low-pressure fluid hose lines.

Their compact and economical design uses a ball locking mechanism consisting of captive steel balls that engage the locking groove on the mating nipple. As pictured, the sliding spring loaded sleeve on the coupler must be manually retracted in order to connect or disconnect the nipple. It is easy to do, but two hands are normally required.

Common applications include compressed air, water, grease, paint, limited vacuum and limited gases.

### Features

1. Hardened wear points and solid barstock construction provide long life for these quality couplings. Precision machined surfaces resist the effects of mechanical shocks, even in rugged use.
2. Tubular valve with large flow passages delivers high air flows with minimal pressure drop for efficient performance.
3. Molded seals with high quality valve seats form a bubble tight seal for reliable sealing within rated working pressures. The tubular valve minimizes wear on the seal and prolongs seal life.
4. Ball locking mechanism with large numbers of steel or stainless steel locking balls improves resistance to wear, insures positive connections and provides accurate alignment. The ball locking also allows swiveling action that reduces hose torque.
5. Sleeve guard resists accidental disconnection by allowing the coupling to ride over obstructions without the sleeve being accidentally retracted. It also contributes to greater strength.
6. Knurling and grooves on sleeve provide gripping surfaces for ease of operation.
7. Wide range of sizes, materials and end terminations are available. Sleeve type quick couplings are offered with male pipe, female pipe, push-lok hose barb and standard hose barb ends. Materials offered are Nitrile, Ethylene, Propylene and Fluorocarbon for seals and brass or steel for metals.
8. Interchangeability. Sleeve type couplings are used with industrial interchange nipples conforming to MIL-C4109.

### Specifications


	Body Size		
	1/4	3/8	1/2
<b>Rated Pressure (psi)</b>	300	300	300
<b>Temperature Range</b>			
Nitrile	-40°F to 250°F		
Ethylene Propylene	-65°F to 400°F		
Fluorocarbon	-30°F to 400°F		
<b>Locking Device</b>	4 Balls	8 Balls	8 Balls
<b>Vacuum Data (inches Hg)*</b>			
Disconnected (coupler only)	Not recommended		
Connected	27.4	27.4	27.4

\* Couplings for vacuum service should be 100% tested – an extra cost service. Consult factory.

### Performance


#### Sleevmatic

1/4", 3/8", 1/2"

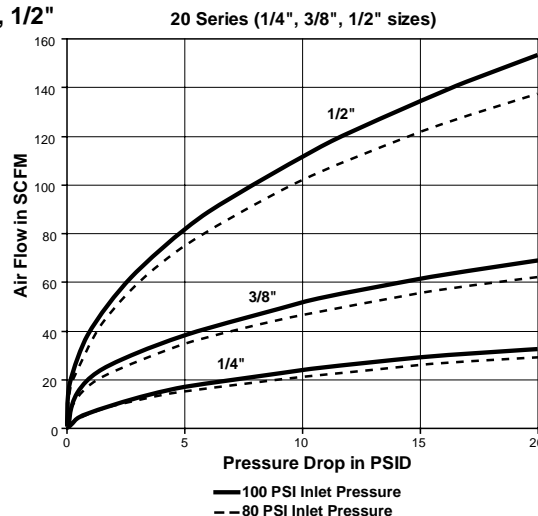


**F**  
 Industrial Interchange Nipples  
 Sleeve type Couplers  
 Salfomatic Couplers  
 Economical Quick Connect Couplers

**Female Pipe Thread**

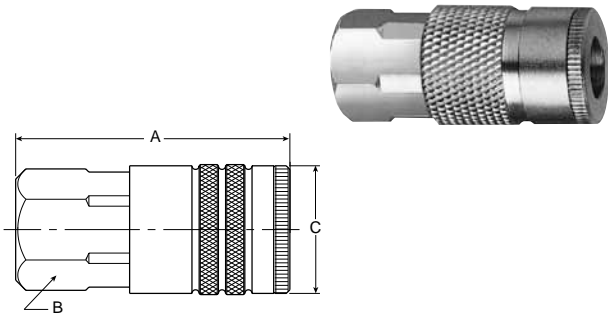

Body Size (Inches)	Part No.		Thread Size	Overall Length A	Hex Size B	Largest Diameter C
	Brass	Steel				
1/4	B23A	—	1/8-27	1.83	0.75	0.90
1/4	B23	—	1/4-18	1.83	0.75	0.90
1/4	B23E	—	3/8-18	1.95	0.81	0.94
3/8	—	25C	1/4-18	2.22	0.88	1.06
3/8	—	25	3/8-18	2.28	0.88	1.06
3/8	—	25F	1/2-14	2.55	1.00	1.16
1/2	—	17E	3/8-18	2.74	1.00	1.19
1/2	—	17	1/2-14	2.96	1.00	1.19
1/2	—	17G	3/4-14	3.19	1.25	1.44

**Male Pipe Thread**

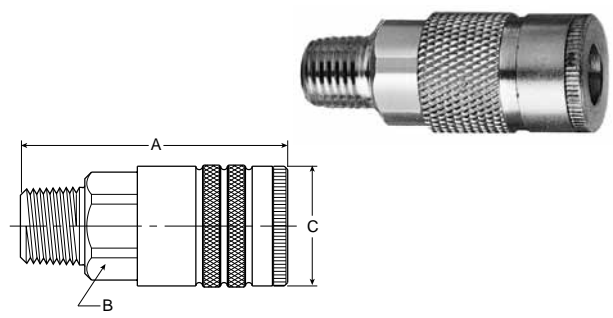


Body Size (Inches)	Part No.		Thread Size	Overall Length A	Hex Size B	Largest Diameter C
	Brass	Steel				
1/4	B22A	—	1/8-27	1.89	0.75	0.90
1/4	B22	—	1/4-18	2.05	0.75	0.90
1/4	B22E	—	3/8-18	2.08	0.75	0.90
3/8	—	24C	1/4-18	2.36	0.88	1.06
3/8	—	24	3/8-18	2.39	0.88	1.06
3/8	—	24F	1/2-14	2.55	0.88	1.06
1/2	—	16E	3/8-18	2.93	1.00	1.19
1/2	—	16	1/2-14	3.08	1.00	1.19
1/2	—	16G	3/4-14	3.21	1.13	1.30

**NOTE:** To indicate Fluorocarbon seals, add the letter Y as a suffix to the catalog number of the coupler. To indicate Ethylene Propylene seals, add the letter W as a suffix to the catalog number of the coupler.  
 Example: B23AY or B23AW


**F**  
 Industrial Interchange Nipples  
 Sleevmatic Couplers  
 Safilmatic Couplers  
 Economical Quick Connect Couplers

### Standard Hose Barb

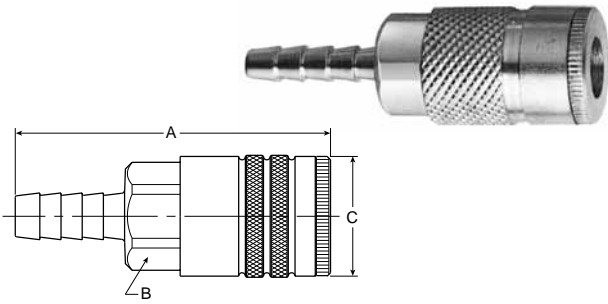

Body Size (Inches)	Part No.		Hose I.D.	Overall Length A	Hex Size B	Largest Diameter C
	Brass	Steel				
1/4	B20-3B	—	1/4	2.49	0.75	0.90
1/4	B20-4B	—	5/16	2.49	0.75	0.90
1/4	B20-5B	—	3/8	2.49	0.75	0.90
3/8	—	24-5B	3/8	2.86	0.88	1.06
3/8	—	24-6B	1/2	3.08	0.88	1.06
1/2	—	16-5B	3/8	3.37	1.00	1.19
1/2	—	16-6B	1/2	3.62	1.00	1.19
1/2	—	16-7B	3/4	3.96	1.00	1.19

### Push-Lok Hose Barb\*

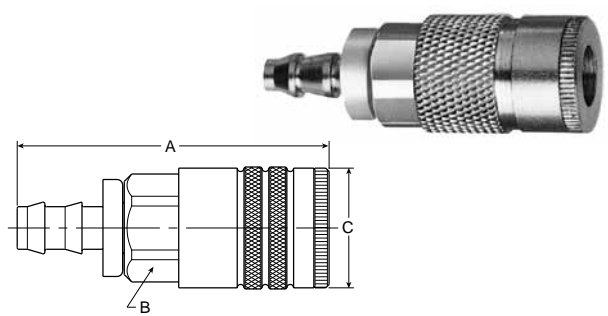

Body Size (Inches)	Part No.		Hose I.D.	Overall Length A	Hex Size B	Largest Diameter C
	Brass	Steel				
1/4	B20-3BP	—	1/4	2.32	0.75	0.90
1/4	B20-5BP	—	3/8	2.47	0.75	0.90
3/8	—	24-5BP	3/8	2.88	0.88	1.06
1/2	—	16-5BP	3/8	3.35	1.00	1.19
1/2	—	16-6BP	1/2	3.46	1.00	1.19

\* Push-Lok hose barbs are designed for use with push-lok hose and do not require clamps.

**NOTE:** To indicate Fluorocarbon seals, add the letter Y as a suffix to the catalog number of the coupler. To indicate Ethylene Propylene seals, add the letter W as a suffix to the catalog number of the coupler.  
 Example: B20-3BY or B20-3BW

### Repair Kits

Body Size	Nitrile	Fluorocarbon	Ethylene Propylene
1/4	21K	21KY	21KW
3/8	14K	—	14KW
1/2	16K	16KY	16KW

**F**



Industrial Interchange Mipples

Sleevmatic Couplers

Safloomatic Couplers

Economomatic Quick Connect Couplers



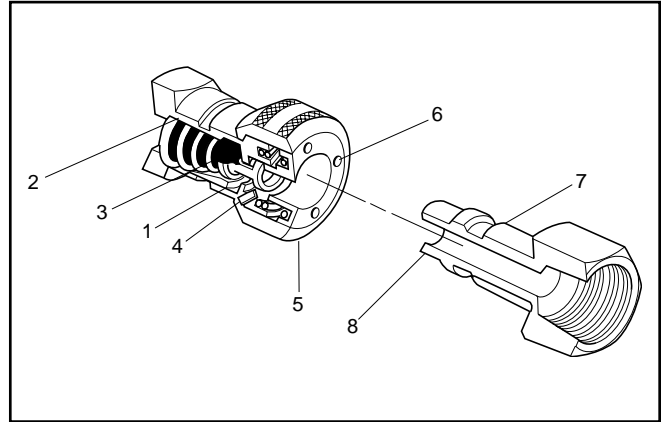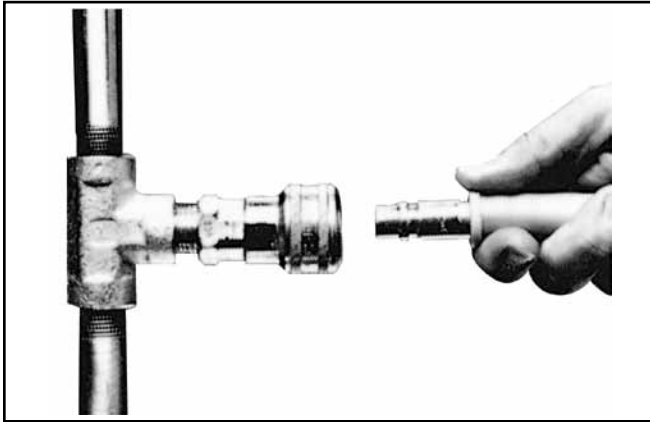

### Operation

Push type couplings feature one-handed “automatic” connection by pushing the nipple into the coupler – provided the coupler half is firmly mounted.

The locking mechanism of Safromatic push type couplers consists of pawls or pins which act directly on the sleeve, thereby causing the sleeve to automatically retract when the mating nipple is inserted. The sleeve must be manually retracted in order to remove the nipple.

Safromatic couplings are push type “single shut off” couplings.

Common applications include compressed air, water, grease, paint, limited vacuum and limited gas.

### Features

1. Safromatic tubular valves with their large flow windows deliver high air flow with minimum pressure drop – for efficient performance of air tools and other actuators. The tubular valve also provides 360 degree seal support to prevent cold flow and bore constriction, thereby extending seal life.

2. Tapered flow recesses in the valve body provide maximum flow capability.
3. Precision molded seals with high quality valve seats for a bubble tight seal that assures reliable sealing within rated working pressures. The Safromatic design with its 360° seal support gives maximum seal retention.
4. Locking pawls are of hardened stainless steel for a durable locking mechanism that provides good alignment and sideload resistance.
5. Push-to-connect design permits one-handed connection when the coupler half is rigidly mounted.
6. Back pressure vent holes allow easier connections especially with liquids.
7. Hardened wear points and solid barstock construction provide long life for these quality couplings. Precision machined surfaces resist the effects of mechanical shocks, even in rugged use.
8. Interchangeability. Safromatic couplers are used with industrial interchange nipples conforming to MIL-C4109.


### Specifications

	Body Size			
	1/4	3/8	1/2	3/4
<b>Rated Pressure (psi)</b>	300	300	300	300
<b>Temperature Range</b>				
Nitrile	-40°F to 250°F			
Ethylene Propylene	-65°F to 400°F			
Fluorocarbon	-30°F to 400°F			
<b>Locking Device</b>	3	4	5	6
	pawls	pawls	pawls	pawls
<b>Vacuum Data (inches Hg)*</b>				
Disconnected (coupler only)	Not recommended			
Connected	27.4	27.4	27.4	27.4

\* Couplings for vacuum service should be 100% tested – an extra cost service. Consult factory.


### Performance

#### Safromatic 1/4" to 3/4"

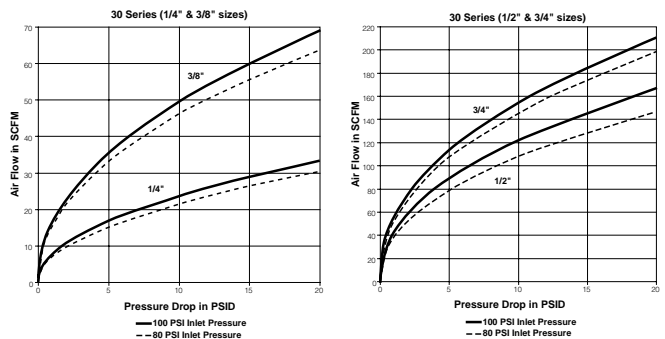




## Female Pipe Thread

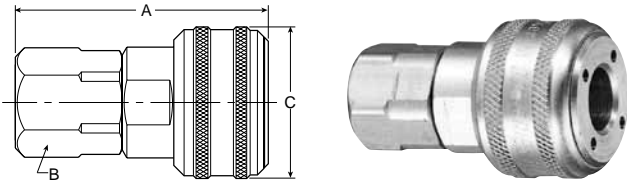


Body Size (Inches)	Part No. Brass	Thread Size	Overall Length A	Hex Size B	Largest Diameter C
1/4	B33A	1/8-27	1.96	0.75	1.20
1/4	B33	1/4-18	1.96	0.75	1.20
1/4	B33E	3/8-18	2.03	0.81	1.20
3/8	B35C	1/4-18	2.26	0.88	1.39
3/8	B35	3/8-18	2.33	0.88	1.39
3/8	B35F	1/2-14	2.57	1.00	1.39
1/2	B37E	3/8-18	2.76	1.00	1.52
1/2	B37	1/2-14	3.00	1.00	1.52
1/2	B37G	3/4-14	3.12	1.25	1.52
3/4	B39F	1/2-14	2.85	1.31	1.90
3/4	B39	3/4-14	2.99	1.31	1.90
3/4	B39J	1-11½	3.18	1.56	1.90

## Standard Hose Barb

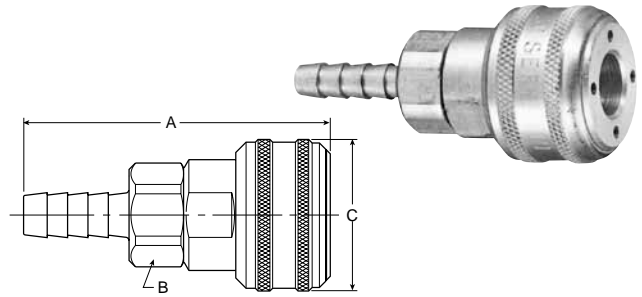

Body Size (Inches)	Part No. Brass	Hose I.D.	Overall Length A	Hex Size B	Largest Diameter C
1/4	B30-3B	1/4	2.62	0.75	1.20
1/4	B30-4B	5/16	2.62	0.75	1.20
1/4	B30-5B	3/8	2.62	0.75	1.20
3/8	B34-5B	3/8	2.85	0.88	1.39
3/8	B34-6B	1/2	2.85	0.88	1.39
1/2	B36-6B	1/2	3.33	1.00	1.52
1/2	B36-7B	3/4	3.86	1.00	1.52
3/4	B38-7B	3/4	3.69	1.31	1.90
3/4	B38-8B	1	3.93	1.31	1.90

## Push-Lok Hose Barb\*

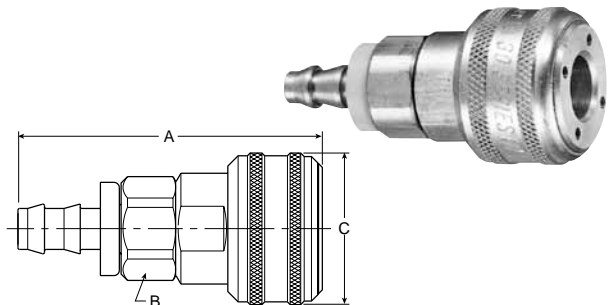


Body Size (Inches)	Part No. Brass	Hose I.D.	Overall Length A	Hex Size B	Largest Diameter C
1/4	B30-3BP	1/4	2.45	0.75	1.20
1/4	B30-5BP	3/8	2.60	0.75	1.20
3/8	B34-5BP	3/8	2.82	0.88	1.39
1/2	B36-6BP	1/2	3.46	1.00	1.52

\* Push-Lok hose barbs are designed for use with push-lok hose and do not require clamps.

**NOTE:** To indicate Fluorocarbon seals, add the letter Y as a suffix to the catalog number of the coupler.  
 Example: B30-3BY

## Male Pipe Thread

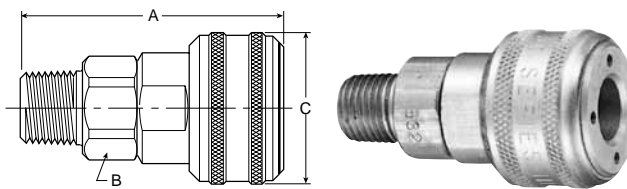

Body Size (Inches)	Part No. Brass	Thread Size	Overall Length A	Hex Size B	Largest Diameter C
1/4	B32A	1/8-27	2.03	0.75	1.20
1/4	B32	1/4-18	2.18	0.75	1.20
1/4	B32E	3/8-18	2.18	0.75	1.20
3/8	B34C	1/4-18	2.38	0.88	1.39
3/8	B34	3/8-18	2.44	0.88	1.39
3/8	B34F	1/2-14	2.57	0.88	1.39
1/2	B36E	3/8-18	2.92	1.00	1.52
1/2	B36	1/2-14	3.09	1.00	1.52
1/2	B36G	3/4-14	3.12	1.13	1.52
3/4	B38	3/4-14	2.95	1.31	1.90
3/4	B38J	1-11-1/2	3.12	1.31	1.90

**NOTE:** To indicate Fluorocarbon seals, add the letter Y as a suffix to the catalog number of the coupler. To indicate Ethylene Propylene seals, add the letter W as a suffix to the catalog number of the coupler.  
 Example: B33AY or B33AW

## Repair Kits

Body Size	Nitrile	Fluorocarbon	Ethylene Propylene
1/4	21K	21KY	21KW
3/8	14K	14KY	14KW
1/2	16K	16KY	16KW
3/4	38K	38KY	38KW

**U**  
 Industrial Interchange Mipples  
 Stevematic Couplers  
 Safromatic Couplers  
 Economat Quick Connect Couplers


**Description**

Economat couplings feature the tubular valve in a coupler body that interchanges with ARO 210 and similar design couplers and nipples. Economat couplings are available only in 1/4" body size, but include 3/8" thread size. Economat couplings have brass bodies with steel sleeves and valves for durability. Standard seal material is Nitrile.

**Specifications**


**Body Size:** 1/4"  
**Rated Pressure:** 300 psi  
**Temperature Range**  
**(Standard Seals):** -40°F to 250°F  
**Locking Device:** 4 balls

**Couplers**  
**Female Pipe Thread**

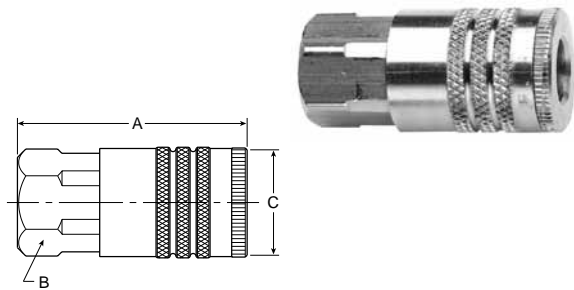

Body Size (Inches)	Part No. Brass	Thread Size	Overall Length A	Hex Size B	Largest Diameter C
1/4	B53	1/4-18 NPTF	1.83	0.75	0.90
1/4	B53E	3/8-18 NPTF	1.95	0.81	0.94


**Couplers**  
**Push-Lok Hose Barb\***

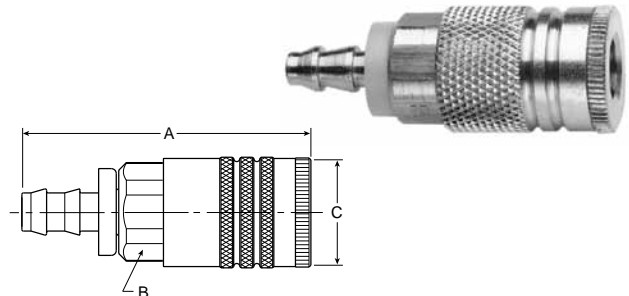

Body Size (Inches)	Part No. Brass	Hose I.D.	Overall Length A	Hex Size B	Largest Diameter C
1/4	B50-03BP	1/4	2.32	0.75	0.90
1/4	B50-05BP	3/8	2.47	0.75	0.90


\* Push-Lok hose barbs are designed for use with push-lok hose and do not require clamps.

**Couplers**  
**Male Pipe Thread**

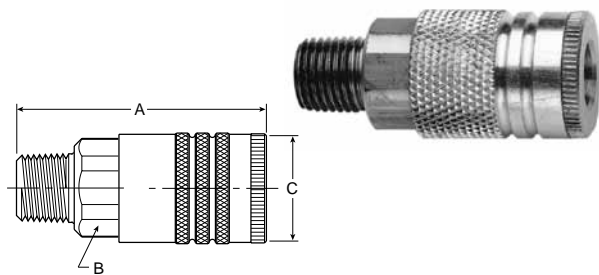

Body Size (Inches)	Part No. Brass	Thread Size	Overall Length A	Hex Size B	Largest Diameter C
1/4	B52	1/4-18	2.05	0.75	0.90
1/4	B52E	3/8-18	2.08	0.75	0.90


**Flow Chart**

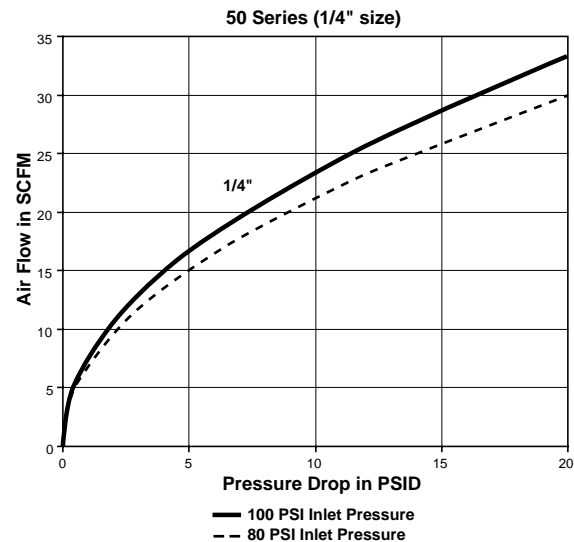

**F**

- Industrial Interchange Nipples
- Slevematic Couplers
- Safloematic Couplers
- Economat Quick Connect Couplers


## Nipples Female Pipe Thread

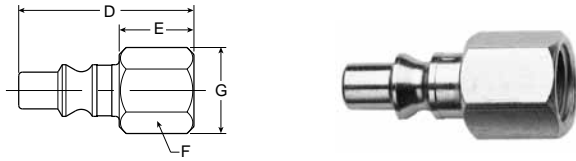

Body Size (Inches)	Part No. Steel	Thread Size	Overall Length D	Exposed Length* E	Hex Size F	Largest Diameter G
1/4	A3C	1/4-18	1.47	0.66	0.62	0.72

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.


## Nipples Standard Hose Barb

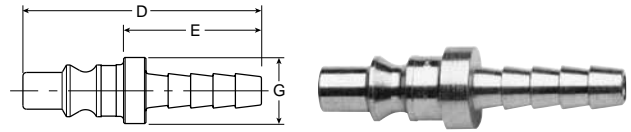

Body Size (Inches)	Part No. Steel	Hose I.D.	Overall Length D	Exposed Length* E	Largest Diameter G
1/4	A8C	1/4	1.63	0.85	0.43

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.


## Nipples Male Pipe Thread

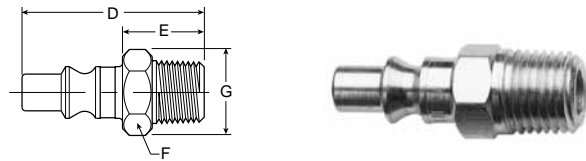

Body Size (Inches)	Part No. Steel	Thread Size	Overall Length D	Exposed Length* E	Hex Size F	Largest Diameter G
1/4	A2C	1/4-18	1.62	0.82	0.56	0.65

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.

## Nipples Push-Lok Hose Barb\*\*

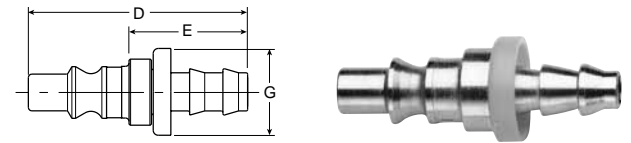

Body Size (Inches)	Part No. Steel	Hose I.D.	Overall Length D	Exposed Length* E	Largest Diameter G
1/4	A8CP	1/4	1.65	0.87	0.43

\* This dimension represents portion of nipple that is exposed when nipple is inserted in coupler.

\*\* Push-Lok barbs are designed for use with push-lok hose and do not require clamps.

**E**  
 Industrial Interchange Nipples  
 Stevematic Couplers  
 Salfomatic Couplers  
 Economatic Quick Connect Couplers

# Hose & Fittings

## Section G



<b>G</b>
General Purpose Hose
Push-on Hose Fittings

General Purpose Hose.....	G2
Push-on Hose Fittings	
Basic Features .....	G3
Part Numbers & Dimensions .....	G4-G6

**Push-on Hose 801 Push-Lok Plus**



The Push-Lok Plus line is the most versatile general purpose hose available. It can be used in numerous applications where low-pressure media is used.

**Features and Benefits**

- Widest fluid compatibility and application range
- Broadest size range (-4 through -16)
- Highest working pressure in all sizes in the industry

**Construction**

- Inner tube: Synthetic Rubber
- Reinforcement: One Fiber Braid
- Cover: Synthetic Rubber, MSHA Accepted

**Temperature**

- Petroleum base hydraulic fluids, lubricating oils, and antifreeze solutions -40°F to +257°F (-40°C to +125°C)
- Water, water / oil emulsion, and water / glycol fluids up to +185°F (+85°C)
- Air up to +158°F (+70°C)

**Water Service**

Water, water/oil emulsion, and water/glycol hydraulic fluids up to +185°F (+85°C). Air up to +158°F (+70°C).

**Fitting Recommendations**


Use only with Push-on Hose Fittings and Quick Couplers with Push-lock Hose Barb.

**Note:** Push-Lok hose is recommended for vacuum applications but not for cooling lines in air conditioners and heat pumps, nor for hydraulic applications where extreme pulsations are encountered. Push-Lok is not recommended for any fuel.

**Nomenclature**

Part numbers are constructed from symbols that identify the style and size of the hose. Numbers identify the hose I.D. in 1/16's of an inch.

**Example:**

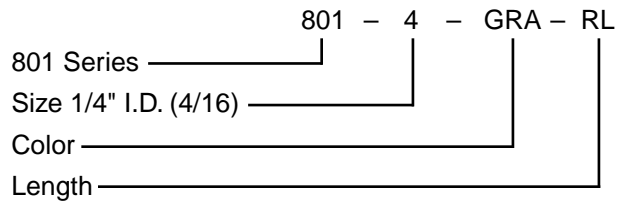

**Note:** 801-10-GRN-RL Not Available

**Available Cover Colors**

- GRA = gray
- RED = red
- YEL = yellow
- BLU = blue
- GRN = green
- BLK = black

**Hose Length**


Hose Type	I.D.	Reel Length*
801-4	1/4"	600 feet
801-6	3/8"	450 feet
801-8	1/2"	300 feet
801-10	5/8"	250 feet
801-12	3/4"	200 feet
801-16	1"	200 feet

\*General reels have no more than 3 lengths per reel, each no less than 20 feet.

**Dimensions & Specifications**

#	Hose I.D.		Hose O.D.		Working Pressure		Burst Pressure		Minimum Bend Radius		Weight		Vacuum Rating	
	Inch	mm	Inch	mm	PSI	MPa	PSI	MPa	Inch	mm	lbs/ft	kg/m	Inches of Hg	kPa
801-4	1/4	6,3	0.50	12,7	350	2.4	1000	6,8	2-1/2	65	0.09	0.13	28	95
801-6	3/8	10	0.63	15,9	350	2.4	1000	6,8	3	75	0.11	0.16	28	95
801-8	1/2	12,5	0.78	19,8	300	2.1	1000	6,8	5	125	0.18	0.27	28	95
801-10	5/8	16	0.91	23,0	300	2.1	1000	6,8	6	150	0.19	0.28	15	51
801-12	3/4	19	1.03	26,2	300	2.1	1000	6,8	7	180	0.24	0.36	15	51
801-16	1	25	1.28	32,6	200	1.4	700	4,8	10	250	0.37	0.55	15	51

**Basic Features**

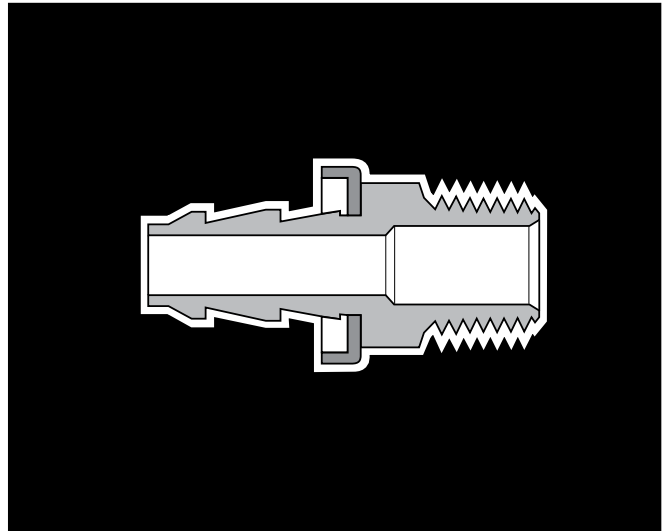

**Advantages**

Push-on Hose Fittings are machined from the highest quality brass or stainless steel. The barbs are specifically engineered to work in conjunction with the I.D. and braid angle of Push-on Hose, ensuring a tight connection **without clamps**.

**Assembly**

Push-on Hose Fittings are designed only for use with Push-on Hose. Do not use with any other style or manufacturer of hose.

**Assembly Instructions:**

1. Cut hose cleanly and squarely to length.
2. Lubricate hose I.D. and barbs with light oil or soapy water.
3. Push the hose onto the fitting until it bottoms against the yellow stop ring. This ensures that all of the barbs are engaged with the hose and will also help keep the end of the hose from fraying.
4. **⚠ CAUTION: Use of clamps may damage sealing integrity of Hose and Fitting Assembly.**

**Temperature Range**

-40°F to 180°F (-40°C to 82°C)

Limited by media through hose assembly.


**Pressure Range**

Limited by hose I.D.

**Nomenclature**

Part numbers are constructed from symbols that identify the style, size and material of the fitting.

**Example:**

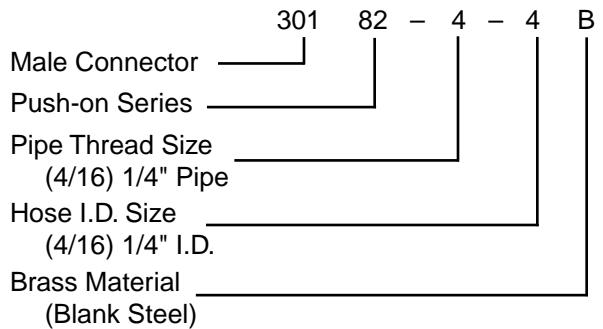


**G**

General Purpose Hose

Push-on Hose Fittings


**30182 Push-on Hose Barb to Male Pipe**

#	Thread		Hose Size		A		H	B	
	Inch		Inch		Inch	mm		Inch	mm
30182-2-4B	1/8 x 27	-2	1/4	-4	1.39	35	7/16	.64	16
30182-4-4B	1/4 x 18	-4	1/4	-4	1.57	40	9/16	.82	21
30182-4-6B	1/4 x 18	-4	3/8	-4	1.78	45	9/16	.88	22
30182-6-6B	3/8 x 18	-6	3/8	-6	1.78	45	11/16	.88	22
30182-8-6B	1/2 x 14	-8	3/8	-6	2.03	52	7/8	1.13	29
30182-6-8B	3/8 x 18	-6	1/2	-8	1.93	49	11/16	.88	22
30182-8-8B	1/2 x 14	-8	1/2	-8	2.18	55	7/8	1.13	29
30182-8-10B	1/2 x 14	-8	5/8	-10	2.58	66	7/8	1.13	29
30182-12-8B	3/4 x 14	-12	1/2	-8	2.21	56	1-1/16	1.16	29
30182-12-12B	3/4 x 14	-12	3/4	-12	2.61	66	1-1/16	1.16	29

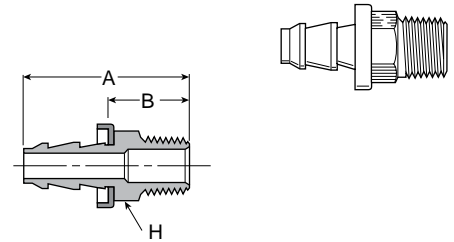


**30282 Push-on Hose Barb to Female Pipe**

#	Thread		Hose Size		A		H	B	
	Inch		Inch		Inch	mm		Inch	mm
30282-4-4B	1/4 x 18	-4	1/4	-4	1.56	40	3/4	.81	21
30282-6-6B	3/8 x 18	-6	3/8	-6	1.82	46	7/8	.92	23
30282-8-8B	1/2 x 14	-8	1/2	-8	2.16	55	1-1/16	1.11	28

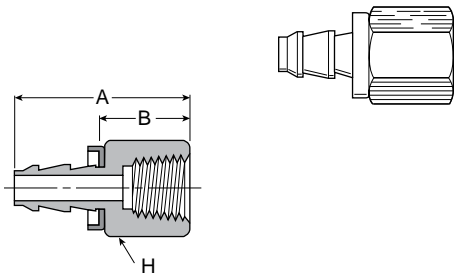

**30482 Push-on Hose Barb to Male SAE 45°**

#	Thread		Hose Size		A		H	B		
	Inch		Inch		Inch	mm		Inch	mm	
30482-4-4B	1/4	7/16 x 20	-4	1/4	-4	1.51	38	7/16	0.76	19
30482-5-4B	5/16	1/2 x 20	-5	1/4	-4	1.61	41	9/16	0.86	22
30482-6-6B	3/8	5/8 x 18	-6	3/8	-6	1.84	47	5/8	0.94	24
30482-8-8B	1/2	3/4 x 16	-8	1/2	-8	2.15	55	3/4	1.1	28

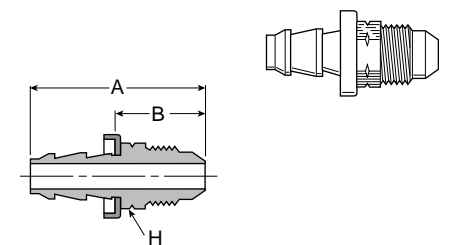

**G**


General Purpose Hose  
 Push-on Hose Fittings



**30682 Push-on Hose Barb to Female SAE JIC 37° Swivel**


# Part No.	Thread			Hose Size		A		H	B	
	Inch	Inch	Inch	Inch	Inch	Inch	mm	Inch	Inch	mm
30682-4-4B	1/4	7/16 x 20	-4	1/4	-4	1.52	39	9/16	0.77	20
30682-5-4B	5/16	1/2 x 12	-5	1/4	-4	1.58	40	5/8	0.83	21
30682-6-6B	3/8	9/16 x 18	-6	1/4	-4	1.61	41	11-16	0.86	22
30682-8-6B*	1/2	3/4 x 16	-8	3/8	-6	1.87	47	7/8	0.97	25
30682-8-8B	1/2	3/4 x 16	-8	1/2	-8	2.02	51	7/8	0.97	25
30682-10-8B*	5/8	7/8 x 14	-10	1/2	-8	2.14	54	1	1.09	28
30682-10-10B	5/8	7/8 x 14	-10	5/8	-10	2.54	65	1	1.09	28
30682-12-12B	3/4	1-1/16 x 12	-12	3/4	-12	2.65	67	1-1/4	1.2	30

\*Also connects to SAE 45°

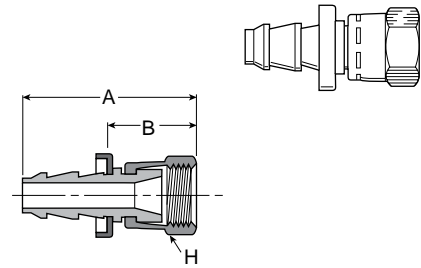

**30882 Push-on Hose Barb to Female SAE 45° Swivel**

# Part No.	Thread			Hose Size		A		H	B	
	Inch	Inch	Inch	Inch	Inch	Inch	mm	Inch	Inch	mm
30882-4-4B	1/4	7/16 x 20	-4	1/4	-4	1.52	39	9/16	0.76	19
30882-5-4B	5/16	1/2 x 20	-5	1/4	-4	1.58	40	5/8	0.83	21
30882-6-6B	3/8	5/8 x 18	-6	3/8	-6	1.81	46	3/4	0.91	23
30882-8-8B	1/2	3/4 x 16	-8	1/2	-8	2.02	51	7/8	0.97	25
30882-10-10B	5/8	7/8 x 14	-10	5/8	-10	2.54	65	1	1.09	28
30882-12-12B	3/4	1-1/16 x 14	-12	3/4	-12	2.65	67	1-1/4	1.19	30

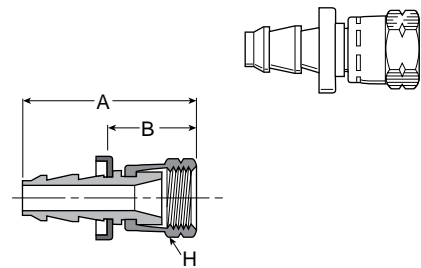

**G**


General Purpose  
Hose

Push-on  
Hose Fittings

**31382 Push-on Hose Barb to Male Pipe Swivel**


# Part No.	Thread		Hose Size		A		H	B	
	Inch	Inch	Inch	Inch	Inch	mm	Inch	Inch	mm
31382-4-4	1/4 x 18	-4	1/4	-4	1.6	41	9/16	.85	22
31382-6-6	3/8 x 18	-6	3/8	-6	1.79	45	11/16	.89	23
31382-8-8*	1/2 x 14	-8	1/2	-8	2.2	56	7/8	1.15	29

\* Steel

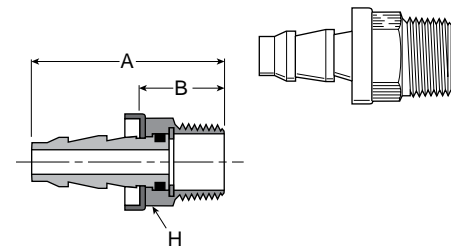


**37G82 Push-on Hose Barb to Female Pipe (NPSM)  
 Swivel with Gasket**

# Part No.	Gasket	Thread		Hose Size		A		H Inch	B	
		Inch	-	Inch	-	Inch	mm		Inch	mm
37G82-4-4	07G-4	1/4- 18	-4	1/4	-4	1.55	39	11/16	0.80	20
37G82-4-6	07G-4	1/4- 18	-4	3/8	-6	1.7	43	11/16	0.80	20
37G82-6-6	07G-6	3/8- 18	-6	3/8	-6	1.75	44	7/8	0.85	22
37G82-8-8	07G-8	1/2- 14	-8	1/2	-8	2.07	53	1	1.02	26
37G82-8-10	07G-8	1/2- 14	-8	5/8	-10	2.47	63	1	1.02	26
37G82-12-12	07G-12	3/4- 14	-12	3/4	-12	2.54	65	1-1/4	1.09	28

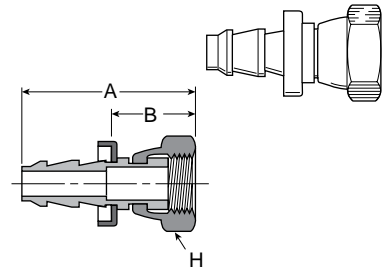

**38282 Push-on Hose Barb Union**

# Part No.	Hose Size		A	
	Inch	-	Inch	mm
38282-4-4B	1/4	-4	1.80	46
38282-6-6B	3/8	-6	2.15	55
38282-8-8B	1/2	-8	2.51	64

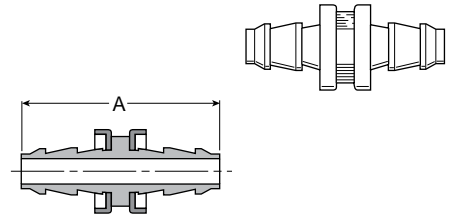


**G**

General Purpose Hose

Push-on Hose Fittings

# Tubing & Fittings

## Section H

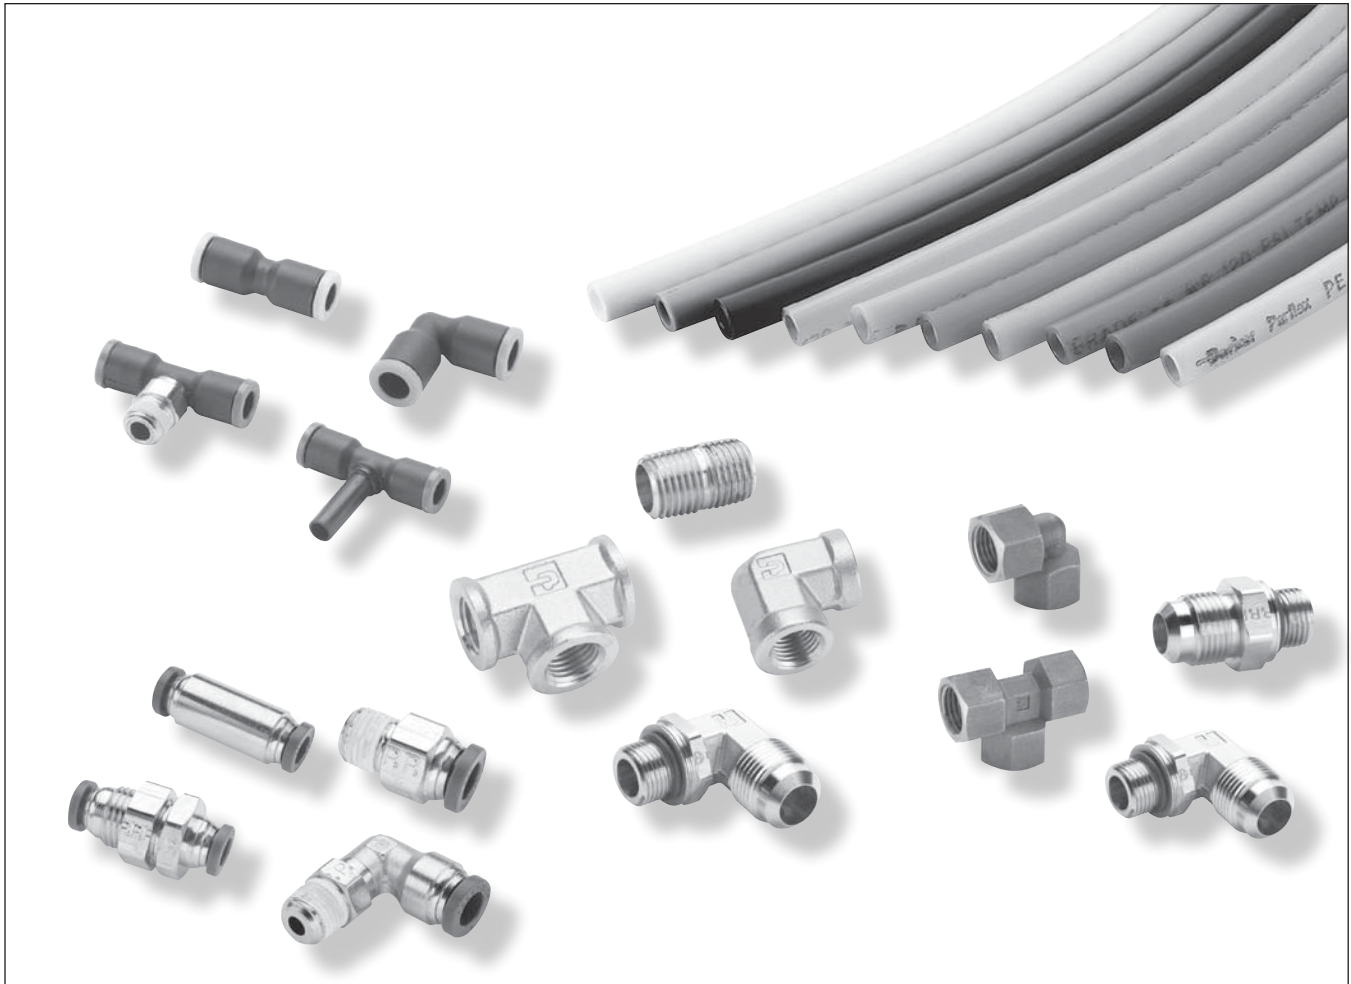

Polyethylene Tubing.....	H2-H3
Nylon Tubing.....	H4-H5
Polyurethane Tubing.....	H6
Push-to-Connect, Prestolok Composite Fittings.....	H8-H25
Prestolok Metal Fittings.....	H26-H37
Pipe Fittings.....	H38-H43
Metric Adapters.....	H44-H45

**H**

Tubing

Prestolok  
Composite

Prestolok  
Metal

Pipe Fittings  
& Adapters

## Advantages

Chemical resistant, flexible, low cost, eight colors, five tube sizes and choice of reel lengths.

## Construction

Flexible polyethylene thermoplastic tubing is extruded from high molecular weight resin for increased dimensional stability, uniformity and long-term strength. Its resistance to environmental stress cracking greatly exceeds that of ordinary polyethylene tubing as measured by ASTM D-1693, (10% IGEPAL).

## Applications & Approvals

Polyethylene tubing is available in black as well as seven coding colors as recommended by the Instrument Society of America. Black (EB) tubing contains an ultra-violet inhibitor which is recommended for use in sunlit areas. Ingredients of natural and color tubing (except black) listed below meet FDA requirements for food contact applications. All tubing conforms to ASTM D-1248, Type I, Class A, Category 4, Grade E5.

## Temperature Range

Suggested operating temperature range is -80°F to 150°F (-62°C to 66°C).

## Fitting Recommendation

- Brass fittings

## Nomenclature

Part numbers are constructed from symbols that identify the style and size of the fitting. Letters identify style and material. Numbers identify size in 1/16's of an inch.


### Example:

E - 6 4 - Y - 0500

Polyethylene ———┐  
 3/8" (6/16) Tube O.D. ┘  
 1/4" (4/16) Tube I.D. ———┐  
 Color, Yellow —————┘  
 Reel Footage —————┐  
 —————┘

## E Instrument Grade Tubing

Part Number	Color	O.D.	I.D.	Wall	Reel Length Feet	Working Pressure psi at 73°F	Min. Burst psi at 73°F	Min. Bend Radius Inches	Weight Per 100 Feet
E-43-0100	Natural	1/4	.170	.040	100	120	625	1	1.1
E-43-0500	Natural	1/4	.170	.040	500	120	625	1	1.1
E-43-1000	Natural	1/4	.170	.040	1000	120	625	1	1.1
EB-43-0100	Black	1/4	.170	.040	100	120	625	1	1.1
EB-43-0500	Black	1/4	.170	.040	500	120	625	1	1.1
EB-43-1000	Black	1/4	.170	.040	1000	120	625	1	1.1
E-43-R-0100	Red	1/4	.170	.040	100	120	625	1	1.1
E-43-R-0500	Red	1/4	.170	.040	500	120	625	1	1.1
E-43-B-0100	Blue	1/4	.170	.040	100	120	625	1	1.1
E-43-B-0500	Blue	1/4	.170	.040	500	120	625	1	1.1
E-43-O-0500	Orange	1/4	.170	.040	500	120	625	1	1.1
E-43-Y-0500	Yellow	1/4	.170	.040	500	120	625	1	1.1
E-43-P-0500	Purple	1/4	.170	.040	500	120	625	1	1.1
E-43-G-0500	Green	1/4	.170	.040	500	120	625	1	1.1
E-53-0500	Natural	5/16	.187	.062	500	145	800	1-1/8	2.1
EB-53-0500	Black	5/16	.187	.062	500	145	800	1-1/8	2.1
E-64-0100	Natural	3/8	.250	.062	100	125	675	1-1/4	2.5
E-64-0500	Natural	3/8	.250	.062	500	125	675	1-1/4	2.5
EB-64-0100	Black	3/8	.250	.062	100	125	675	1-1/4	2.5
EB-64-0500	Black	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-R-0500	Red	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-B-0500	Blue	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-O-0500	Orange	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-Y-0500	Yellow	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-P-0500	Purple	3/8	.250	.062	500	125	675	1-1/4	2.5
E-64-G-0500	Green	3/8	.250	.062	500	125	675	1-1/4	2.5
E-86-0100	Natural	1/2	.375	.062	100	90	425	2-1/2	3.6
EB-86-0100	Black	1/2	.375	.062	100	90	425	2-1/2	3.6
E-108-0100	Natural	5/8	.500	.062	100	70	325	4	4.6
EB-108-0100	Black	5/8	.500	.062	Coil	70	325	4	4.6

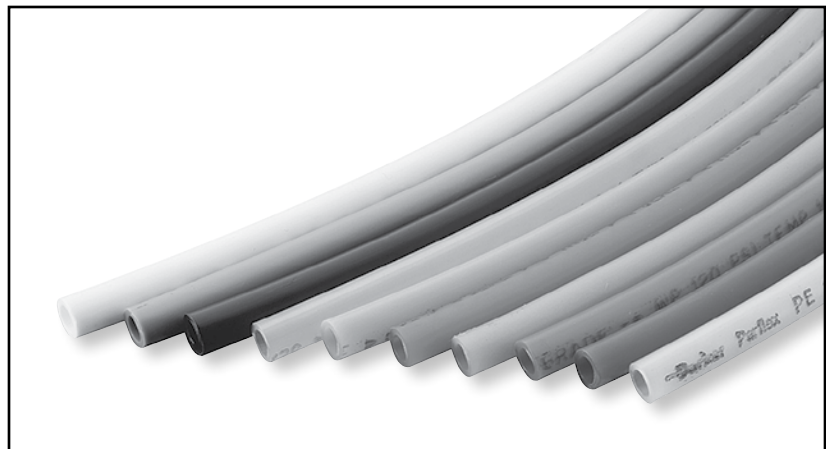

**H**

Tubing

Prestolok Composite

Prestolok Metal

Pipe Fittings & Adapters



### PEFR Flame Resistant Tubing

Part Number	Color	O.D.	I.D.	Wall	Reel Length Feet	Working Pressure psi at 73°F	Min. Burst psi at 73°F	Min. Bend Radius Inches	Weight Per 100 Feet
PEFR-2.5-0500	Black	5/32	.096	.030	500	225	900	1/2	.56
PEFR-4-0500	Black	1/4	.170	.040	500	160	650	3/4	1.24
PEFR-4-1000	Black	1/4	.170	.040	1000	160	650	3/4	1.24
PEFR-6-0500	Black	3/8	.250	.062	500	195	780	1-1/2	2.90
PEFR-8-0250	Black	1/2	.375	.062	250	135	540	1-3/4	4.05

### Construction & Approvals

Flame resistant polyethylene is manufactured from a distinctively formulated compound which meets the UL94 V-2 flame classification. It also meets the flame spread, fuel contribution and smoke density requirements of the ASTM E84-81a tunnel test.

### Applications

Parker series PEFR tubing is the preferred product for pneumatic control applications in the heating - ventilating - air conditioning - energy conservation industry. It is also suitable for use in petrochemical plants, petroleum refineries, pulp and paper mills, mines, steel mills and other industries where protection against intermittent flame and hot sparks is necessary.

### Temperature Range

Suggested operating temperature range is -85°F to 150°F (-65°C to +66°C).

### Nomenclature

Order by tubing part number and name.

**Example:**

PE FR 4 - 0500

Polyethylene \_\_\_\_\_

Flame Resistant \_\_\_\_\_

1/4" (4/16) Tube O. D. \_\_\_\_\_

Reel Footage \_\_\_\_\_

H

Tubing

Presolok Composite

Prestolok Metal

Pipe Fittings & Adapters



## N Flexible Tubing

Nylon Part No.	Color	Nom. Tube O.D.	Nom. Tube I.D.	Average Wall Thick.	*Min. Burst Pressure at 73°F psi	Min. Bend Radius Inches	Std. Reel Length Feet
NN-2-016	Natural	1/8	.093	.016	1000	1/4	250
NB-2-016	Black	1/8	.093	.016	1000	1/4	250
NN-2-031	Natural	1/8	.064	.031	2000	1/4	250
NB-2-031	Black	1/8	.064	.031	2000	1/4	250
NN-2.5-025	Natural	5/32	.106	.025	1200	1/2	250
NB-2.5-025	Black	5/32	.106	.025	1200	1/2	250
NN-3-025	Natural	3/16	.138	.025	1000	5/8	250
NB-3-025	Black	3/16	.138	.025	1000	5/8	250
NN-3-046	Natural	3/16	.096	.046	2000	7/16	250
NB-3-046	Black	3/16	.096	.046	2000	7/16	250
NN-4-035	Natural	1/4	.180	.035	1000	7/8	250
NB-4-035	Black	1/4	.180	.035	1000	7/8	250
NN-4-040	Natural	1/4	.170	.040	1250	7/8	250
NB-4-040	Black	1/4	.170	.040	1250	7/8	250
NN-4-062	Natural	1/4	.127	.062	2000	1/2	250
NB-4-062	Black	1/4	.127	.062	2000	1/2	250
NN-5-040	Natural	5/16	.233	.040	1250	1-1/8	250
NB-5-040	Black	5/16	.233	.049	1250	1-1/8	250
NN-6-050	Natural	3/8	.275	.050	1250	1-1/8	250
NB-6-050	Black	3/8	.275	.050	1250	1-1/8	250
NN-6-093	Natural	3/8	.190	.093	2000	3/4	250
NB-6-093	Black	3/8	.190	.093	2000	3/4	250
NN-8-062	Natural	1/2	.375	.062	1000	1-1/4	250
NB-8-062	Black	1/2	.375	.062	1000	1-1/4	250
NN-8-124	Natural	1/2	.253	.124	2000	1	250
NB-8-124	Black	1/2	.253	.124	2000	1	250

\*Suggested working pressure is 1/4 of burst pressure.

### Advantages

Flexible nylon tubing is carefully made from high-grade, abrasion-resistant, heat- and light-stabilized nylon. Resistance to stress-cracking greatly exceeds that of ordinary nylon tubing. Extremely low level water absorption.

Chemical-resistant nylon tubing has the additional benefits of better flexibility, lighter weight and resistance to flexural fatigue.

### Colors

Available in natural (NN) and black (NB). Black tubing is recommended for use outdoors and in sunlit areas.

### Temperature Range


Operating temperatures, depending upon conditions, are -65°F to 200°F (-54°C to 93°C) continuous.

### Fitting Recommendations

- Brass fittings

### Nomenclature

Order by tubing part number and name.

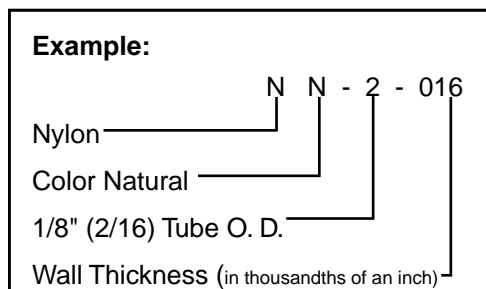

H

Tubing

Prestolok Composite

Prestolok Metal

Pipe Fittings & Adapters



## NR Semi-rigid High Strength Tubing

Nylon Part No.	Color	Nom. Tube O.D.	Nom. Tube I.D.	Average Wall Thick.	*Min. Burst Pressure at 73°F psi	Min. Bend Radius Inches	Std. Reel Length Feet
NNR-2-017	Natural	1/8	.091	.017	1700	1/2	500
NBR-2-017	Black	1/8	.091	.017	1700	1/2	500
NNR-2-026	Natural	1/8	.073	.026	2500	3/8	500
NBR-2-026	Black	1/8	.073	.026	2500	3/8	500
NNR-3-024	Natural	3/16	.140	.024	1700	3/4	500
NBR-3-024	Black	3/16	.140	.024	1700	3/4	500
NNR-3-039	Natural	3/16	.110	.039	2500	5/8	500
NBR-3-039	Black	3/16	.110	.039	2500	5/8	500
NNR-4-035	Natural	1/4	.180	.035	1700	1	250
NBR-4-035	Black	1/4	.180	.035	1700	1	250
NNR-4-050	Natural	1/4	.150	.050	2500	7/8	250
NBR-4-050	Black	1/4	.150	.050	2500	7/8	250
NNR-5-040	Natural	5/16	.233	.040	1700	1-1/2	250
NBR-5-040	Black	5/16	.233	.040	1700	1-1/2	250
NNR-6-048	Natural	3/8	.279	.048	1700	1-3/4	250
NBR-6-048	Black	3/8	.279	.048	1700	1-3/4	250
NNR-6-075	Natural	3/8	.225	.075	2500	1-1/2	250
NBR-6-075	Black	3/8	.225	.075	2500	1-1/2	250
NNR-8-062	Natural	1/2	.376	.062	1500	2-3/8	250
NBR-8-062	Black	1/2	.376	.062	1500	2-3/8	250
NNR-8-075	Natural	1/2	.350	.075	2200	2-1/2	250
NBR-8-075	Black	1/2	.350	.075	2200	2-1/2	250

\*Suggested working pressure is 1/4 of burst pressure.

### Advantages

Series NR semi-rigid nylon tubing offers better chemical resistance than series N, good resistance to high ambient temperature and low moisture absorption. NR has a high tensile strength which will give excellent coupling retention in high pressure, temperature and vibration environments.

### Construction

Parker series NR tubing is manufactured from a semi-rigid nylon II material. The tubing does not contain plasticizers.

### Applications & Approvals

NR tubing is specified for machine tool lubricating systems, marine control systems, process lines for chemicals and oils and other applications requiring a high quality nylon tube.

### Temperature Range


The recommended operating temperature range for service at rated pressures with compatible fluids is -60°F to 200°F (-51°C to 93°C).

### Fitting Recommendations

- Brass fittings

### Nomenclature

Order by tubing part number and name.

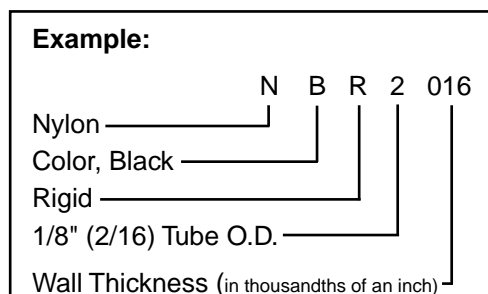

## PTC Plastic Tube Cutter


### Part No. PTC-001

An easy to handle razor/edged tube cutter, closes automatically, assuring clean and square cuts.


May be used with polyethylene, polypropylene, nylon and other plastic tubing.

#### How To Use

Insert plastic tube to desired length, allow tube cutter to close, then apply pressure until tube snaps off.





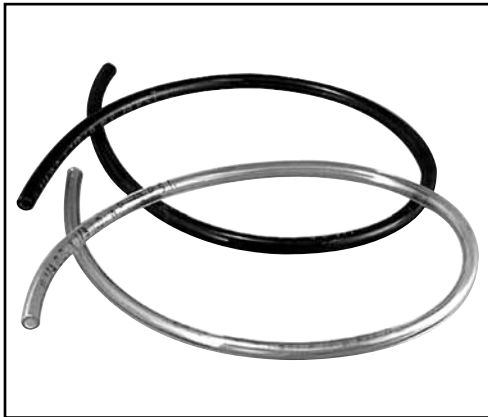

### Fitting Recommendations

- Thermoplastic fittings
- Brass fittings

### Nomenclature

Order by tubing part number and name.

**Example:**

U - 2 1 - BLK - 0250

Polyurethane ——— |

1/8" (2/16) Tube O.D. |

1/6" (1/16) Tube I.D. |

Color - Black ——— |

Reel Length in Feet ——— |

### Advantages

Polyurethane tubing is a high quality, precision-made tubing used in a wide range of demanding and critical applications.

Polyether based, polyurethane tubing occupies a unique position among polymers, sharing the best properties of both rubber and plastic. Urethane exhibits the elongation and recovery characteristics of rubber and the chemical resistance associated with plastics. The tubing is tough, strong, kink-resistant and abrasion resistant, yet it's flexible and easy to assemble onto designated fittings.

- Tough
- Flexible
- Broad Temperature Range
- Eight Colors
- Abrasion Resistant
- Chemical Resistant

### Applications & Approvals

Polyurethane tubing is used for a wide variety of applications. Typical usage includes air tools, robotics, pneumatic logic and actuation systems, analytical instrumentation, vacuum equipment, pressure measurement apparatus, semiconductor equipment manufacturers and a variety of medical and laboratory applications.

### Temperature Range

Suggested operating temperatures, depending upon conditions are 0°F to 200°F (-18°C to 93°C).

### U Polyether Base Tubing

Part No.*	Nom. Tube O.D.	Nom. Tube I.D.	Wall Thick.	Working** Pressure (PSI)	Burst Pressure (PSI)	Reel Length Feet
U-21-xxx-0500	1/8	1/16	1/32	125	375	500
U-21-xxx-0250						250
U-42-xxx-0500	1/4	1/8	1/16	125	375	500
U-42-xxx-0250						250
U-64-xxx-0250	3/8	1/4	1/16	125	375	250
U-64-xxx-0100						100 (coil)
U-86-xxx-0250	1/2	3/8	1/16	85	255	250
U-86-xxx-0100						100 (coil)

\* xxx = Colors: Clear-Blank, Black-BLK, Green-GRN, Red-RED, Yellow-YEL, Blue-BLU, Orange-ORG, Gray-GRA

\*\* Based on a full 4:1 safety factor.

H

Tubing

Prestolok Composite

Prestolok Metal

Pipe Fittings & Adapters

**Notes**

---

**H**

Tubing






































PrestoLok  
Composite

PrestoLok  
Metal

Pipe Fittings  
& Adapters

<b>Tube to Male NPTF</b>	<b>W369PLP</b> Male Elbow  Page H11	<b>W369PLPX</b> Extended Male Elbow  Page H12	<b>W379PLP</b> Male Elbow 45°  Page H12	<b>W372PLP</b> Branch Tee Swivel  Page H13	<b>W371PLP</b> Male Run Tee Swivel  Page H14	
	<b>W68PLPSP</b> Male Standpipe  Page H15	<b>W368PLP</b> Male Y Connector  Page H15	<b>Tube to Tube</b>	<b>32PLP</b> Equal Union  Page H17	<b>365PLP</b> Union Elbow  Page H17	<b>364PLP</b> Union Tee  Page H16
	<b>362PLP</b> Union Y Connector  Page H16	<b>362PLPD</b> Double Y Connector  Page H19		<b>24PLP</b> Multiple Tee  Page H19	<b>24PLPD</b> Double Multiple Tee  Page H20	<b>347PLP</b> Equal Cross  Page H20
	<b>32PLPDRC</b> Connector for 3 Tubes  Page H24	<b>Tube to Female NPTF</b>	<b>377PLP</b> Female Branch Tee Swivel  Page H13	<b>370PLP</b> Female Elbow Swivel  Page H16		
<b>Bulkhead Unions</b>	<b>32PLPBH</b> Bulkhead Union  Page H19		<b>365PLPBH</b> Equal Bulkhead Elbow  Page H19	<b>Plug-Ins</b>	<b>369PLPSP</b> Plug-In Elbow  Page H20	<b>369PLPSPX</b> Extended Plug-In Elbow  Page H21
	<b>379PLPSP</b> 45° Plug-In Elbow  Page H21	<b>372PLPSP</b> Plug-In Branch Tee  Page H21	<b>371PLPSP</b> Plug-In Run Tee  Page H21		<b>362PLPSP</b> Plug-In Y  Page H22	<b>67PLP</b> Tube End Reducer  Page H23
<b>Metric Tube to Male NPTF</b>	<b>322PLPSP</b> Barbed Connector  Page H24	<b>Auxiliary Components</b>	<b>63PLP</b> Double Male Union  Page H22	<b>639PLP</b> Plug  Page H24		
	<b>W369PLP</b> Male Elbow  Page H11		<b>W372PLP</b> Male Branch Tee Swivel  Page H13			

<b>H</b>
Tubing
Prestolok Composite
Prestolok Metal
Pipe Fittings & Adapters

<b>Metric Tube to Metric Tube</b>	<b>32PLP</b> Union  Page H17	<b>365PLP</b> Union Elbow  Page H17	<b>364PLP</b> Union Tee  Page H18	<b>362PLP</b> Union Y Connector  Page H22	<b>362PLPD</b> Double Y Connector  Page H19
	<b>24PLP</b> Multiple Tee  Page H19	<b>24PLPD</b> Double Multiple Tee  Page H20	<b>347PLP</b> Cross  Page H20	<b>32PLPRC</b> Connector for 2 Tubes  Page H24	<b>32PLPDRC</b> Connector for 3 Tubes  Page H24
<b>Metric Bulkhead Unions</b>	<b>32PLPBH</b> Bulkhead Union  Page H19	<b>365PLPBH</b> Equal Bulkhead Elbow  Page H19	<b>Metric Tube to Female BSPP</b>	<b>370PLP</b> Female Elbow  Page H16	
	<b>369PLP</b> Male Elbow  Page H11	<b>369PLPX</b> Male Elbow  Page H12		<b>379PLP</b> 45° Male Elbow  Page H12	<b>372PLP</b> Male Branch Tee  Page H13
<b>68PLPSP</b> Male Standpipe  Page H15	<b>368PLP</b> Male Y Connector  Page H15	<b>368PLPD</b> Double Y Male Connector  Page H16	<b>Metric Tube to Metric Straight Thread</b>	<b>369PLP</b> Male Elbow  Page H11	<b>369PLPX</b> Male Elbow  Page H12
<b>379PLP</b> 45° Male Elbow  Page H12	<b>372PLP</b> Male Branch Tee  Page H13	<b>371PLP</b> Male Run Tee  Page H14		<b>68PLPSP</b> Male Standpipe  Page H15	<b>368PLP</b> Male Y Connector  Page H15
<b>Metric Plug-Ins</b>	<b>369PLPSP</b> Plug-In Elbow  Page H20	<b>369PLPXSP</b> Extended Plug-In Elbow  Page H21	<b>379PLPSP</b> 45° Plug-In Elbow  Page H21	<b>372PLPSP</b> Plug-In Branch Tee  Page H21	<b>371PLPSP</b> Plug-In Run Tee  Page H22
	<b>362PLPSP</b> Plug-In Y  Page H22	<b>362PLPDSP</b> Plug-In Multiple Y  Page H22	<b>67PLP</b> Tube End Reducer  Page H23	<b>32PLPSP</b> Tube Expander  Page H23	<b>322PLPSP</b> Barbed Connector  Page H24

<b>H</b>
Tubing
Prestolok Composite
Prestolok Metal
Pipe Fittings & Adapters

**Features**

MATERIALS OF CONSTRUCTION	
Body:	Glass reinforced nylon 6.6
Collar:	Nylon
Gripping Ring:	Stainless Steel
D Seal:	Nitrile
O-Rings:	Nitrile
Base:	Nickel plated brass with thread sealant on tapered components and captive seal on parallel threads.

NOMENCLATURE	
EXAMPLE: W369PLP-4-2	ATTRIBUTE:
w	White Thread Sealant
3	composite body
69	male elbow
PLP	Prestolok
4	1/4" (4/16) Tube O.D.
2	1/8" (2/16) Pipe Thread

PRESSURE AND TEMPERATURE RANGE	
Gripping Ring:	-4°F to +175°F at up to 290 PSI depending on tubing
Collet Technology:	+5°F to +155°F at up to 260 PSI depending on tubing
Vacuum Capability:	28" Hg

APPLICABLE TUBE	
Tube O.D.:	1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 1/2
Tube O.D. (mm):	3, 4, 6, 8, 10, 12, 14



A compact one piece push-to-connect fitting. All items in the Prestolok composite range are silicone free. The stainless steel gripping ring ensures excellent tube retention while the D seal within the fitting provides a positive seal on the O.D. of the tube, in both static and dynamic positions, due to an optimized design of the fitting cavity. Prestolok composite should not be used for live swivel applications.

**Recommended Tubing**

Prestolok composite fittings are designed to be used with the following tubing.

- Nylon Semi-Rigid
- Polyurethane
- Nylon
- Fluoropolymer

**Assembly Instructions**

1. Achieve a square cut edge with a tube cutter
2. Simply push the tubing until it can go no further. Holding and sealing is accomplished instantaneously.
3. Pull on the tubing to verify gripping action
4. To disassemble make sure there is no air flow
5. Depress the manual push button, then pull the tube out.


H

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters



**W369PLP Male Elbow Swivel 90°**


Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	L	H
369PLP-2-0	1/8	10-32	8	0.57	0.52
W369PLP-2-1	1/8	1/16	10	0.57	0.53
W369PLP-2-2	1/8	1/8	11	0.57	0.53
W369PLP-2-4	1/8	1/4	14	0.57	0.55
369PLP-5/32-0	5/32	10-32	8	0.55	0.53
W369PLP-5/32-2	5/32	1/8	11	0.55	0.53
W369PLP-5/32-4	5/32	1/4	14	0.55	0.55
W369PLP-3-2	3/16	1/8	11	0.85	0.67
369PLP-4-0	1/4	10-32	11	0.71	0.63
W369PLP-4-2	1/4	1/8	11	0.71	0.67
W369PLP-4-4	1/4	1/4	14	0.71	0.63
W369PLP-4-6	1/4	3/8	18	0.71	0.65
W369PLP-5-2	5/16	1/8	11	0.91	0.75
W369PLP-5-4	5/16	1/4	14	0.91	0.71
W369PLP-5-6	5/16	3/8	18	0.91	0.73
W369PLP-6-2	3/8	1/8	15	1.08	0.91
W369PLP-6-4	3/8	1/4	15	1.08	0.91
W369PLP-6-6	3/8	3/8	18	1.08	0.87
W369PLP-6-8	3/8	1/2	22	1.08	0.91
W369PLP-8-4	1/2	1/4	20	1.38	1.22
W369PLP-8-6	1/2	3/8	20	1.38	1.22
W369PLP-8-8	1/2	1/2	24	1.38	1.12



**W369PLP Male Elbow**

Part No.	Tube Size (mm)	Thread NPT	C Hex (mm)	H	L
W369PLP-4M-2	4	1/8	11	0.5	0.6
W369PLP-4M-4	4	1/4	14	0.6	0.6
W369PLP-6M-2	6	1/8	11	0.6	0.6
W369PLP-6M-4	6	1/4	14	0.6	0.6
W369PLP-8M-2	8	1/8	11	0.8	0.9
W369PLP-8M-4	8	1/4	14	0.7	0.9
W369PLP-8M-6	8	3/8	18	0.7	0.9
W369PLP-10M-4	10	1/4	15	0.9	1.0
W369PLP-10M-6	10	3/8	18	0.9	1.0
W369PLP-10M-8	10	1/2	22	0.9	1.0
W369PLP-12M-6	12	3/8	18	1.0	1.2
W369PLP-12M-8	12	1/2	22	1.0	1.2

**369PLP Male Elbow - BSPP**

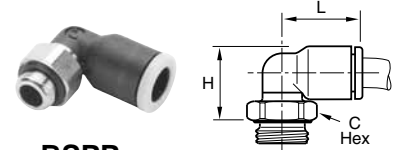

Part No.	Tube Size (mm)	BSPP / Metric	C Hex (mm)	H	L
369PLP-3M-M3	3	M3X0.5	8	15.0	14.5
369PLP-3M-M5	3	M5X0.8	8	13.5	14.5
369PLP-4M-M3	4	M3X0.5	8	15.0	14.5
369PLP-4M-M5	4	M5X0.8	8	13.5	14.0
369PLP-4M-M7	4	M7X1	10	15.0	14.0
369PLP-4M-2G	4	1/8	13	13.0	14.0
369PLP-4M-4G	4	1/4	16	13.0	14.0
369PLP-6M-M5	6	M5X0.8	8	15.5	16.0
369PLP-6M-M7	6	M7X1	10	17.5	16.0
369PLP-6M-M10	6	M10X1	13	15.0	14.0
369PLP-6M-M12	6	M12X1.5	15	15.0	16.0
369PLP-6M-2G	6	1/8	13	15.0	16.0
369PLP-6M-4G	6	1/4	16	15.0	16.0
369PLP-6M-6G	6	3/8	20	15.5	16.0
369PLP-6M-8G	6	1/2	24	16.0	16.0
369PLP-8M-M10	8	M10X1	13	20.5	23.0
369PLP-8M-M12	8	M12X1.5	15	19.5	23.0
369PLP-8M-2G	8	1/8	13	20.5	23.0
369PLP-8M-4G	8	1/4	16	18.5	23.0
369PLP-8M-6G	8	3/8	20	18.5	23.0
369PLP-8M-8G	8	1/2	24	19.0	23.0
369PLP-10M-4G	10	1/4	16	23.5	26.5
369PLP-10M-6G	10	3/8	20	22.0	26.5
369PLP-10M-8G	10	1/2	24	22.0	26.5
369PLP-12M-4G	12	1/4	16	26.5	31.0
369PLP-12M-6G	12	3/8	20	25.0	31.0
369PLP-12M-8G	12	1/2	24	25.0	31.0
369PLP-14M-6G	14	3/8	20	32.5	35.5
369PLP-14M-8G	14	1/2	24	27.0	35.5


**H**

Tubing

Presolok Composite


Presolok Metal

Pipe Fittings & Adapters




**W369PLPX Extended Male Elbow**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	H	L
369PLPX-2-0	1/8	10-32	8	0.91	0.75
W369PLPX-2-2	1/8	1/8	11	0.91	0.75
W369PLPX-2-4	1/8	1/4	14	0.93	0.75
369PLPX-5/32-0	5/32	10-32	8	0.91	0.75
W369PLPX-5/32-2	5/32	1/8	11	0.91	0.75
W369PLPX-5/32-4	5/32	1/4	14	0.93	0.75
369PLPX-4-0	1/4	10-32	11	1.10	0.93
369PLPX-4-M7	1/4	M7	9	1.17	0.93
W369PLPX-4-2	1/4	1/8	11	1.12	0.93
W369PLPX-4-4	1/4	1/4	14	1.08	0.93
W369PLPX-4-6	1/4	3/8	17	1.12	0.93
W369PLPX-5-2	5/16	1/8	13	1.32	1.16
W369PLPX-5-4	5/16	1/4	14	1.28	1.16
W369PLPX-6-2	3/8	1/8	17	1.40	1.34
W369PLPX-6-4	3/8	1/4	17	1.41	1.33
W369PLPX-6-6	3/8	3/8	18	1.45	1.33




**W379PLP Male Elbow 45°**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	H	L
379PLP-2-0	1/8	10-32	8	0.91	0.49
W379PLP-2-2	1/8	1/8	11	0.81	0.49
W379PLP-4-2	1/4	1/8	11	0.98	0.57
W379PLP-4-4	1/4	1/4	14	0.98	0.57
W379PLP-4-M7	1/4	M7	9	1.14	0.57
W379PLP-6-4	3/8	1/4	17	1.36	0.91
W379PLP-6-6	3/8	3/8	18	1.36	0.91



**379PLP 45° Male Elbow - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	C Hex (mm)	H	L
379PLP-4M-M5	4	M5X0.8	8	23.0	13.0
379PLP-4M-2G	4	1/8	13	25.0	13.0
379PLP-6M-M5	6	M5X0.8	8	30.0	14.5
379PLP-6M-2G	6	1/8	13	28.5	14.5
379PLP-6M-4G	6	1/4	16	29.5	14.5
379PLP-8M-2G	8	1/8	13	36.0	19.5
379PLP-8M-4G	8	1/4	16	34.5	19.5
379PLP-8M-6G	8	3/8	20	34.5	19.5
379PLP-10M-4G	10	1/4	16	40.5	23.0
379PLP-10M-6G	10	3/8	20	39.0	23.0
379PLP-10M-8G	10	1/2	24	41.0	23.0
379PLP-12M-4G	12	1/4	16	46.0	26.0
379PLP-12M-6G	12	3/8	20	44.5	26.0
379PLP-12M-8G	12	1/2	24	46.0	26.0



**369PLPX Male Elbow - BSPP**

Part No.	Tube Size (mm)	BSPP / Metric	C Hex (mm)	H
369PLPX-4M-M5	4	M5X0.8	8	23.0
369PLPX-4M-M7	4	M7X1	10	22.5
369PLPX-4M-2G	4	1/8	13	22.5
369PLPX-4M-4G	4	1/4	16	22.5
369PLPX-6M-M5	6	M5X0.8	10	27.5
369PLPX-6M-M7	6	M7X1	10	26.0
369PLPX-6M-2G	6	1/8	13	27.0
369PLPX-6M-4G	6	1/4	16	27.0
369PLPX-8M-2G	8	1/8	13	36.0
369PLPX-8M-4G	8	1/4	16	33.0
369PLPX-8M-6G	8	3/8	20	33.0
369PLPX-10M-4G	10	1/4	16	40.5
369PLPX-10M-6G	10	3/8	20	40.5
369PLPX-10M-8G	10	1/2	24	40.5
369PLPX-12M-4G	12	1/4	19	44.5
369PLPX-12M-6G	12	3/8	20	42.0
369PLPX-12M-8G	12	1/2	24	42.0
369PLPX-14M-6G	14	3/8	22	51.0
369PLPX-14M-8G	14	1/2	24	48.5

**H**


Tubing

Prestolok Composite

Prestolok Metal


Pipe Fittings & Adapters






**W372PLP Male Branch Tee Swivel**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	L/2	H
372PLP-2-0	1/8	10-32	8	0.57	0.61
W372PLP-2-1	1/8	1/16	10	0.57	0.61
W372PLP-2-2	1/8	1/8	11	0.57	0.61
W372PLP-2-4	1/8	1/4	14	0.57	0.63
372PLP-5/32-0	5/32	10-32	8	0.55	0.71
W372PLP-5/32-2	5/32	1/8	11	0.55	0.61
W372PLP-5/32-4	5/32	1/4	14	0.55	0.63
W372PLP-3-2	3/16	1/8	11	0.85	0.67
W372PLP-4-2	1/4	1/8	11	0.71	0.67
W372PLP-4-4	1/4	1/4	14	0.71	0.63
W372PLP-4-6	1/4	3/8	18	0.71	0.65
W372PLP-5-2	5/16	1/8	11	0.91	0.87
W372PLP-5-4	5/16	1/4	14	0.91	0.83
W372PLP-5-6	5/16	3/8	18	0.91	0.85
W372PLP-6-2	3/8	1/8	15	1.04	0.99
W372PLP-6-4	3/8	1/4	15	1.04	0.99
W372PLP-6-6	3/8	3/8	18	1.04	0.95
W372PLP-6-8	3/8	1/2	22	1.04	0.98
W372PLP-8-4	1/2	1/4	20	1.38	1.22
W372PLP-8-6	1/2	3/8	20	1.38	1.22
W372PLP-8-8	1/2	1/2	24	1.38	1.21




**372PLP Male Branch Tee - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	C Hex (mm)	H	L/2
372PLP-4M-M5	4	M5X0.8	8	17.5	14.0
372PLP-4M-2G	4	1/8	13	15.0	14.0
372PLP-4M-4G	4	1/4	16	15.0	14.0
372PLP-6M-M5	6	M5X0.8	8	19.5	16.0
372PLP-6M-2G	6	1/8	13	17.0	16.0
372PLP-6M-4G	6	1/4	16	17.0	16.0
372PLP-8M-2G	8	1/8	13	23.5	23.0
372PLP-8M-4G	8	1/4	16	21.5	23.0
372PLP-8M-6G	8	3/8	20	21.5	23.0
372PLP-10M-4G	10	1/4	16	26.0	26.5
372PLP-10M-6G	10	3/8	20	24.0	26.5
372PLP-10M-8G	10	1/2	24	24.0	26.5
372PLP-12M-4G	12	1/4	16	29.0	31.0
372PLP-12M-6G	12	3/8	20	27.0	31.0
372PLP-12M-8G	12	1/2	24	27.0	31.0
372PLP-14M-6G	14	3/8	20	32.5	35.5
372PLP-14M-8G	14	1/2	24	27.0	35.5





**W372PLP Male Branch Tee - BSPP**

Part No.	Tube Size (mm)	NPT	C Hex (mm)	H	L/2
W372PLP-4M-2	4	1/8	11	0.61	0.55
W372PLP-4M-4	4	1/4	14	0.63	0.55
W372PLP-6M-2	6	1/8	11	0.69	0.63
W372PLP-6M-4	6	1/4	14	0.71	0.63
W372PLP-8M-2	8	1/8	11	0.87	0.91
W372PLP-8M-4	8	1/4	14	0.83	0.91
W372PLP-8M-6	8	3/8	18	0.85	0.91
W372PLP-10M-4	10	1/4	15	0.98	1.04
W372PLP-10M-6	10	3/8	18	0.95	1.04
W372PLP-10M-8	10	1/2	22	0.98	1.04
W372PLP-12M-6	12	3/8	18	1.06	1.22
W372PLP-12M-8	12	1/2	22	0.98	1.22

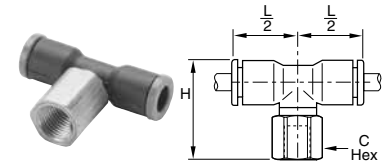

**377PLP Female Branch Tee Swivel**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	L/2	H
377PLP-2-2	1/8	1/8	13	0.57	0.99
377PLP-5/32-2	5/32	1/8	13	0.55	0.91
377PLP-5/32-4	5/32	1/4	16	0.55	1.08
377PLP-4-2	1/4	1/8	13	0.71	1.02
377PLP-4-4	1/4	1/4	16	0.71	1.18
377PLP-5-2	5/16	1/8	13	0.91	1.24
377PLP-5-4	5/16	1/4	16	0.91	1.40
377PLP-6-4	3/8	1/4	16	1.04	1.60
377PLP-8-6	1/2	3/8	22	1.38	1.88

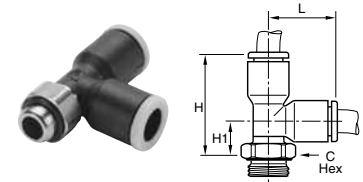

**W371PLP Male Run Tee Swivel**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	L	H	H1
371PLP-2-0	1/8	10-32	8	0.57	0.92	0.35
W371PLP-2-1	1/8	1/16	10	0.57	0.93	0.35
W371PLP-2-2	1/8	1/8	11	0.57	0.93	0.35
371PLP-5/32-0	5/32	10-32	8	0.57	1.02	0.45
W371PLP-5/32-2	5/32	1/8	11	0.57	0.93	0.53
W371PLP-5/32-4	5/32	1/4	14	0.57	0.94	0.37
W371PLP-3-2	3/16	1/8	11	0.85	1.31	0.45
W371PLP-4-2	1/4	1/8	11	0.69	1.16	0.45
W371PLP-4-4	1/4	1/4	14	0.69	1.12	0.41
W371PLP-4-6	1/4	3/8	18	0.69	1.14	0.43
W371PLP-5-2	5/16	1/8	11	0.91	1.38	0.49
W371PLP-5-4	5/16	1/4	14	0.91	1.34	0.45
W371PLP-5-6	5/16	3/8	18	0.91	1.36	0.47
W371PLP-6-2	3/8	1/8	15	1.04	1.63	0.60
W371PLP-6-4	3/8	1/4	15	1.04	1.63	0.60
W371PLP-6-6	3/8	3/8	18	1.04	1.60	0.55
W371PLP-6-8	3/8	1/2	22	1.04	1.63	0.59
W371PLP-8-4	1/2	1/4	20	1.38	2.17	0.79
W371PLP-8-6	1/2	3/8	20	1.38	2.17	0.79
W371PLP-8-8	1/2	1/2	24	1.38	2.07	0.79

**371PLP Male Run Tee - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	C Hex (mm)	H	H1	L
371PLP-4M-M5	4	M5X0.8	8	26.0	11.5	14.5
371PLP-4M-2G	4	1/8	13	23.0	8.5	14.5
371PLP-4M-4G	4	1/4	16	23.0	8.5	14.5
371PLP-6M-M5	6	M5X0.8	8	29.5	12.5	17.5
371PLP-6M-2G	6	1/8	13	27.0	10.0	17.5
371PLP-6M-4G	6	1/4	16	27.0	10.0	17.5
371PLP-8M-2G	8	1/8	13	36.5	14.0	23.0
371PLP-8M-4G	8	1/4	16	34.5	12.0	23.0
371PLP-8M-6G	8	3/8	20	34.5	12.0	23.0
371PLP-10M-4G	10	1/4	16	42.0	15.5	26.5
371PLP-10M-6G	10	3/8	20	40.5	14.0	26.5
371PLP-10M-8G	10	1/2	24	40.5	14.0	26.5
371PLP-12M-4G	12	1/4	16	48.0	17.0	31.0
371PLP-12M-6G	12	3/8	20	46.5	15.5	31.0
371PLP-12M-8G	12	1/2	24	46.5	15.5	31.0
371PLP-14M-6G	14	3/8	20	56.5	21.5	35.5
371PLP-14M-8G	14	1/2	24	51.0	16.0	35.5


H

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters




**W68PLPSP Male Standpipe**

Part No.	Tube Size (In.)	Thread NPT / UNF	C Hex (mm)	H	H1
68PLPSP-5/32-0	5/32	10-32	8	1.24	
W68PLPSP-5/32-2	5/32	1/8	11	1.02	0.57
W68PLPSP-5/32-4	5/32	1/4	14	1.04	0.59
W68PLPSP-4-2	1/4	1/8	11	1.18	0.61
W68PLPSP-4-4	1/4	1/4	14	1.12	0.57
W68PLPSP-5-2	5/16	1/8	11	1.16	0.43
W68PLPSP-5-4	5/16	1/4	14	1.12	0.39
W68PLPSP-6-2	3/8	1/8	15	1.75	0.65
W68PLPSP-6-4	3/8	1/4	15	1.42	0.67
W68PLPSP-6-6	3/8	3/8	17	1.42	0.61
W68PLPSP-8-6	1/2	3/8	17	1.44	0.37
W68PLPSP-8-8	1/2	1/2	21	1.46	0.39




**68PLPSP Male Standpipe - BSPP**

Part No.	Tube Size (mm)	BSPT	C Hex (mm)	H	H1
68PLPSP-4M-M5	4	M5X0.8	8	31.0	16.0
68PLPSP-4M-2G	4	1/8	13	30.0	13.5
68PLPSP-4M-4G	4	1/4	16	31.0	13.5
68PLPSP-6M-2G	6	1/8	13	32.0	13.5
68PLPSP-6M-4G	6	1/4	16	33.0	13.5
68PLPSP-8M-2G	8	1/8	13	35.5	12.5
68PLPSP-8M-4G	8	1/4	16	34.5	10.5
68PLPSP-8M-6G	8	3/8	20	34.5	10.5
68PLPSP-10M-4G	10	1/4	16	43.5	17.5
68PLPSP-10M-6G	10	3/8	20	41.5	15.5
68PLPSP-10M-8G	10	1/2	24	41.5	15.5
68PLPSP-12M-6G	12	3/8	20	42.0	12.0
68PLPSP-12M-8G	12	1/2	24	43.5	12.0
68PLPSP-14M-6G	14	3/8	20	46.5	14.0
68PLPSP-14M-8G	14	1/2	24	48.0	13.5

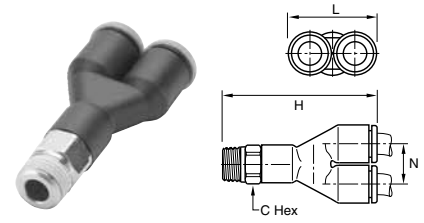


**W368PLP Male Y Connector**

Part No.	Tube Size (In.)	Thread NPT	C Hex (mm)	H	L	N
W368PLP-5/32-2	5/32	1/8	11	1.28	0.69	0.35
W368PLP-5/32-4	5/32	1/4	14	1.30	0.69	0.35
W368PLP-4-2	1/4	1/8	11	1.61	0.87	0.45
W368PLP-4-4	1/4	1/4	14	1.56	0.87	0.45
W368PLP-6-4	3/8	1/4	17	2.24	1.30	0.67
W368PLP-6-6	3/8	3/8	18	2.28	1.30	0.67

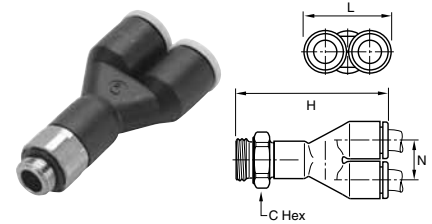


**368PLP Male Y Connector - BSPP**

Part No.	Tube Size (mm)	BSPP / M5	C Hex (mm)	H	L	N
368PLP-4M-M5	4	M5X0.8	8	32.5	17.5	9.0
368PLP-4M-2G	4	1/8	13	32.0	17.5	9.0
368PLP-4M-4G	4	1/4	16	32.0	17.5	9.0
368PLP-6M-M5	6	M5X0.8	10	39.5	21.5	11.0
368PLP-6M-2G	6	1/8	13	39.0	21.5	11.0
368PLP-6M-4G	6	1/4	16	39.0	21.5	11.0
368PLP-8M-2G	8	1/8	13	56.0	28.0	14.5
368PLP-8M-4G	8	1/4	16	55.0	28.0	14.5
368PLP-8M-6G	8	3/8	19	54.0	28.0	14.5
368PLP-10M-4G	10	1/4	16	63.5	33.0	17.0
368PLP-10M-6G	10	3/8	20	63.5	33.0	17.0
368PLP-10M-8G	10	1/2	20	65.0	33.0	17.0
368PLP-12M-6G	12	3/8	19	68.0	39.0	20.0
368PLP-12M-8G	12	1/2	24	70.0	39.0	20.0




**368PLPD Double Y Male Connector - BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex (mm)	H	L	M	N	Mounting Hole Dia.
368PLPD-4M-2G	4	1/8	13	25.5	41.0	21.0	10.0	3.7
368PLPD-4M-4G	4	1/4	16	25.5	40.0	21.0	10.0	3.7
368PLPD-6M-2G	6	1/8	19	31.5	52.5	26.5	12.0	3.7
368PLPD-6M-4G	6	1/4	19	31.5	53.5	26.5	12.0	3.7

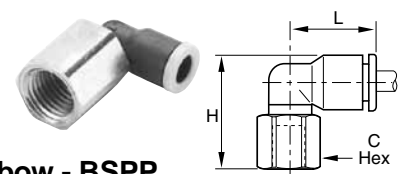

**370PLP Female Elbow - BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex (mm)	H	L
370PLP-4M-2G	4	1/8	13	23.0	14.0
370PLP-4M-4G	4	1/4	16	27.0	14.0
370PLP-6M-2G	6	1/8	13	25.0	16.0
370PLP-6M-4G	6	1/4	16	29.0	16.0
370PLP-8M-2G	8	1/8	13	28.0	23.0
370PLP-8M-4G	8	1/4	16	32.0	23.0
370PLP-8M-6G	8	3/8	19	33.0	23.0
370PLP-10M-4G	10	1/4	16	34.5	26.5
370PLP-10M-6G	10	3/8	19	35.0	26.5
370PLP-10M-8G	10	1/2	24	41.0	26.5
370PLP-12M-4G	12	1/4	16	38.0	30.5
370PLP-12M-6G	12	3/8	19	38.5	30.5
370PLP-12M-8G	12	1/2	24	43.5	30.5

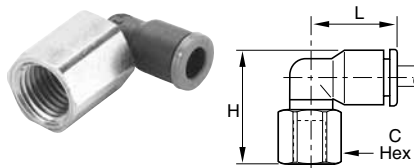

**370PLP Female Elbow Swivel**

Part No.	Tube Size (In.)	Thread NPT	C Hex (mm)	L	H
370PLP-2-2	1/8	1/8	13	0.57	0.91
370PLP-5/32-2	5/32	1/8	13	0.55	0.91
370PLP-5/32-4	5/32	1/4	16	0.55	1.08
370PLP-4-2	1/4	1/8	13	0.71	1.02
370PLP-4-4	1/4	1/4	16	0.71	1.18
370PLP-5-2	5/16	1/8	13	0.91	1.12
370PLP-5-4	5/16	1/4	16	0.91	1.28
370PLP-6-4	3/8	1/4	16	1.04	1.52
370PLP-8-6	1/2	3/8	22	1.38	1.88

**H**

**Tubing**


**Prestolok Composite**

**Prestolok Metal**

**Pipe Fittings & Adapters**


**Part Numbers**

**Prestolok Composite Fittings**




**32PLP Equal Union**

Part No.	Tube Size (In.)	L
32PLP-2	1/8	0.97
32PLP-5/32	5/32	0.98
32PLP-3	3/16	1.44
32PLP-4	1/4	1.16
32PLP-5	5/16	1.50
32PLP-6	3/8	1.65
32PLP-8	1/2	2.17




**32PLP Unequal Union**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L
32PLP-5/32-2	5/32	1/8	0.96
32PLP-5/32-4	5/32	1/4	1.16
32PLP-4-2	1/4	1/8	1.32
32PLP-5-4	5/16	1/4	1.44
32PLP-6-4	3/8	1/4	1.61
32PLP-6-8	3/8	1/2	2.17




**32PLP Union**

Part No.	Tube Size (mm)	L
32PLP-3M	3	25.0
32PLP-4M	4	25.0
32PLP-6M	6	28.5
32PLP-8M	8	38.0
32PLP-10M	10	42.0
32PLP-12M	12	50.5
32PLP-14M	14	56.0




**32PLP Unequal Union**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	L
32PLP-3M-4M	3	4	25.0
32PLP-6M-4M	6	4	28.0
32PLP-8M-4M	8	4	28.0
32PLP-8M-6M	8	6	38.0
32PLP-10M-6M	10	6	42.0
32PLP-10M-8M	10	8	42.0
32PLP-12M-10M	12	10	50.5
32PLP-12M-14M	12	14	56.0
32PLP-12M-8M	12	8	50.5




**32PLP Converter**

PartNo.	Tube Size (In.)	Tube Size (mm)	L
32PLP-6M-4	1/4	6	1.18
32PLP-10M-6	3/8	10	1.99
32PLP-12M-8	1/2	12	2.25

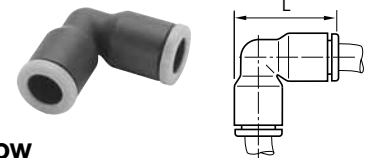


**365PLP Union Elbow**

Part No.	Tube Size (In.)	L
365PLP-2	1/8	0.71
365PLP-5/32	5/32	0.75
365PLP-3	3/16	1.07
365PLP-4	1/4	0.93
365PLP-5	5/16	1.16
365PLP-6	3/8	1.33
365PLP-8	1/2	1.38

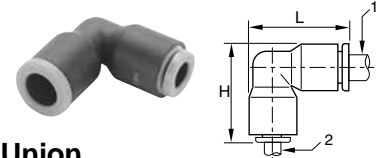


**365PLP Unequal Union**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L	H
365PLP-2-4	1/8	1/4	0.93	0.93
365PLP-5/32-4	5/32	1/4	0.93	0.93
365PLP-6-4	3/8	1/4	1.33	1.30
365PLP-6-8	3/8	1/2	1.81	1.81




**365PLP Union Elbow**

Part No.	Tube Size (mm)	L
365PLP-4M	4	19.0
365PLP-6M	6	22.5
365PLP-8M	8	29.5
365PLP-10M	10	34.5
365PLP-12M	12	40.5
365PLP-14M	14	46.5

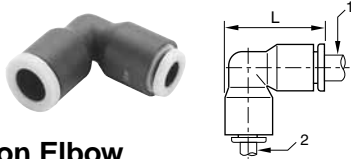


**365PLP Unequal Union Elbow**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	L
365PLP-4M-6M	4	6	22.5
365PLP-6M-8M	6	8	29.5
365PLP-8M-10M	8	10	34.5
365PLP-10M-12M	10	12	40.5

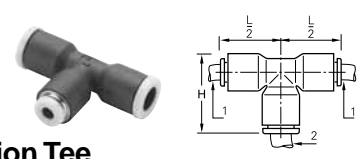


**364PLP Unequal Union Tee**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L/2
364PLP-4M-6M	4	6	22.5	17.5
364PLP-6M-4M	6	4	22.5	17.5
364PLP-6M-8M	6	8	29.5	23.0
364PLP-8M-6M	8	6	29.5	23.0
364PLP-8M-10M	8	10	34.5	26.5
364PLP-10M-12M	10	12	34.5	26.5
364PLP-10M-8M	10	8	40.5	31.0
364PLP-12M-10M	12	10	40.5	31.0
364PLP-14M-8M	14	8	46.0	35.5




**364PLP Union Tee**

Part No.	Tube Size (In.)	L/2	H
364PLP-2	1/8	0.57	0.75
364PLP-5/32	5/32	0.57	0.75
364PLP-3	3/16	0.85	1.07
364PLP-4	1/4	0.93	0.89
364PLP-5	5/16	0.91	1.16
364PLP-6	3/8	1.02	1.34
364PLP-8	1/2	1.38	1.81

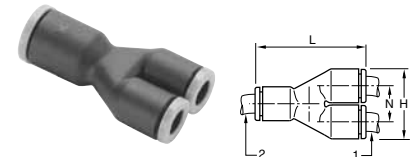


**362PLP Union Y Connector**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L	H	N
362PLP-2	1/8	1/8	1.12	0.69	0.35
362PLP-2-4	1/8	1/4	1.42	0.87	0.45
362PLP-5/32	5/32	5/32	1.12	0.69	0.35
362PLP-5/32-4	5/32	1/4	1.42	0.87	0.45
362PLP-4	1/4	1/4	1.42	0.87	0.45
362PLP-4-6	1/4	3/8	1.31	1.30	0.67
362PLP-5	5/16	5/16	1.77	1.10	0.57
362PLP-6	3/8	3/8	2.09	1.30	0.67

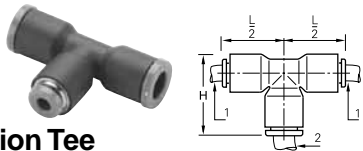


**364PLP Unequal Union Tee**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L/2	H
364PLP-2-4	1/8	1/4	0.71	0.93
364PLP-5/32-4	5/32	1/4	0.71	0.93
364PLP-4-2	1/4	1/8	0.73	0.93
364PLP-4-5/32	1/4	5/32	0.73	0.93
364PLP-4-6	1/4	3/8	0.96	1.32
364PLP-6-4	3/8	1/4	1.00	1.28
364PLP-6-8	3/8	1/2	1.38	1.81
364PLP-8-4	1/2	1/4	1.38	1.81
364PLP-8-6	1/2	3/8	1.38	1.81

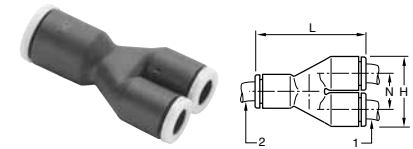

**362PLP Union Y Connector**

Part No.	1 Tube Size (mm)	2 Tube Size (m)	H	L	N
362PLP-4M	4	4	17.5	28.5	9.0
362PLP-6M	6	6	21.5	35.0	11.0
362PLP-8M	8	8	28.0	45.0	14.5
362PLP-10M	10	10	33.0	53.0	17.0
362PLP-12M	12	12	39.0	57.0	20.0
362PLP-4M-6M	4	6	17.5	33.0	9.0
362PLP-6M-8M	6	8	22.5	41.0	11.5
362PLP-8M-10M	8	10	28.0	47.0	14.5
362PLP-10M-12M	10	12	33.0	57.0	17.0



**364PLP Union Tee**

Part No.	Tube Size (mm)	H	L/2
364PLP-3M	3	19.0	14.5
364PLP-4M	4	19.0	14.5
364PLP-6M	6	23.5	18.0
364PLP-8M	8	29.5	23.0
364PLP-10M	10	34.5	26.5
364PLP-12M	12	40.5	31.0
364PLP-14M	14	46.0	35.5


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters

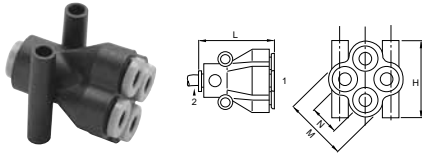


**362PLPD Double Y Connector**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	L	M	N	Mounting Hole Dia.
362PLPD-5/32	5/32	5/32	1.00	1.20	0.83	0.39	0.15
362PLPD-5/32-4	5/32	1/4	1.00	1.18	0.83	0.39	0.15

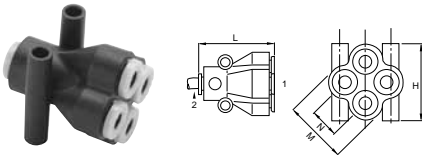


**362PLPD Double Y Connector**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L	M	N	Mounting Hole Dia.
362PLPD-4M	4	4	25.5	30.5	21.0	10.0	3.7
362PLPD-6M	6	6	31.5	37.5	26.5	12.0	3.7
362PLPD-4M-6M	4	6	25.5	30.5	21.0	10.0	3.7
362PLPD-6M-8M	6	8	31.5	38.0	26.5	12.0	3.7

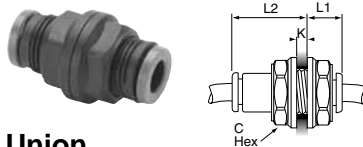


**32PLPBH Bulkhead Union**

Part No.	Tube Size (In.)	C Hex (mm)	K Max	L1	L2
32PLPBH-2	1/8	13	0.22	0.37	0.61
32PLPBH-5/32	5/32	13	0.22	0.59	0.39
32PLPBH-4	1/4	16	0.35	0.37	0.81
32PLPBH-5	5/16	18	0.57	0.98	0.53
32PLPBH-6	3/8	22	0.57	0.51	1.18
32PLPBH-8	1/2	29	0.81	0.67	1.61

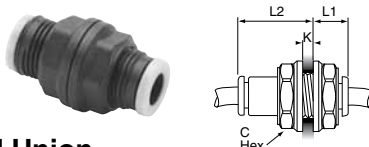

**32PLPBH Bulkhead Union**

Part No.	Tube Size (mm)	C Hex (mm)	K Max	L1	L2
32PLPBH-4M	4	13	5.5	15.0	10.0
32PLPBH-6M	6	15	8.5	18.0	10.5
32PLPBH-8M	8	18	14.5	25.0	13.5
32PLPBH-10M	10	22	14.5	27.5	15.5
32PLPBH-12M	12	26	18.5	33.0	18.0
32PLPBH-14M	14	29	20.5	37.5	20.5

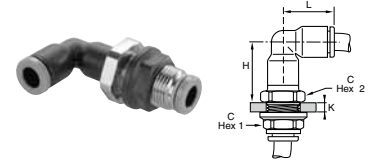


**365PLPBH Equal Bulkhead Elbow**

Part No.	Tube Size (In.)	C1 Hex	C2 Hex	K Max	H	L
365PLPBH-2	1/8	13	13	0.28	0.71	0.57
365PLPBH-5/32	5/32		13	0.26	0.83	0.67
365PLPBH-4	1/4	18	17	0.32	0.87	0.71
365PLPBH-5	5/16		18	0.31	1.22	0.94
365PLPBH-6	3/8	22	22	0.33	1.08	1.00
365PLPBH-8	1/2	29	27	0.41	1.54	1.38




**365PLPBH Equal Bulkhead Elbow**

Part No.	Tube Size (mm)	C1 Hex	C2 Hex	K Max	H	L
365PLPBH-4M	4	13	13	6.5	21.0	17.0
365PLPBH-6M	6	15	15	7.0	24.5	19.5
365PLPBH-8M	8	18	18	8.0	31.0	24.0
365PLPBH-10M	10	22	22	8.5	36.0	28.0
365PLPBH-12M	12	26	26	8.5	42.0	33.0

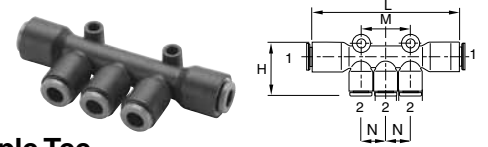

**24PLP Multiple Tee**


Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	L	M	N	Mounting Hole Dia.
24PLP-4-5/32	1/4	5/32	0.97	2.81	0.90	0.45	0.17
24PLP-4-4	1/4	1/4	1.22	3.14	1.21	0.61	0.17
24PLP-5-5/32	5/16	5/32	0.96	2.91		0.45	0.17
24PLP-6-4	3/8	1/4	1.34	3.21	1.22	0.61	0.17

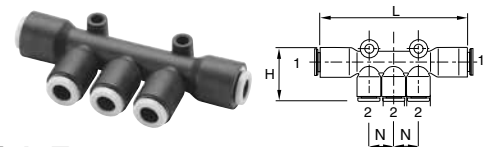

**24PLP Multiple Tee**


Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L	N	Mounting Hole Dia.
24PLP-6M-4M	6	4	24.5	74	11.5	4.2
24PLP-8M-4M	8	4	24.5	74	11.5	4.2
24PLP-8M-6M	8	6	24.5	74	11.5	4.2
24PLP-10M-6M	10	6	36.0	81	14.5	4.2
24PLP-10M-8M	10	8	36.0	81	14.5	4.2






**24PLPD Double Multiple Tee**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	L	M	N	Mounting Hole Dia.
24PLPD-4-5/32	1/4	5/32	0.73	2.84	1.69	0.45	0.17
24PLPD-4-4	1/4	1/4	0.73	2.84	1.69	0.45	0.17
24PLPD-5-5/32	5/16	5/32	0.77	2.87	1.69	0.45	0.17
24PLPD-6-4	3/8	1/4	0.91	3.31	2.05	0.57	0.17




**347PLP Unequal Cross**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L	Mounting Hole Dia.
347PLP-4M-6M	4	6	36	20.0	4.2
347PLP-6M-8M	6	8	46	22.5	4.2
347PLP-4M-6M	4	6	36	20.0	4.2
374PLP-6M-8M	6	8	46	22.5	4.2




**24PLPD Double Multiple Tee**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L	M	N	Mounting Hole Dia.
24PLPD-6M-4M	6	4	18.5	72.0	43.0	11.5	4.2
24PLPD-8M-4M	8	4	18.5	73.0	43.0	11.5	4.2
24PLPD-8M-6M	8	6	18.5	73.0	43.0	11.5	4.2
24PLPD-10M-6M	10	6	23.0	84.0	52.0	14.5	4.2
24PLPD-10M-8M	10	8	23.5	84.0	52.0	14.5	4.2




**369PLPSP Plug-In Elbow**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	H1	H2	L
369PLPSP-2	1/8	1/8	0.92	0.31	0.64	0.57
369PLPSP-5/32	5/32	5/32	0.91	0.24	0.61	0.55
369PLPSP-5/32-4	5/32	1/4	1.08	0.30	0.71	0.71
369PLPSP-4	1/4	1/4	1.20	0.43	0.83	0.73
369PLPSP-4-6	1/4	3/8	1.52	0.35	0.96	0.98
369PLPSP-5	5/16	5/16	1.32	0.32	0.85	0.91
369PLPSP-6	3/8	3/8	1.52	0.35	0.96	1.02
369PLPSP-8	1/2	1/2	2.00	0.51	1.12	1.38




**347PLP Equal Cross**

Part No.	Tube Size (In.)	H	L	Mounting Hole Dia.
347PLP-5/32	5/32	1.42	0.79	0.17
347PLP-4	1/4	1.40	0.79	0.17
347PLP-5	5/16	1.81	0.89	0.17



**369PLPSP Plug-In Elbow**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	H1	H2	L
369PLPSP-4M	4	4	23.0	6.0	15.5	14.0
369PLPSP-6M	6	6	26.5	7.0	17.0	16.0
369PLPSP-8M	8	8	33.5	8.0	21.5	23.0
369PLPSP-10M	10	10	39.0	9.5	24.5	23.5
369PLPSP-12M	12	12	44.5	10.0	27.5	31.0
369PLPSP-4M-6M	4	6	26.5	7.0	17.0	16.0
369PLPSP-6M-4M	6	4	24.5	7.0	15.5	16.0
369PLPSP-6M-8M	6	8	33.5	8.0	21.5	22.0
369PLPSP-8M-10M	8	10	39.0	8.5	24.5	26.5
369PLPSP-10M-12M	10	12	44.5	10.0	27.5	31.0



**347PLP Equal Cross**

Part No.	Tube Size (mm)	H	L	Mounting Hole Dia.
347PLP-4M	4	36	20.0	4.2
347PLP-6M	6	36	20.0	4.2
347PLP-8M	8	46	22.5	4.2


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters




**369PLPSPX Extended Plug-In Elbow**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	H1	H2	L
369PLPSPX-2	1/8	1/8	1.26	0.65	0.98	0.57
369PLPSPX-5/32	5/32	5/32	1.28	0.61	0.98	0.55
369PLPSPX-4	1/4	1/4	1.56	0.77	1.18	0.71
369PLPSPX-5	5/16	5/16	1.93	0.93	1.46	0.91
369PLPSPX-6	3/8	3/8	2.19	1.02	1.63	1.02




**369PLPXSP Extended Plug-In Elbow**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	H1	H2	L
369PLPXSP-4M	4	4	32.5	15.5	25.0	14.0
369PLPXSP-6M	6	6	38.5	19.0	29.0	16.0
369PLPXSP-8M	8	8	49.0	23.5	37.0	23.0
369PLPXSP-10M	10	10	56.0	26.5	41.5	26.5
369PLPXSP-12M	12	12	62.5	28.0	45.5	31.0
369PLPXSP-4M-6M	4	6	38.5	19.0	29.0	16.0
369PLPXSP-6M-8M	6	8	49.0	23.5	37.0	23.0
369PLPXSP-8M-10M	8	10	56.0	26.5	41.5	26.5
369PLPXSP-10M-12M	10	12	62.5	28.0	45.5	31.0




**379PLPSP 45° Plug-In Elbow**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	H1	H2	L
379PLPSP-2	1/8	1/8	1.14	0.59	0.69	0.47
379PLPSP-5/32	5/32	5/32	1.32	0.75	0.83	0.51
379PLPSP-4	1/4	1/4	1.44	0.71	0.87	0.57
379PLPSP-5	5/16	5/16	1.73	0.85	1.00	0.77
379PLPSP-6	3/8	3/8	2.00	0.96	1.16	0.91




**379PLPSP 45° Plug-In Elbow**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	H1	H2	L
379PLPSP-4M	4	4	33.5	19.0	21.0	13.0
379PLPSP-6M	6	6	39.0	21.0	25.0	14.5
379PLPSP-8M	8	8	44.0	21.5	25.5	19.5
379PLPSP-10M	10	10	53.0	27.0	32.5	23.0
379PLPSP-12M	12	12	58.5	27.5	34.0	26.5




**372PLPSP Plug-In Branch Tee**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	H1	H2	L/2
372PLPSP-2	1/8	1/8	0.95	0.26	0.59	0.57
372PLPSP-5/32	5/32	5/32	0.91	0.24	0.61	0.57
372PLPSP-4	1/4	1/4	0.98	0.43	0.77	0.73
372PLPSP-5	5/16	5/16	1.32	0.32	0.85	0.91
372PLPSP-6	3/8	3/8	1.61	0.35	0.96	0.98
372PLPSP-8	1/2	1/2	2.01	0.51	1.12	1.38

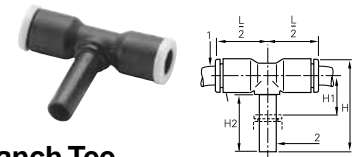


**372PLPSP Plug-In Branch Tee**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	H1	H2	L/2
372PLPSP-4M	4	4	23.0	6.0	15.5	14.5
372PLPSP-6M	6	6	26.5	7.0	17.0	16.0
372PLPSP-8M	8	8	33.5	8.0	21.5	23.0
372PLPSP-10M	10	10	39.0	9.5	24.5	26.5
372PLPSP-12M	12	12	44.5	10.0	27.5	31.0
372PLPSP-4M-6M	4	6	26.5	7.0	17.0	16.0
372PLPSP-6M-8M	6	8	33.5	8.0	21.5	23.0
372PLPSP-8M-10M	8	10	39.0	9.5	24.5	26.5
372PLPSP-10M-12M	10	12	44.5	10.0	27.5	31.0




**371PLPSP Plug-In Run Tee**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	H	H1	H2	L
371PLPSP-5/32	5/32	5/32	1.30	0.24	0.61	0.57
371PLPSP-4	1/4	1/4	1.69	0.43	0.83	0.73
371PLPSP-5	5/16	5/16	1.93	0.32	0.85	0.91
371PLPSP-6	3/8	3/8	2.23	0.33	0.96	1.00
371PLPSP-8	1/2	1/2	2.86	0.51	1.12	1.38




**371PLPSP Plug-In Run Tee**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	H1	H2	L
371PLPSP-4M	4	4	33.0	6.0	15.5	14.5
371PLPSP-6M	6	6	38.5	7.0	17.0	17.5
371PLPSP-8M	8	8	49.0	8.0	21.5	23.0
371PLPSP-10M	10	10	57.0	10.5	24.5	26.5
371PLPSP-12M	12	12	65.5	10.5	27.5	31.0
371PLPSP-4M-6M	4	6	10.5	7.0	17.0	17.5
371PLPSP-6M-8M	6	8	13.5	8.0	21.5	23.0
371PLPSP-8M-10M	8	10	16.0	10.5	24.5	26.5
371PLPSP-10M-12M	10	12	19.0	10.5	27.5	31.0

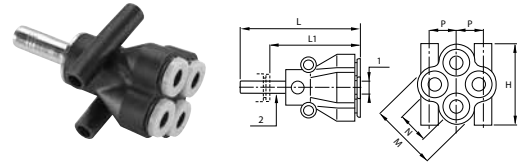


**362PLPDSP Plug-In Multiple Y**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	H	L	L1	M	N
362PLPDSP-6M-4M	6	4	25.5	45.0	31.0	21.0	10.0
362PLPDSP-8M-4M	8	4	25.5	49.5	31.0	21.0	10.0
362PLPDSP-8M-6M	8	6	31.5	59.5	41.0	26.5	12.0

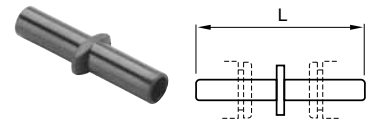


**63PLP Double Male Union**

Part No.	Tube Size (In.)	L
63PLP-5/32	5/32	1.36
63PLP-4	1/4	1.52
63PLP-5	5/16	1.61
63PLP-6	3/8	2.03
63PLP-8	1/2	2.13

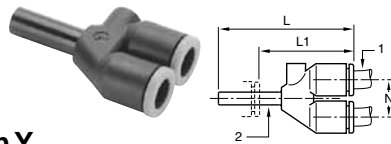


**362PLPSP Plug-In Y**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L	L1	N
362PLPSP-2	1/8	1/8	1.36	1.00	0.35
362PLPSP-5/32	5/32	5/32	1.34	0.85	0.35
362PLPSP-4	1/4	1/4	1.60	1.02	0.45
362PLPSP-5	5/16	5/16	2.00	1.26	0.57
362PLPSP-6	3/8	3/8	2.23	1.42	0.67



**63PLP Double Male Union**

Part No.	Tube Size (mm)	L
63PLP4M	4	34 1/2
63PLP6M	6	38 1/2
63PLP8M	8	41
63PLP10M	10	51 1/2
63PLP12M	12	60
63PLP14M	14	69 1/2

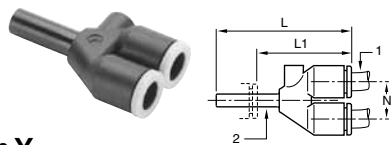

**362PLPSP Plug-In Y**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	L	L1	N
362PLPSP-4M	4	4	34.0	21.5	9.0
362PLPSP-6M	6	6	39.5	25.5	11.0
362PLPSP-8M	8	8	50.5	32.0	14.5
362PLPSP-10M	10	10	57.5	36.0	17.0
362PLPSP-12M	12	12	66.0	41.0	20.0
362PLPSP-4M-6M	4	6	35.5	21.5	9.0
362PLPSP-6M-8M	6	8	44.0	25.5	11.0
362PLPSP-8M-10M	8	10	53.5	32.0	14.5
362PLPSP-10M-12M	10	12	60.0	35.0	17.0


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters




**67PLP Tube End Reducer**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L	L1
67PLP-2-5/32	1/8	5/32	1.79	1.32
67PLP-2-3	1/8	3/16	1.79	1.14
67PLP-2-4	1/8	1/4	1.79	1.22
67PLP-5/32-3	5/32	3/16	1.48	.83
67PLP-5/32-4	5/32	1/4	1.48	.91
67PLP-5/32-5	5/32	5/16	1.48	.75
67PLP-5/32-6	5/32	3/8	1.61	.81
67PLP-3-5	3/16	5/16	1.79	1.06
67PLP-3-4	3/16	1/4	1.79	1.22
67PLP-4-5	1/4	5/16	1.61	.89
67PLP-4-6	1/4	3/8	1.61	.81
67PLP-4-8	1/4	1/2	1.97	.98
67PLP-5-6	5/16	3/8	1.93	1.12
67PLP-5-8	5/16	1/2	2.01	1.02
67PLP-6-8	3/8	1/2	2.01	1.04




**32PLPSP Tube Expander**

Part No.	1 Tube Size (In.)	2 Tube Size (In.)	L	L1
32PLPSP-4-2	1/4	1/8	1.61	1.16
32PLPSP-4-6M	1/4	6M	1.75	1.02
32PLPSP-4-5/32	1/4	5/32	1.61	1.14
32PLPSP-4-3	1/4	3/16	1.61	1.00
32PLPSP-6-4	3/8	1/4	1.58	1.00




**32PLPSP Tube Expander**

Part No.	Tube Size (mm)	Tube Size (mm)	L	L1
32PLPSP-6M-4M	6	4	35.0	23.0
32PLPSP-8M-6M	8	6	45.0	31.5
32PLPSP-10M-8M	10	8	42.5	21.0
32PLPSP-12M-10M	12	10	49.0	24.5




**67PLP Tube Reducer**

Part No.	1 Tube Size (mm)	2 Tube Size (mm)	L	L1
67PLP-6M-4M	6	4	37.5	23.5
67PLP-8M-4M	8	4	37.5	19.0
67PLP-8M-6M	8	6	36.0	20.5
67PLP-10M-4M	10	4	44.0	22.5
67PLP-10M-6M	10	6	38.0	17.5
67PLP-10M-8M	10	8	49.0	28.5
67PLP-12M-10M	12	10	56.5	33.5
67PLP-12M-6M	12	6	46.0	23.0
67PLP-12M-8M	12	8	49.0	24.5
67PLP-14M-10M	14	10	58.5	33.5
67PLP-14M-12M	14	12	58.5	33.5
67PLP-14M-6M	14	6	48.0	23.0
67PLP-14M-8M	14	8	48.0	23.0



**32PLPSP Tube Converter**

Part No.	1 Tube Size (mm)	2 Tube Size (In.)	L	L1
32PLPSP-4M-2	4M	1/8	1.61	1.16
32PLPSP-8M-4	8M	1/4	1.58	1.00

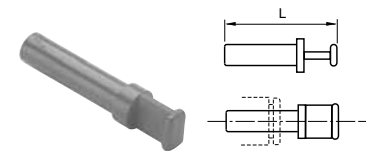

**639PLP Plug**

Part No.	Tube Size (In.)	L
639PLP-2	1/8	1.30
639PLP-5/32	5/32	1.18
639PLP-3	3/16	1.36
639PLP-4	1/4	1.44
639PLP-5	5/16	1.38
639PLP-6	3/8	1.67
639PLP-8	1/2	1.91


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters




**639PLP Plug**

Part No.	Tube Size (mm)	L
639PLP-3M	3	25
639PLP-4M	4	30
639PLP-6M	6	33
639PLP-8M	8	33
639PLP-10M	10	42
639PLP-12M	12	45
639PLP-14M	14	49

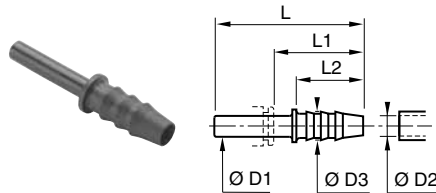


**322PLPSP Barbed Connector**

Part No.	OD 1	OD 2	OD 3	L	L1	L2
322PLPSP-2-5/32	5/32	0.12	0.20	1.46	0.98	0.67
322PLPSP-5M-5/32	5/32	0.20	0.28	1.46	0.98	0.67
322PLPSP-3-4	1/4	3/16		1.65	1.00	
322PLPSP-4-5	5/16	0.25	0.34	1.55	0.83	0.67
322PLPSP-5-5	3/8	0.32	0.39	1.75	1.02	0.87
322PLPSP-5-6	3/8	0.32	0.39	1.97	1.16	0.87

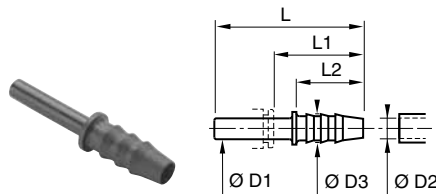


**322PLPSP Barbed Connector**

Part No.	OD 1	OD 2	OD 3	L	L1	L2
322PLPSP-3M-4M	4	3.2	5.0	37.0	25.0	17.0
322PLPSP-5M-4M	4	5.0	7.0	37.0	25.0	17.0
322PLPSP-5M-6M	6	5.0	7.0	39.0	25.0	17.0
322PLPSP-6M-8M	8	6.3	8.5	39.5	21.0	17.0
322PLPSP-8M-8M	8	8.0	10.0	44.5	26.0	22.0
322PLPSP-6M-10M	10	6.3	8.0	45.0	24.5	17.0
322PLPSP-8M-10M	10	8.0	10.0	50.0	29.5	22.0
322PLPSP-8M-12M	12	8.0	10.0	50.0	26.0	22.0
322PLPSP-1012M	12	10.0	12.0	48.5	25.5	22.5
322PLPSP-1212M	12	12.5	14.5	57.0	34.0	22.5
322PLPSP-1214M	14	12.5	14.5	59.5	34.5	22.5
322PLPSP-1414M	14	14.0	16.0	59.5	34.5	22.5

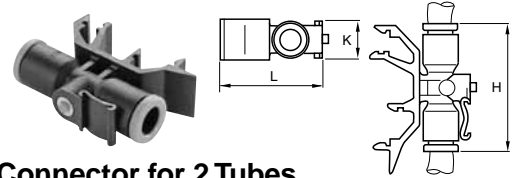


**32PLPRC Connector for 2 Tubes**

Part No.	Tube Size (In.)	H	K	L
32PLPRC-5/32	5/32	1.44	0.47	1.18
32PLPRC-4	1/4	1.44	0.47	1.18
32PLPRC-5	5/16	1.81	0.51	1.28

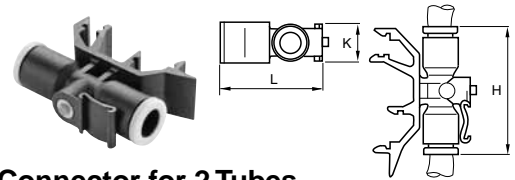


**32PLPRC Connector for 2 Tubes**

Part No.	Tube Size (mm)	H	K	L
32PLPRC-4M	4	36.5	11.0	39.5
32PLPRC-6M	6	36.5	11.0	39.5
32PLPRC-8M	8	46.0	13.0	44.5

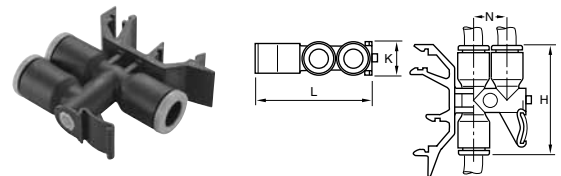

**32PLPDRC Connector for 3 Tubes**

Part No.	Tube Size (In.)	H	K	L	N
32PLPDRC-5/32	5/32	1.44	0.43	1.56	0.45
32PLPDRC-5	5/16	1.81	0.51	1.75	0.57

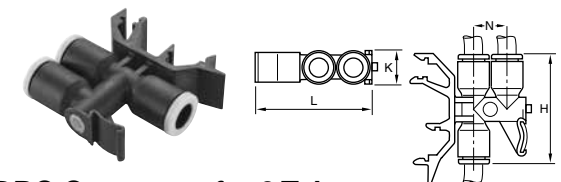

**32PLPDRC Connector for 3 Tubes**

Part No.	Tube Size (mm)	H	K	L	N
32PLPDRC-4M	4	36.5	11.0	39.5	
32PLPDRC-6M	6	36.5	11.0	39.5	
32PLPDRC-8M	8	46.0	13.0	14.5	

**H**

Tubing

Prestolok Composite

Prestolok Metal

Pipe Fittings & Adapters

































**H**

Tubing



Prestolok  
Composite

Prestolok  
Metal

Pipe Fittings  
& Adapters

	<b>Tube to Male NPTF</b>	<b>W68PLP</b> Male Connector  Page H30	<b>W68PLPR</b> Male Connector Round Body  Page H31	<b>W68PW</b> Male Connector  Page H36	<b>W169PLP</b> Male Elbow Swivel  Page H33	<b>W169PLPNS</b> Male Elbow  Page H33	
	<b>W169PW</b> Male Elbow Swivel  Page H37	<b>W171PLP</b> Male Run Tee Swivel  Page H34	<b>W171PW</b> Male Run Tee Swivel  Page H37	<b>W172PLP</b> Male Branch Tee Swivel  Page H35	<b>W172PW</b> Male Branch Tee Swivel  Page H37		
	<b>Tube to Tube</b>	<b>62PLP</b> Union  Page H29	<b>62PW</b> Union  Page H36	<b>164PLP</b> Union Tee  Page H32	<b>164PW</b> Union Tee  Page H37	<b>165PLP</b> Union Elbow  Page H32	
	<b>165PW</b> Union Elbow  Page H37	<b>Tube to Female NPTF</b>	<b>66PLP</b> Female Connector  Page H30	<b>66PW</b> Female Connector  Page H36			
	<b>H</b>	<b>Bulkhead Unions</b>	<b>62PLPBH</b> Union Bulkhead  Page H29	<b>66PLPBH</b> Female Bulkhead  Page H29	<b>62PWBH</b> Union Bulkhead  Page H36	<b>66PWBH</b> Female Bulkhead  Page H36	
	<b>Tubing</b>	<b>Tube to Male BSPP</b>	<b>PLHBF4-B</b> Male Connector  Page H31	<b>Auxiliary Components</b>	<b>DB</b> Dust/Weld Spatter Boot  Page H36		
<b>Prestolok Composite</b>	<b>Metric Tube to Male NPTF</b>	<b>FPB</b> Male Connector  Page H31	<b>C6PB</b> Male Elbow  Page H33	<b>Metric Tube to Metric Tube</b>	<b>HPB</b> Union  Page H37	<b>JPB</b> Union Tee  Page H32	
<b>Prestolok Metal</b>	<b>EPB</b> Union Elbow  Page H32	<b>Metric Bulkhead Unions</b>	<b>WBMPB</b> Mixed Bulkhead Union  Page H29	<b>WPB</b> Union Bulkhead  Page H29	<b>WE6PB</b> Union Elbow Bulkhead  Page H32		
<b>Pipe Fittings &amp; Adapters</b>							



<b>Metric Tube to Female BSPP</b>	<b>G4PB</b> Female Connector  Page H30	<b>WG4PB</b> Union Female Bulkhead  Page H30	<b>Metric Tube to Male BSPP</b>	<b>C64PB</b> Male Elbow Swivel  Page H33	<b>C64SPB</b> Male Elbow Swivel  Page H34
	<b>F4PB</b> Male Connector  Page H31	<b>R64PB</b> Male Run Tee Swivel  Page H34		<b>S64PB</b> Male Branch Tee Swivel  Page H35	<b>Metric Tube to Metric Straight Thread</b>
<b>F28PB</b> Male Connector  Page H31	<b>F8PB</b> Male Connector  Page H31	<b>R68PB</b> Male Run Tee Swivel  Page H34	<b>S68PB</b> Male Branch Tee Swivel  Page H35		
<b>Metric Auxiliary Components</b>	<b>TRPB</b> Tube End Reducer  Page H35	<b>FNPB</b> Plug  Page H36	<b>TEPB</b> Tube End Expander  Page H35		

<b>H</b>
Tubing
Presolok Composite
Prestolok Metal
Pipe Fittings & Adapters

**Features**

Materials of Construction	
Nickel Plated Bodies:	Nickel plated brass
O-ring:	Nitrile (other compounds available on request)
Release Button:	Polyacetal
Grab Ring:	Stainless Steel
Note:	For brass body Prestolok replace PLP with PLN

Nomenclature	
Example: W68PLP-4-2	Attribute:
W	White Arcylic Thread Sealant
68	Male Connector
PIP	Prestolok
4	1/4" (4/16) Tube O.D.
2	1/8" (2/16) Pipe Thread

Specifications	
Pressure Range:	Up to 300 PSI depending on tubing
Temperature Range:	0° to +200°F
Note:	Vacuum applications are dependent upon temperature and type of tubing used.

Tubing sizes	
Tube O.D.:	1/8, 3/16, 5/32, 1/4, 5/16, 3/8, 1/2
Tube O.D. (mm):	4,6,8,10,12,14

**Recommended Tubing**  
 Prestolok nickel plated and composite fittings are designed to be used with the following Parker Hannifin Parflex Division tubing.

Tubing Series	Tubing Material
E	Linear Low Density Polyethylene
PP	Polypropylene
N	Plasticized Polyamide (Nylon)
NR	Unplasticized Polyamide (Rigid Nylon)
U	Polyurethane 90 Durometer Shore A
HU	Polyurethane 95 Durometer Shore A

Other materials for Prestolok inch sized nickel plated fittings: Polyurethane 85 Durometer Shore A



A compact one-piece push-to-connect fitting. Designed for low pressure circuits where assembly, disassembly and reassembly is important. Stainless steel grab ring grips the tubing to provide retention. Swivels are featured on all male pipe threaded shapes for installation in tight places and for precise positioning. Prestolok should not be used for live swivel applications. Prestolok fittings come with a pre-applied white acrylic sealant.

**CAUTION:** All current manufacturers of 85A PU tubing do not approve the use of push-to-connect fittings with their product.

Testing has shown acceptable use with certain O.D – I.D. combinations. Applications and service conditions vary and therefore the use of a tube support may be required for any 85A PU tubing.

The following commercially available O.D. – I.D. 85A tubing sizes require the use of a tube support regardless of application.

5/32" – 3/32"	3/16" – 1/8"	1/4" - .170"	1/4" – 3/16"
5/16" – 1/4"	3/8" – 5/16"	1/2" – 3/8"	

**Assembly Instructions**

1. Cut thermoplastic tubing squarely, using Parker Tube Cutter PTC-001. Be certain the port or mating part is clean and free of debris.
2. Insert tubing into fitting until it bottoms. A slight twisting motion will ease the insertion. Pull on tubing to verify it is properly retained in the fitting.
3. To disassemble, simply push the release button against the body and remove tubing.
4. It is recommended to trim the tubing after every disassembly to insure a proper seal.


H

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters




**62PLP Union**

Part No.	Tube Size (In.)	O.D.	L	Flow Dia. D
62PLP-2	1/8	.375	1.40	.094
62PLP-3	3/16	.437	1.41	.156
62PLP-5/32	5/32	.375	1.41	.125
62PLP-4	1/4	.500	1.43	.188
62PLP-5	5/16	.562	1.65	.250
62PLP-6	3/8	.625	1.66	.312
62PLP-8	1/2	.750	1.82	.375

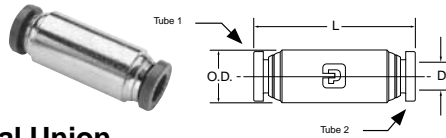


**62PLP Unequal Union**

Part No.	Tube 1 Size (In.)	Tube 2 Size (In.)	O.D.	L	Flow Dia. D
62PLP-5/32-2	5/32	1/8	.375	1.41	.094
62PLP-4-2	1/4	1/8	.500	1.43	.094
62PLP-4-5/32	1/4	5/32	.500	1.43	.125
62PLP-4-6	1/4	3/8	.625	1.66	.188
62PLP-6-8	3/8	1/2	.750	1.82	.312




**HPB Equal Union**

Part No.	Tube Size (mm)	L
HPB4	4	33.0
HPB5	5	34.5
HPB6	6	36.0
HPB8	8	38.0
HPB10	10	48.0
HPB12	12	48.0
HPB14	14	54.0

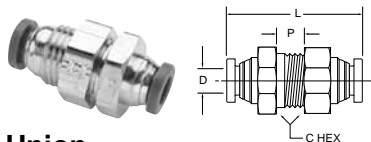

**62PLPBH Bulkhead Union**


Part No.	Tube Size (In.)	Bulkhead Hole Dia. B	C Hex	P Max.	I	D
62PLPBH-2	1/8	7/16	9/16	.39	1.40	.094
62PLPBH-5/32	5/32	7/16	9/16	.39	1.41	.125
62PLPBH-4	1/4	9/16	11/16	.29	1.43	.188
62PLPBH-5	5/16	5/8	3/4	.60	1.65	.250
62PLPBH-6	3/8	3/4	7/8	.54	1.66	.312
62PLPBH-8	1/2	7/8	1	.66	2.04	.375

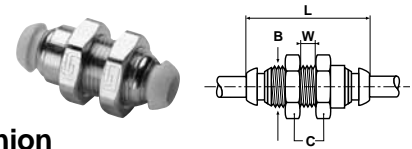

**WPB Bulkhead Union**


Part No.	Tube Size (mm)	B-mm Thread	C Hex	L	W	Bulkhead Hole Dia.
WPB4	4	M11x0.75	16	33	6	11mm
WPB6	6	M13x1	19	35	6	13mm
WPB8	8	M15x1.25	22	36	6	16mm
WPB10	10	M18x1	22	43	8	18mm
WPB12	12	M23x1.5	27	46	10	23mm
WPB14	14	M24x1.5	30	52	10	24mm

Jam nut is supplied loose in box




**WBMPB Mixed Bulkhead Union**

Part No.	Tube 1 Size (mm)	Tube 2 Size (mm)	B-mm Thread	C1	C2	C4	L	W	Bulkhead Hole Dia.
WBMPB4	4	4	M8x1	10	10	12	34	5	8mm
WBMPB6	6	6	M10x1	12	10	12	37	5	10mm
WBMPB8	8	8	M12x1	14	14	16	39	5	12mm
WBMPB10	10	10	M14x1	17	17	19	45	5	14mm
WBMPB12	12	12	M16x1	22	19	22	49	5	16mm
WBMPB14	14	14	M18x1	24	22	22	52	7	18mm




**66PLPBH Female Bulkhead**

Part No.	Tube Size (In.)	Pipe Thd (NPTF)	C Hex	P Max.	L	Flow Dia. D	Bkhd Hole Dia.
66PLPBH-5/32-4	5/32	1/4	11/16	.19	1.39	.125	1/2
66PLPBH-4-4	1/4	1/4	11/16	.24	1.35	.188	9/16
66PLPBH-6-6	3/8	3/8	1	.22	1.47	.312	7/8
66PLPBH-8-6	1/2	3/8	1 1/4	.35	1.56	.344	1



**WG4PB Bulkhead Union Female BSPP**


Part No.	Tube Size (mm)	BSPP	B2	C1 Hex	C2 Hex	J	L	W
WG4PB4-1/8	4	G1/8	M11x0.75	14	14	8	25.0	6
WG4PB6-1/8	6	G1/8	M13x1	17	17	8	25.0	6
WG4PB6-1/4	6	G1/4	M13x1	17	19	12	29.5	6
WG4PB8-1/8	8	G1/8	M15x1.25	19	17	8	25.0	6
WG4PB8-1/4	8	G1/4	M15x1.25	19	19	12	30.0	6
WG4PB10-3/8	10	G3/8	M18x1	22	22	12	34.0	8
WG4PB12-3/8	12	G3/8	M23x1.5	27	24	12	35.0	10
WG4PB12-1/2	12	G1/2	M23x1.5	27	27	14	40.0	10

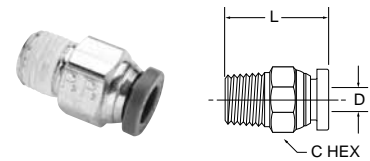

**W68PLP Male Connector**


Part No.	Tube Size (In.)	Pipe Thd (NPTF)	C Hex	I	Flow Dia. D
W68PLP-2-1	1/8	1/16	3/8	.79	.094
W68PLP-2-2	1/8	1/8	7/16	.79	.094
W68PLP-2-4	1/8	1/4	9/16	1.02	.094
W68PLP-3-2	3/16	1/8	7/16	.85	.156
W68PLP-3-4	3/16	1/4	9/16	1.01	.156
W68PLP-5/32-1	5/32	1/16		.88	.940
W68PLP-5/32-2	5/32	1/8	7/16	.80	.125
W68PLP-5/32-4	5/32	1/4	9/16	1.03	.125
W68PLP-4-1	1/4	1/16	1/2	1.07	.141
W68PLP-4-2	1/4	1/8	1/2	.89	.188
W68PLP-4-4	1/4	1/4	9/16	1.00	.188
W68PLP-4-6	1/4	3/8	3/4	1.04	.188
W68PLP-5-2	5/16	1/8	9/16	1.18	.250
W68PLP-5-4	5/16	1/4	9/16	1.04	.250
W68PLP-5-6	5/16	3/8	11/16	1.04	.250
W68PLP-6-2	3/8	1/8	5/8	1.21	.250
W68PLP-6-4	3/8	1/4	5/8	1.08	.312
W68PLP-6-6	3/8	3/8	11/16	1.02	.312
W68PLP-6-8	3/8	1/2	7/8	1.28	.312
W68PLP-8-4	1/2	1/4	13/16	1.44	.344
W68PLP-8-6	1/2	3/8	13/16	1.24	.344
W68PLP-8-8	1/2	1/2	7/8	1.35	.375
68PLP-5/32-4LT*	5/32	1/4-28	7/16	.88	.093

\*SAE-LT Threads




**66PLP Female Connector**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	L	Flow Dia. D
66PLP-2-2	1/8	1/8	9/16	1.17	.094
66PLP-2-4	1/8	1/4	11/16	1.34	.094
66PLP-3-2	3/16	1/8	9/16	1.13	.156
66PLP-5/32-2	5/32	1/8	9/16	1.17	.125
66PLP-5/32-4	5/32	1/4	11/16	1.38	.125
66PLP-4-2	1/4	1/8	9/16	1.17	.188
66PLP-4-4	1/4	1/4	11/16	1.38	.188
66PLP-5-2	5/16	1/8	9/16	1.25	.250
66PLP-5-4	5/16	1/4	11/16	1.45	.250
66PLP-6-4	3/8	1/4	11/16	1.46	.312
66PLP-6-6	3/8	3/8	13/16	1.51	.312



**68PLP-X-0 Male Connector**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	I	Flow Dia. D
68PLP-2-0	1/8	10x32	3/8	.92	.094
68PLP-5/32-0	5/32	10x32			
68PLP-4-0	1/4	10x32	1/2	.96	.094



**G4PB Female Connector BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex	L
G4PB4-1/8	4	1/8	14	26.0
G4PB6-1/8	6	1/8	14	27.5
G4PB6-1/4	6	1/4	17	33.0
G4PB8-1/8	8	1/8	17	29.0
G4PB8-1/4	8	1/4	17	33.0


**H**

Tubing

Prestolok Composite

Prestolok Metal


Pipe Fittings & Adapters



**68PLPR Round Body Male Connector**


Part No.	Tube Size (In.)	Thread Size NPTF	Internal Hex Broach	Body Dia. O.D.	L	Flow Dia.
68PLPR-2-0*	1/8	10-32	3/32	3/8"	.89	.094
68PLPR-5/32-0*	5/32	10-32	3/32	3/8"	.91	.094
68PLPR-4-0*	1/4	10-32	3/32	1/2"	.95	.094
W68PLPR-5/32-1	5/32	1/16	1/8	7/16"	.87	.125
W68PLPR-5/32-2	5/32	1/8	1/8	7/16"	.79	.125
W68PLPR-4-1	1/4	1/16	5/32	1/2"	1.06	.156
W68PLPR-4-2	1/4	1/8	3/16	1/2"	.88	.188
W68PLPR-4-4	1/4	1/4	3/16	5/8"	.99	.188

\*10-32 seal is neoprene




**PLPHBF4-B Male Connector BSSP**

Part No.	Tube Size (In.)	Pipe Thd BSSP	C Hex	I	Flow Dia. D
3-1/8PLPHBF4-B	3/16	1/8-28	11/16	.96	.156
3-1/4PLPHBF4-B	3/16	1/4-19	3/4	.97	.156
4-1/8PLPHBF4-B	1/4	1/8-28	11/16	1.13	.188
4-1/4PLPHBF4-B	1/4	1/4-19	3/4	1.13	.188
4-3/8PLPHBF4-B	1/4	3/8-19	7/8	1.13	.188
6-1/4PLPHBF4-B	3/8	1/4-19	3/4	1.26	.256
6-3/8PLPHBF4-B	3/8	3/8-19	7/8	1.26	.312
6-1/2PLPHBF4-B	3/8	1/2-14	1-1/16	1.26	.312
8-3/8PLPHBF4-B	1/2	3/8-19	7/8	1.41	.452
8-1/2PLPHBF4-B	1/2	1/2-14	1-1/16	1.37	.452




**FPB Male Connector NPT**

Part No.	Tube Size (mm)	NPT	C Hex	L	P	Int. Hex
W68PLP-5/32-2	4	1/8-27	7/16"	21.7	9.7	-
W68PLP-5/32-4	4	1/4-18	9/16"	28.1	14.2	-
FPB6-1/8	6	1/8-27	14	26.0	10.1	4
FPB6-1/4	6	1/4-18	14	28.5	14.6	4
FPB10-1/4	10	1/4-18	19	40.0	14.6	8
FPB10-3/8	10	3/8-18	19	34.0	14.6	8
FPB12-3/8	12	3/8-18	22	36.5	14.6	10



**F4PB Compact Male Connector BSSP**


Part No.	Tube Size (mm)	BSSP	C Hex	J	L
F4PB4-1/8	4	1/8	13	4.7	19.9
F4PB4-1/4	4	1/4	16	6.0	20.3
F4PB6-1/8	6	1/8	13	4.7	23.4
F4PB6-1/4	6	1/4	16	6.0	22.2
F4PB8-1/4	8	1/4	16	6.0	23.8
F4PB8-1/8	8	1/8	14	4.7	25.1
F4PB8-3/8	8	3/8	20	6.5	23.5
F4PB10-1/4	10	1/4	17	6.0	31.3
F4PB10-3/8	10	3/8	20	6.5	26.8
F4PB10-1/2	10	1/2	24	7.5	26.1
F4PB12-1/4	12	1/4	20	6.0	31.9
F4PB12-3/8	12	3/8	20	6.5	31.8
F4PB12-1/2	12	1/2	24	7.5	27.8
F4PB14-3/8	14	3/8	22	6.5	35.0
F4PB14-1/2	14	1/2	24	7.5	30.0



**F28PB Male Connector Metric Straight Thread**


Part No.	Tube Size (mm)	Thread (mm)	L
F28PB4M3	4	M3x0.5	24
F28PB4M5	4	M5x0.8	25
F28PB6M5	6	M5x0.8	25

This fitting has been designed for use where space is at a premium. It is assembled using the internal hexagon and an allen key.




**F8PB Male Connector Metric Straight Thread**

Part No.	Tube Size (mm)	Thread (mm)	C Hex	L
F8PB4M5	4	M5x0.8	10	26.6
F8PB4M10	4	M10x1	14	24.0
F8PB6M5	6	M5x0.8	12	27.8
F8PB6M10	6	M10x1	14	28.0
F8PB6M12	6	M12x1.5	17	23.5
F8PB8M12	8	M12x1.5	17	27.0
F8PB8M16	8	M16x1.5	22	28.0
F8PB8M22	8	M22x1.5	27	30.0




**164PLP Union Tee**

Part No.	Tube Size (In.)	L	Flow Dia. D
164PLP-2	1/8	.74	.094
164PLP-3	3/16	.82	.156
164PLP-5/32	5/32	.77	.125
164PLP-4	1/4	.85	.188
164PLP-5	5/16	.97	.250
164PLP-6	3/8	1.01	.250
164PLP-8	1/2	1.15	.375




**EPB 90° Union Elbow**

Part No.	Tube Size (mm)	C Hex	M
EPB4	4	10	18.0
EPB5	5	12	20.5
EPB6	6	12	20.0
EPB8	8	14	22.0
EPB10	10	17	28.0
EPB12	12	22	30.0
EPB14	14	25	35.0

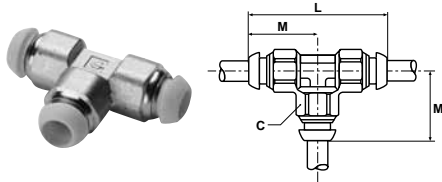

**JPB Union Tee**

Part No.	Tube Size (mm)	C	L	M
JPB4	4	10	36	18
JPB5	5	12	41	21
JPB6	6	12	40	20
JPB8	8	14	44	22
JPB10	10	17	56	28
JPB12	12	22	60	30
JPB14	14	25	68	34

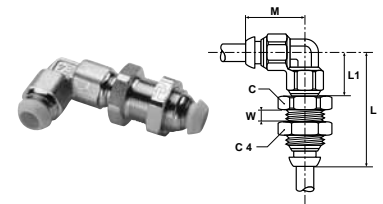

**WE6PB Adjustable Bulkhead Union Elbow**

Part No.	Tube Size (mm)	Thread B (mm)	C Hex	C4 Hex	L	L1	M	W	Bkhd Hole Dia.
WE6PB4	4	M11x0.75	14	16	37	18.0	18.0	6	11mm
WE6PB6	6	M13x1	17	17	39	19.5	20.5	6	13mm
WE6PB8	8	M15x1.25	19	19	43	21.5	22.5	6	15mm
WE6PB10	10	M18x1	22	22	54	22.8	28.5	8	18mm
WE6PB12	12	M23x1.5	27	27	59	30.0	30.0	10	23mm


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters



**165PLP Union Elbow**


Part No.	Tube Size (In.)	L	Flow Dia. D
165PLP-2	1/8	.74	.094
165PLP-5/32	5/32	.77	.125
165PLP-3	3/16	.82	.156
165PLP-4	1/4	.85	.188
165PLP-5	5/16	.97	.250
165PLP-6	3/8	1.01	.312
165PLP-8	1/2	1.15	.375

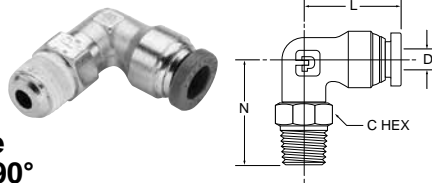

**W169PLP Male Elbow Swivel 90°**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	I	N	Flow ia. D
W169PLP-2-1	1/8	1/16	3/8	.74	.93	.160
W169PLP-2-2	1/8	1/8	7/16	.74	.92	.094
169PLP-2-0*	1/8	10-32	3/8	.74	.74	.080
W169PLP-2-4	1/8	1/4	9/16	.74	1.10	.094
W169PLP-3-2	3/16	1/8	7/16	.82	.92	.156
W169PLP-5/32-1	5/32	1/16	3/8	.84	.93	.160
W169PLP-5/32-2	5/32	1/8	7/16	.77	.92	.125
W169PLP-5/32-4	5/32	1/4	9/16	.77	1.10	.125
169PLP-5/32-0*	5/32	10-32	3/8	.85	.74	.080
W169PLP-4-1	1/4	1/16	3/8	.84	.93	.160
W169PLP-4-2	1/4	1/8	7/16	.85	.92	.156
W169PLP-4-4	1/4	1/4	9/16	.85	1.10	.156
W169PLP-4-6	1/4	3/8	11/16	.85	1.19	.156
169PLP-4-0*	1/4	10-32	3/8	.85	.74	.080
W169PLP-5-2	5/16	1/8	9/16	.97	1.02	.250
W169PLP-5-4	5/16	1/4	9/16	.97	1.24	.250
W169PLP-6-2	3/8	1/8	9/16	1.01	1.02	.250
W169PLP-6-4	3/8	1/4	9/16	1.01	1.24	.250
W169PLP-6-6	3/8	3/8	11/16	1.01	1.24	.250
W169PLP-6-8	3/8	1/2	7/8	1.01	1.48	.250
W169PLP-8-4	1/2	1/4	9/16	1.15	1.28	.312
W169PLP-8-6	1/2	3/8	11/16	1.15	1.31	.312
W169PLP-8-8	1/2	1/2	7/8	1.15	1.52	.312


\*10-32 seal is neoprene

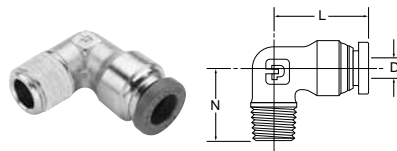

**W169PLPNS Male Elbow 90°**


Part No.	Tube Size (In.)	Pipe Thread (NPTF)	L	N	Flow Dia. D
W169PLPNS-2-2	1/8	1/8	.74	.67	.094
W169PLPNS5/32-2	5/32	1/8	.77	.67	.125
W169PLPNS5/32-4	5/32	1/4	.77	.87	.125
W169PLPNS-4-2	1/4	1/8	.85	.67	.188
W169PLPNS-4-4	1/4	1/4	.85	.87	.188
W169PLPNS-5-2	5/16	1/8	.97	.75	.234
W169PLPNS-5-4	5/16	1/4	.97	.94	.250
W169PLPNS-6-4	3/8	1/4	1.01	.94	.312
W169PLPNS-6-6	3/8	3/8	1.01	1.01	.312
W169PLPNS-6-8	3/8	1/2	1.01	1.27	.312
W169PLPNS-8-6	1/2	3/8	1.15	1.00	.375
W169PLPNS-8-8	1/2	1/2	1.15	1.27	.375
169PLPNS532-4LT*	5/32	1/4-28	.60	.48	.090

\* SAE-LT Threads

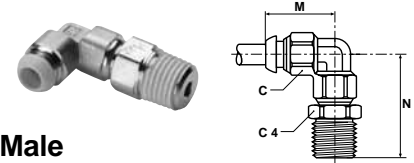

**C6PB Adjustable Male Elbow NPT**

Part No.	Tube Size (mm)	NPT	C Hex	C4 Hex	M	N
C6PB6-1/4	6	1/4-18	12	14	20	36.0
C6PB6-3/8	6	3/8-18	12	19	20	36.5
C6PB10-1/4	10	1/4-18	17	16	28	41.5
C6PB10-3/8	10	3/8-18	17	19	28	41.5
C6PB12-1/2	12	1/2-14	22	22	30	47.5

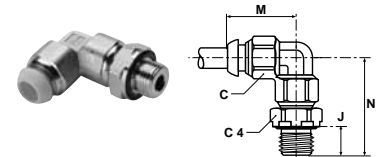

**C64PB Adjustable Male Elbow BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex	C4 Hex	J	M	N
C64PB4-1/8	4	1/8	10	13	4.7	18	23.4
C64PB4-1/4	4	1/4	10	16	6.0	18	25.2
C64PB6-1/8	6	1/8	12	13	4.7	20	26.1
C64PB6-1/4	6	1/4	12	16	6.0	20	26.4
C64PB8-1/8	8	1/8	14	13	4.7	22	28.1
C64PB8-1/4	8	1/4	14	16	6.0	22	28.4
C64PB8-3/8	8	3/8	14	20	6.5	22	30.6
C64PB10-1/4	10	1/4	17	16	6.0	28	34.9
C64PB10-3/8	10	3/8	17	20	6.5	28	37.4
C64PB12-1/4	12	1/4	22	19	6.0	30	36.5
C64PB12-3/8	12	3/8	22	22	6.5	30	39.0
C64PB12-1/2	12	1/2	22	24	7.5	30	38.5
C64PB14-3/8	14	3/8	25	22	6.5	34	44.7
C64PB14-1/2	14	1/2	25	24	7.5	34	44.3

**H**


Tubing

Prestolok Composite

Prestolok Metal


Pipe Fittings & Adapters






**C64SPB Compact Adjustable Male Elbow BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex	J	M	N
C64SPB4-1/8	4	1/8	13	4.7	17	17.3
C64SPB6-1/8	6	1/8	13	4.7	22	17.3
C64SPB6-1/4	6	1/4	16	6.0	22	19.1
C64SPB8-1/8	8	1/8	13	4.7	24	16.9
C64SPB8-1/4	8	1/4	16	6.0	24	18.7
C64SPB8-3/8	8	3/8	20	6.5	24	20.7
C64SPB10-1/4	10	1/4	16	6.0	29	20.5
C64SPB10-3/8	10	3/8	20	6.5	29	22.5
C64SPB12-1/4	12	1/8	16	6.0	31	20.5
C64SPB12-3/8	12	3/8	20	6.5	31	23.2
C64SPB12-1/2	12	1/2	24	7.5	31	25.2

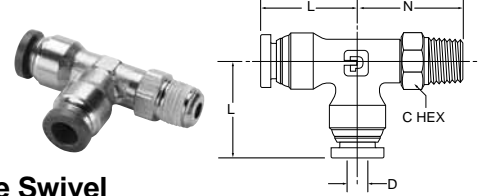


**W171PLP Male Run Tee Swivel**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	L	N	Flow Dia. D
W171PLP-2-2	1/8	1/8	7/16	.74	.92	.094
W171PLP-5/32-2	5/32	1/8	7/16	.77	.92	.125
W171PLP-4-2	1/4	1/8	7/16	.85	.92	.156
W171PLP-4-4	1/4	1/4	9/16	.85	1.10	.156
W171PLP-4-6	1/4	3/8	11/16	.85	1.24	.156
W171PLP-5-2	5/16	1/8	9/16	.97	1.02	.250
W171PLP-5-4	5/16	1/4	9/16	.97	1.24	.250
W171PLP-6-4	3/8	1/4	9/16	1.01	1.24	.250
W171PLP-6-6	3/8	3/8	11/16	1.01	1.24	.250
W171PLP-8-6	1/2	3/8	11/16	1.15	1.31	.312
W171PLP-8-8	1/2	1/2	7/8	1.15	1.52	.312




**C68PB Adjustable Male Elbow Metric Straight Thread**

Part No.	Tube Size (mm)	Thread (mm)	C Hex	C4 Hex	M	N
C68PB4M5	4	M5x0.8	11	10	17	18
C68PB6M5	6	M5x0.8	11	10	17	18

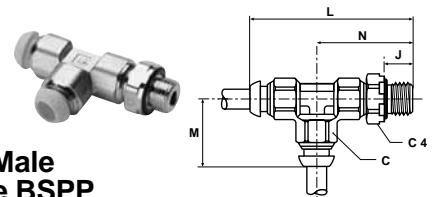


**R64PB Swivel Male Branch Run Tee BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex	C4 Hex	J	L	M	N
R64PB4-1/8	4	1/8	10	13	4.7	41.4	18	23.4
R64PB4-1/4	4	1/4	10	16	6.0	43.2	18	25.2
R64PB6-1/8	6	1/8	12	13	4.7	46.1	20	26.1
R64PB6-1/4	6	1/4	12	16	6.0	46.4	20	26.4
R64PB8-1/8	8	1/8	14	13	4.7	50.1	22	28.1
R64PB8-1/4	8	1/4	14	16	6.0	50.4	22	28.4
R64PB8-3/8	8	3/8	14	20	6.5	52.6	22	30.6
R64PB10-1/4	10	1/4	17	16	6.0	62.9	28	34.9
R64PB10-3/8	10	3/8	17	20	6.5	65.4	28	37.4
R64PB12-1/4	12	1/4	22	19	6.0	65.5	29	36.5
R64PB12-3/8	12	3/8	22	22	6.5	68.0	29	39.0
R64PB14-3/8	14	3/8	25	22	6.5	78.7	34	44.7
R64PB14-1/2	14	1/2	25	24	7.5	78.3	34	44.3



**C68SPB Compact Adjustable Male Elbow Metric Straight Thread**

Part No.	Tube Size (mm)	Thread (mm)	C Hex	J	M	N
C68SPB4M5	4	M5x0.8	12.5	5	17	18
C68SPB6M5	6	M5x0.8	12.5	5	17	18

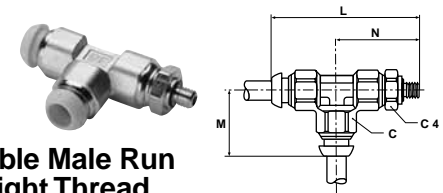

**R68PB Adjustable Male Run Tee Metric Straight Thread**

Part No.	Tube Size (mm)	Thread (mm)	C Hex	C4 Hex	L	M	N
R68PB4M3	4	M3x0.5	10	10	41.0	18	23.0
R68PB4M5	4	M5x0.8	10	10	42.5	18	24.5
R68PB6M5	6	M5x0.8	12	11	45.5	20	25.5


**H**

Tubing

Prestolok Composite


Prestolok Metal

Pipe Fittings & Adapters

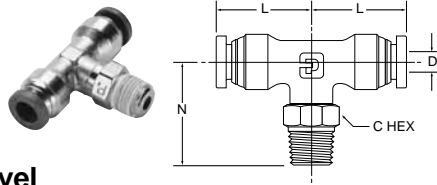


**W172PLP Male Branch Tee Swivel**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	L	N	Flow Dia. D
W172PLP-2-2	1/8	1/8	7/16	.74	.92	.094
W172PLP-3-2	3/16	1/8	7/16	.82	.92	.156
W172PLP-5/32-2	5/32	1/8	7/16	.77	.92	.125
W172PLP-4-2	1/4	1/8	7/16	.85	.92	.156
W172PLP-4-4	1/4	1/4	9/16	.85	1.10	.156
W172PLP-4-6	1/4	3/8	11/16	.85	1.10	.156
W172PLP-5-2	5/16	1/8	9/16	.97	1.02	.250
W172PLP-5-4	5/16	1/4	9/16	.97	1.24	.250
W172PLP-6-4	3/8	1/4	9/16	1.01	1.24	.250
W172PLP-6-6	3/8	3/8	11/16	1.01	1.24	.250
W172PLP-8-4	1/2	1/4	9/16	1.15	1.30	.312
W172PLP-8-6	1/2	3/8	11/16	1.15	1.31	.312
W172PLP-8-8	1/2	1/2	7/8	1.15	1.52	.312

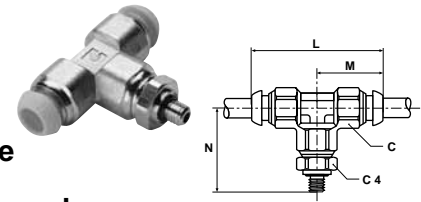


**S68PB Adjustable Male Branch Tee Metric Straight Thread**

Part No.	Tube Size (mm)	Thread (mm)	C Hex	C4 Hex	L	M	N
S68PB4M3	4	M3X0.5	10	10	36	18	23.0
S68PB4M5	4	M5X0.8	10	10	36	18	24.5
S68PB6M5	6	M5X0.8	12	11	40	20	25.5




**TEPB Tube End Expander**

Part No.	Tube 1 Size (mm)	Tube 2 Size (mm)	L
TEPB4-6	4	6	39

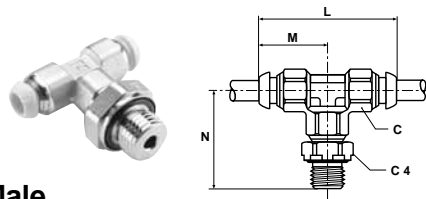


**S64PB Swivel Male Branch Tee BSPP**

Part No.	Tube Size (mm)	BSPP	C Hex	C4 Hex	L	M	N
S64PB4-1/8	4	1/8	10	13	36	18	23.4
S64PB4-1/4	4	1/4	10	16	36	18	25.2
S64PB6-1/8	6	1/8	12	13	40	20	26.1
S64PB6-1/4	6	1/4	12	16	40	20	26.4
S64PB8-1/8	8	1/8	14	13	44	22	28.1
S64PB8-1/4	8	1/4	14	16	44	22	28.4
S64PB8-3/8	8	3/8	14	20	44	22	30.6
S64PB10-1/4	10	1/4	17	16	56	28	34.9
S64PB10-3/8	10	3/8	17	20	56	28	37.4
S64PB12-1/4	12	1/4	22	19	58	29	36.5
S64PB12-3/8	12	3/8	22	22	58	29	39.0
S64PB14-3/8	14	3/8	25	22	68	34	44.7
S64PB14-1/2	14	1/2	25	24	68	34	44.3




**TRPB Tube End Reducer**

Part No.	Tube 1 Size (mm)	Tube 2 Size (mm)	L
TRPB6-4	6	4	40.0
TRPB8-4	8	4	39.5
TRPB8-6	8	6	41.5
TRPB10-4	10	4	37.0
TRPB10-6	10	6	43.0
TRPB10-8	10	8	47.5
TRPB12-6	12	6	38.0
TRPB12-8	12	8	44.0
TRPB12-10	12	10	52.0
TRPB14-8	14	8	41.0
TRPB14-10	14	10	51.0
TRPB14-12	14	12	55.0



**FNPB Plug**

Part No.	Tube Size (mm)	L
FNPB4	4	27
FNPB6	6	27
FNPB8	8	30
FNPB10	10	30
FNPB12	12	35
FNPB14	14	36




**66PW Female Connector (Nickel Plated)**

Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	L	Flow Dia. D
66PW-4-2	1/4	1/8	9/16	1.17	.188
66PW-4-4	1/4	1/4	11/16	1.38	.188
66PW-5-2	5/16	1/8	9/16	1.25	.250
66PW-5-4	5/16	1/4	11/16	1.45	.250
66PW-6-4	3/8	1/4	11/16	1.46	.312
66PW-6-6	3/8	3/8	13/16	1.51	.312



**DB Dust/Weld Spatter Boot**

Part No.	Tube Size (In.)	L	D
DB-4	1/4	.50	.53
DB-6	3/8	.50	.76
DB-8	1/2	.50	.88



**66PWBH Female Bulkhead (Nickel Plated)**

Part No.	Tube Size (In.)	Thread (NPTF)	C Hex	P Max.	L	Flow Dia. D	Bulkhead Hole Dia.
66PWBH-4-4	1/4	1/4	11/16	.24	1.35	.188	9/16
66PWBH-6-6	3/8	3/8	1	.22	1.47	.312	7/8
66PWBH-8-6	1/2	3/8	1 1/4	.35	1.56	.344	1


**H**

Tubing

Prestolok Composite

Prestolok Metal


Pipe Fittings & Adapters




**62PW Union (Nickel Plated)**

Part No.	Tube Size (In.)	O.D.	L	Flow Dia. D
62PW-4	1/4	.500	1.43	.188
62PW-5	5/16	.562	1.65	.250
62PW-6	3/8	.625	1.66	.312
62PW-8	1/2	.750	1.82	.375

**W68PW Male Connector (Nickel Plated)**




Part No.	Tube Size (In.)	Thread (NPTF)	C Hex	L	Flow Dia. D
W68PW-4-2	1/4	1/8	1/2	.89	.188
W68PW-4-4	1/4	1/4	9/16	1.00	.188
W68PW-4-6	1/4	3/8	3/4	1.04	.188
W68PW-5-2	5/16	1/8	9/16	1.18	.250
W68PW-5-4	5/16	1/4	9/16	1.04	.250
W68PW-5-6	5/16	3/8	11/16	1.04	.250
W68PW-6-2	3/8	1/8	5/8	1.21	.250
W68PW-6-4	3/8	1/4	5/8	1.08	.312
W68PW-6-6	3/8	3/8	11/16	1.02	.312
W68PW-6-8	3/8	1/2	7/8	1.28	.312
W68PW-8-4	1/2	1/4	13/16	1.44	.344
W68PW-8-6	1/2	3/8	13/16	1.24	.344
W68PW-8-8	1/2	1/2	7/8	1.35	.375



**62PWBH Bulkhead Union (Nickel Plated)**


Part No.	Tube Size (In.)	Bulkhead Hole Dia. B	C Hex	P Max.	L	D
62PWBH-4	1/4	9/16	11/16	.29	1.43	.188
62PWBH-5	5/16	5/8	3/4	.60	1.65	.250
62PWBH-6	3/8	3/4	7/8	.54	1.66	.312
62PWBH-8	1/2	7/8	1	.66	2.04	.375

**164PW Union Tee (Nickel Plated)**




Part No.	Tube Size (In.)	L	Flow Dia. D
164PW-4	1/4	.85	.188
164PW-5	5/16	.97	.250
164PW-6	3/8	1.01	.250
164PW-8	1/2	1.15	.375

**W171PW Male Run Tee Swivel (Nickel Plated)**

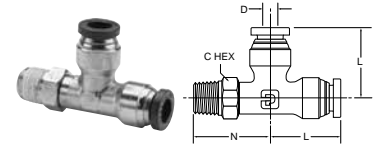


Part No.	Tube Size (In.)	Pipe Thread (NPTF)	C Hex	L	N	Flow Dia. D
W171PW-4-2	1/4	1/8	7/16	.85	.92	.156
W171PW-4-4	1/4	1/4	9/16	.85	1.10	.156
W171PW-4-6	1/4	3/8	11/16	.85	1.24	.156
W171PW-5-2	5/16	1/8	9/16	.97	1.02	.250
W171PW-5-4	5/16	1/4	9/16	.97	1.24	.250
W171PW-6-4	3/8	1/4	9/16	1.01	1.24	.250
W171PW-6-6	3/8	3/8	11/16	1.01	1.24	.250
W171PW-8-6	1/2	3/8	11/16	1.15	1.31	.312
W171PW-8-8	1/2	1/2	7/8	1.15	1.52	.312

**165PW Union Elbow (Nickel Plated)**




Part No.	Tube Size (In.)	L	Flow Dia. D
165PW-4	1/4	.85	.188
165PW-5	5/16	.97	.250
165PW-6	3/8	1.01	.312
165PW-8	1/2	1.15	.375

**W172PW Male Branch Tee Swivel (Nickel Plated)**




Part No.	Pipe Size (In.)	Thread (NPTF)	C Hex	L	N	Flow Dia. D
W172PW-4-2	1/4	1/8	7/16	.85	.92	.156
W172PW-4-4	1/4	1/4	9/16	.85	1.10	.156
W172PW-4-6	1/4	3/8	11/16	.85	1.10	.156
W172PW-5-2	5/16	1/8	9/16	.97	1.02	.250
W172PW-5-4	5/16	1/4	9/16	.97	1.24	.250
W172PW-6-4	3/8	1/4	9/16	1.01	1.24	.250
W172PW-6-6	3/8	3/8	11/16	1.01	1.24	.250
W172PW-8-4	1/2	1/4	9/16	1.15	1.30	.312
W172PW-8-6	1/2	3/8	11/16	1.15	1.31	.312
W172PW-8-8	1/2	1/2	7/8	1.15	1.52	.312

**W169PW Male Elbow Swivel 90° (Nickel Plated)**


































Part No.	Pipe Size (In.)	Thread (NPTF)	C Hex	L	N	Flow Dia. D
W169PW-4-2	1/4	1/8	7/16	.85	.92	.156
W169PW-4-4	1/4	1/4	9/16	.85	1.10	.156
W169PW-4-6	1/4	3/8	11/16	.85	1.19	.156
W169PW-5-2	5/16	1/8	9/16	.97	1.02	.250
W169PW-5-4	5/16	1/4	9/16	.97	1.24	.250
W169PW-6-2	3/8	1/8	9/16	1.01	1.02	.250
W169PW-6-4	3/8	1/4	9/16	1.01	1.24	.250
W169PW-6-6	3/8	3/8	11/16	1.01	1.24	.250
W169PW-6-8	3/8	1/2	7/8	1.01	1.48	.250
W169PW-8-4	1/2	1/4	9/16	1.15	1.28	.312
W169PW-8-6	1/2	3/8	11/16	1.15	1.31	.312
W169PW-8-8	1/2	1/2	7/8	1.15	1.52	.312

**HPB Equal Union**



Part No.	Tube Size (mm)	L
HPB6	6	36.0
HPB8	8	38.0
HPB10	10	48.0
HPB12	12	48.0

<b>H</b>	<b>Tubing</b>	<b>Prestolok Composite</b>	<b>Prestolok Metal</b>	<b>Pipe Fittings &amp; Adapters</b>	<b>Industrial Pipe Fittings</b>	<b>207ACBH</b> Anchor Coupling  Page H40	<b>207P</b> Pipe Coupling  Page H40	<b>208P</b> Reducer Coupling  Page H40	<b>209P</b> Pipe Bushing  Page H40	<b>210P</b> Lock Nut  Page H40
					<b>211P</b> Square-head Plug  Page H40	<b>212P</b> Union  Page H40	<b>213P</b> Cap  Page H41	<b>215PN</b> Close Nipple  Page H41	<b>215PNL</b> Long Nipple  Page H41	<b>216P</b> Hex Nipple  Page H41
					<b>218P</b> Hex-Head Plug  Page H41	<b>219P</b> Countersunk Plug  Page H41	<b>220P</b> Slotted-Head Plug  Page H42	<b>222P</b> Adapter  Page H42	<b>1200P-2200P</b> Union Elbow  Page H42	<b>1202P-2202P</b> Street Elbow  Page H42
					<b>1203P-2203P</b> Union Tee  Page H42	<b>1204P</b> Male Elbow  Page H42	<b>2224P</b> Male Branch Tee  Page H43	<b>2225P</b> Street Tee  Page H43	<b>1201P-2201P</b> 45° Female Elbow  Page H43	<b>2205P</b> Cross  Page H43
					<b>2214P</b> 45° Street Elbow  Page H43	<b>Metric Adapters BSP</b>	<b>DD44</b> 90° Elbow  Page H45	<b>FF44</b> BSPP Hex Nipple  Page H45	<b>FHG4</b> Adapter Male-BSPP  Page H45	<b>GG44</b> Pipe Connector  Page H45
					<b>KMM004</b> BSPP Cross  Page H45	<b>MM0444</b> Pipe Tee  Page H45	<b>WGG44</b> Bulkhead Female Union  Page H45			

**Features**

MATERIALS OF CONSTRUCTION	
Fittings:	CA345, CA360, CA377

NOMENCLATURE	
EXAMPLE: 2214P-2-2	ATTRIBUTE:
2	Extrusion
1 (not shown)	Forging
214	45° Street Elbow
p	Pipe
2	1/8" Pipe Thread
2	1/8" Pipe Thread

APPLICABLE TUBE	
Tube Material:	Copper, brass, iron pipe
Thread size:	1/8, 1/4, 3/8, 1/2, 3/4, 1

SPECIFICATIONS	
Pressure Range:	Up to 1,000 PSI
Temperature Ranges:	-65° to +250°F




All pipe fittings meet functional requirements of SAE J530 and SAE J531. Threads are made to Dryseal standards.

**Pipe thread assembly guide (turns method) for Dryseal threads with pre-applied Vibra Seal**


**Straight Fittings**

1. Tighten external thread into the internal thread.
2. Tighten an additional 2 revolutions with a wrench up to 1/2 in. male pipe thread. Above 1/2 in., 1-1/2 to 2-1/2 revolutions.

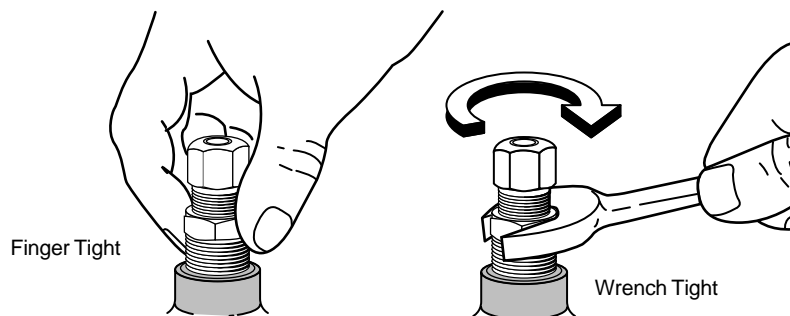


**Elbow or Tee Fittings**

1. Tighten external thread into the internal thread.
2. Tighten an additional 1 to 1-1/2 revolutions with a wrench.
3. Tighten fitting, Clockwise, to Align with Tubing (never counter clockwise).

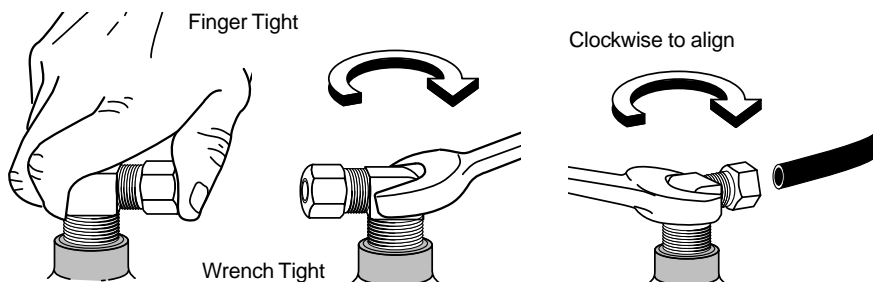

Note: To minimize the possibility of a leaking threaded joint after assembling male to female pipe threads, neither end should be backed out (loosened) once the assembly has been made.


H
Tubing
Presolok Composite
Presolok Metal
Pipe Fittings & Adapters



**207ACBH Anchor Coupling**


PART NO.	FEMALE PIPE THREAD	STRAIGHT THREAD	MAX. BULK HEAD P	B HEX	C HEX	L	BLKHD HOLE DIA. H	FLOW DIA. D
207ACBH-2	1/8	5/8-18	.89	7/8	15/16	1.50	5/8	.339
207ACBHS-2	1/8	5/8-18	.35	7/8	15/16	.96	5/8	.339
207ACBH-4	1/4	3/4-16	.81	1	1-1/8	1.50	3/4	.441
207ACBHS-4	1/4	3/4-16	.26	1	1	.94	3/4	.441
207ACBH-6	3/8	1-14	.62	1-1/8	1-1/4	1.31	1	.571
207ACBH-8	1/2	1-1/8-14	.75	1-1/4	1-3/8	1.50	1-1/8	.703
207ACBH-12	3/4	1-5/16-12	.65	1-1/2	1-1/2	1.50	1-5/16	.906
207ACBH-16*	1	1-5/8-14	1.00	2	2	1.68	1-5/8	1.140

\*Lock Washer not Available




**209P Bushing**

PART NO.	1 PIPE THREAD	2 PIPE THREAD	C HEX	L	FLOW DIA. D
209P-4-2	1/8	1/4	9/16	.75	.339
209P-6-2	1/8	3/8	11/16	.75	.339
209P-6-4	1/4	3/8	3/4	.75	.441
209P-8-2	1/8	1/2	7/8	1.00	.339
209P-8-4	1/4	1/2	7/8	1.00	.441
209P-8-6	3/8	1/2	7/8	1.00	.571
209P-12-2	1/8	3/4	1-1/8	1.00	.339
209P-12-4	1/4	3/4	1-1/8	1.00	.441
209P-12-6	3/8	3/4	1-1/8	1.00	.571
209P-12-8	1/2	3/4	1-1/8	1.00	.703
209P-16-8	1/2	1	1-3/8	1.31	.703
209P-16-12	3/4	1	1-3/8	1.31	.906




**207P Coupling**

PART NO.	PIPE THREAD	C HEX	L	FLOW DIA. D
207P-2	1/8	9/16	.75	.339
207P-4	1/4	3/4	1.12	.441
207P-6	3/8	7/8	1.12	.571
207P-8	1/2	1-1/16	1.50	.703
207P-12	3/4	1-3/8	1.53	.906




**210P Lock Nut**

PART NO.	PIPE THREAD	C HEX	L
210P-2	1/8 NPSL	11/16	.19
210P-4	1/4 NPSL	7/8	.25
210P-6	3/8 NPSL	1	.25
210P-8	1/2 NPSL	1-1/8	.25




**208P Reducer Coupling**

PART NO.	1 PIPE THREAD	2 PIPE THREAD	C HEX	L	FLOW DIA. D
208P-4-2	1/4	1/8	3/4	.97	.339
208P-6-4	3/8	1/4	7/8	1.16	.441
208P-8-4	1/2	1/4	1-1/16	1.28	.441
208P-8-6	1/2	3/8	1-1/16	1.38	.571
208P-12-6	3/4	3/8	1-3/8	1.32	.571
208P-12-8	3/4	1/2	1-3/8	1.50	.703



**211P Square-Head Plug**

PART NO.	PIPE THREAD	C	L	M
211P-2	1/8	9/32	.59	.25
211P-4	1/4	3/8	.80	.29
211P-6	3/8	7/16	.83	.32
211P-8	1/2	9/16	1.07	.39
211P-12	3/4	5/8	1.14	.45



**212P Union**

PART NO.	PIPE THREAD	C HEX	L	D
212P-4	1/4	1-3/16	1.54	.441
212P-6	3/8	1-1/4	1.76	.571

**H**


Tubing

Prestolok Composite

Prestolok Metal


Pipe Fittings & Adapters






**213P Cap**

PART NO.	PIPE THREAD	C HEX	L
213P-2	1/8	9/16	.50
213P-4	1/4	11/16	.63
213P-6	3/8	13/16	.63
213P-8	1/2	1-1/16	.87
213P-12	3/4	1-1/4	.89




**216P Hex Nipple**

PART NO.	PIPE THREAD	C HEX	L	FLOW DIA. D
216P-2	1/8	7/16	.97	.220
216P-4	1/4	9/16	1.38	.314
216P-6	3/8	11/16	1.41	.440
216P-8	1/2	7/8	1.81	.564
216P-12	3/4	1-1/16	1.81	.752




**215PN Close Nipple**

PART NO.	PIPE THREAD	L	FLOW DIA. D
215PN-2	1/8	.75	.281
215PN-4	1/4	.88	.375
215PN-6	3/8	1.00	.500
215PN-8	1/2	1.13	.625
215PN-12	3/4	1.31	.750




**216P Hex Nipple Reducers**

PART NO.	1 PIPE THREAD	2 PIPE THREAD	C HEX	L	FLOW DIA. D
216P-4-2	1/4	1/8	9/16	1.19	.220
216P-6-2	3/8	1/8	11/16	1.22	.220
216P-6-4	3/8	1/4	11/16	1.41	.314
216P-8-4	1/2	1/4	7/8	1.62	.314
216P-8-6	1/2	3/8	7/8	1.62	.440
216P-12-8	3/4	1/2	1-1/16	1.80	.564




**215PNL Long Nipple**

PART NO.	PIPE THREAD	L	FLOW DIA. D
215PNL-2-15	1/8	1-1/2	.250
215PNL-4-15	1/4	1-1/2	.375
215PNL-6-15	3/8	1-1/2	.500
215PNL-8-15	1/2	1-1/2	.625
215PNL-2-20	1/8	2	.250
215PNL-4-20	1/4	2	.375
215PNL-6-20	3/8	2	.500
215PNL-8-20	1/2	2	.625
215PNL-2-25	1/8	2-1/2	.250
215PNL-4-25	1/4	2-1/2	.375
215PNL-6-25	3/8	2-1/2	.500
215PNL-8-25	1/2	2-1/2	.625
215PNL-2-30	1/8	3	.250
215PNL-4-30	1/4	3	.375
215PNL-6-30	3/8	3	.500
215PNL-8-30	1/2	3	.625
215PNL-2-35	1/8	3-1/2	.250
215PNL-4-35	1/4	3-1/2	.375
215PNL-6-35	3/8	3-1/2	.500
215PNL-8-35	1/2	3-1/2	.625




**218P Hex-Head Plug**

PART NO.	PIPE THREAD	C HEX	L
218P-2	1/8	7/16	.560
218P-4	1/4	9/16	.747
218P-6	3/8	11/16	.780
218P-8	1/2	7/8	.970
218P-12	3/4	1-1/16	1.054




**219P Countersunk Hex-Head Plug**

PART NO.	PIPE THREAD	C HEX	L
219P-2	1/8	3/16	.30
219P-4	1/4	1/4	.46
219P-6	3/8	5/16	.46
219P-8	1/2	3/8	.61
219P-12	3/4	9/16	.62




**220P Slotted-Head Plug**

PART NO.	PIPE THREAD	L
220P-2	1/8	.31
220P-4	1/4	.42
220P-6	3/8	.43



**222P Adapter**


PART NO.	1 PIPE THREAD	2 PIPE THREAD	C HEX	L	FLOW DIA. D
222P-2-2	1/8	1/8	9/16	.88	.220
222P-4-2	1/4	1/8	3/4	1.06	.220
222P-4-4	1/4	1/4	3/4	1.25	.314
222P-6-2	3/8	1/8	7/8	1.10	.220
222P-6-4	3/8	1/4	7/8	1.25	.314
222P-6-6	3/8	3/8	7/8	1.25	.440
222P-8-4	1/2	1/4	1	1.47	.314
222P-8-6	1/2	3/8	1-1/16	1.47	.440
222P-8-8	1/2	1/2	1-1/16	1.66	.564
222P-12-6	3/4	3/8	1-3/8	1.50	.440
222P-12-8	3/4	1/2	1-3/8	1.69	.564
222P-12-12	3/4	3/4	1-3/8	1.69	.752

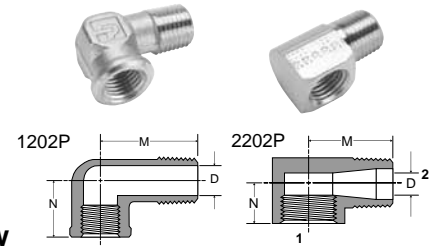

**1202P-2202P  
90° Street Elbow**


PART NO.	1 PIPE THREAD	2 PIPE THREAD	M	N	FLOW DIA. D
1202P-2-2	1/8	1/8	.81	.56	.22
2202P-2-2	1/8	1/8	.62	.48	.22
2202PA-2-2*	1/8	1/8	.66	.48	.22
2202P-4-2	1/4	1/8	.72	.45	.23
1202P-4-4	1/4	1/4	1.08	.69	.31
2202P-4-4	1/4	1/4	.91	.45	.34
2202PA-4-4*	1/4	1/4	.91	.72	.31
2202P-4-6	1/4	3/8	.97	.78	.43
1202P-6-4	3/8	1/4	1.25	.78	.31
1202P-6-6	3/8	3/8	1.25	.78	.42
2202P-6-6	3/8	3/8	.98	.54	.41
2202PA-6-6*	3/8	3/8	.97	.78	.43

\*Meets SAE Dimensions

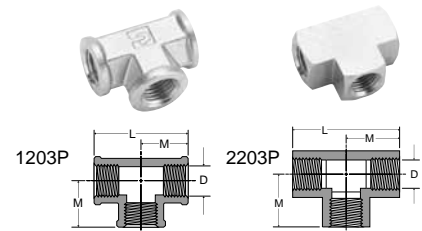


**1203P-2203P  
Union Tee**

PART NO.	PIPE THREAD	L	M	FLOW DIA. D
1203P-2	1/8	1.12	.56	.339
2203P-2	1/8	1.06	.53	.339
1203P-4	1/4	1.38	.69	.441
2203P-4	1/4	1.52	.76	.441
2203P-6	3/8	1.68	.84	.571
1203P-8	1/2	2.14	1.07	.703
2203P-8	1/2	2.14	1.07	.703
2203P-12	3/4	2.28	1.14	.906

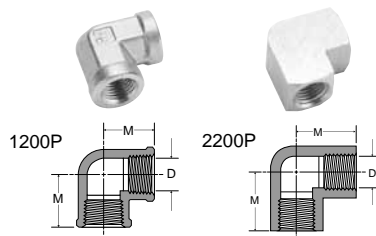

**1200P-2200P  
90° Union Elbow**

PART NO.	PIPE THREAD	M	FLOW DIA. D
1200P-2-2	1/8	.56	.329
2200P-2-2	1/8	.55	.339
1200P-4-4	1/4	.81	.441
2200P-4-4	1/4	.78	.441
1200P-6-6	3/8	.84	.571
2200P-6-6	3/8	.84	.571
2200P-8-8	1/2	1.07	.703



**1204P Male Elbow**

PART NO.	PIPE THREAD	M	FLOW DIA. D
1204P-2	1/8	.71	.220
1204P-4	1/4	1.09	.312
1204P-6	3/8	1.09	.408
1204P-8	1/2	1.41	.502


**H**

Tubing

Prestolok  
Composite


Prestolok  
Metal

Pipe Fittings  
& Adapters




**2224P Male Branch Tee**

PART NO.	PIPE THREAD	L	M	N	FLOW DIA. D
2224P-2	1/8	1.06	.53	.66	.220
2224P-4	1/4	1.52	.76	.91	.314
2224P-6	3/8	1.68	.84	.97	.440
2224P-8	1/2	2.18	1.09	1.25	.564
2224P-12	3/4	2.32	1.16	1.38	.752




**2205P Cross**

PART NO.	PIPE THREAD	M	FLOW DIA. D
2205P-2	1/8	.53	.339
2205P-4	1/4	.75	.441
2205P-6	3/8	.81	.571
2205P-8	1/2	1.07	.703
2205P-12	3/4	1.14	.906




**2225P Street Tee**

PART NO.	PIPE THREAD	M	N	FLOW DIA. D
2225P-2	1/8	.53	.66	.220
2225P-4	1/4	.76	.91	.314
2225P-6	3/8	.84	.98	.440
2225P-8	1/2	1.07	1.26	.564
2225P-12	3/4	1.14	1.38	.752



**2214P 45° Street Elbow**

PART NO.	PIPE THREAD	M	N	FLOW DIA. D
2214P-2-2	1/8	.38	.50	.220
2214P-4-4	1/4	.54	.70	.314
2214P-6-6	3/8	.56	.78	.440
2214P-8-8	1/2	.73	1.00	.564



**1201P-2201P**  
**45° Female Elbow**

PART NO.	PIPE THREAD	M	FLOW DIA. D
2201P-2-2	1/8	.43	.339
1201P-8-8	1/2	.89	.703

**H**

Tubing

Presolok  
Composite

Presolok  
Metal

Pipe Fittings  
& Adapters

**Features**

MATERIALS OF CONSTRUCTION	
Adapters:	Brass

APPLICABLE TUBE	
Tube Material:	Copper, brass, iron pipe
NPT:	1/8, 1/4, 3/8, 1/2
BSPT:	1/8, 1/4, 3/8, 1/2, 3/4, 1
BSPP:	1/8, 1/4, 3/8, 1/2, 3/4, 1

SPECIFICATIONS	
Pressure Range:	Up to 1,000 PSI
Temperature Ranges:	-65° to +250°F



A comprehensive range of adapters for NPT, BSPT and BSPP pipe threads. Produced in both forgings and extrusions. Parker brass adapters are produced from forgings and extrusions to meet exacting requirements. The hot forging process increases the density of the material, refines the grain structure and improves material strength.




Tubing

Prestolok  
Composite


Prestolok  
Metal

Pipe Fittings  
& Adapters




**DD44 Pipe 90° Elbow BSPP**

PART NO.	BSPP	C HEX	M
1/8DD44B	1/8	14	15
1/4DD44B	1/4	17	18
3/8DD44B	3/8	22	22
1/2DD44B	1/2	27	29




**FF44 Pipe Nipples BSPP**

PART NO.	BSPP	C HEX	L
1/8FF44B	1/8	14	19
1/4FF44B	1/4	17	22
3/8FF44B	3/8	22	24
1/2FF44B	1/2	27	31




**KMM004 Pipe Cross BSPP**

PART NO.	BSPP	C HEX	L	M
1/8KMM004B	1/8	14	29	14.5
1/4KMM004B	1/4	17	36	18.0
3/8KMM004B	3/8	22	44	22.0
1/2KMM004B	1/2	27	58	29.0




**FHG4 Adapter Male NPTF BSPP**

PART NO.	BSPP 1	NPTF 2	C HEX	L	FLOW D
1/8FHG4-B	1/8	1/8	0.562	0.87	.22
1/4FHG4-B	1/4	1/4	0.750	1.33	.31
3/8FHG4-B	3/8	3/8	0.875	1.44	.44
1/2FHG4-B	1/2	1/2	1.062	1.74	.56




**MM0444 Pipe Tee BSPP**

PART NO.	BSPP	C HEX	L	M
1/8MMO444B	1/8	14	29	14.5
1/4MMO444B	1/4	17	36	18.0
3/8MMO444B	3/8	22	44	22.0
1/2MMO444B	1/2	27	58	29.0
3/4MMO444B	3/4	32	62	31.0
1MMO444B	1	40	85	42.5




**GG44 Pipe Connector BSPP**

PART NO.	BSPP	C HEX	L
1/8GG44B	1/8	14	16
1/4GG44B	1/4	17	20
3/8GG44B	3/8	22	24
1/2GG44B	1/2	27	28
3/4GG44B	3/4	32	32
1GG44B	1	41	36



**WGG44 Bulkhead Female Union BSPP**

PART NO.	BSPP	STRAIGHT THREAD	C HEX	C4	L	W
1/8WGG44B	1/8	M16x1.5	19	22	21.5	12
1/4WGG44B	1/4	M20x1.5	24	24	22.0	12
3/8WGG44B	3/8	M23x1.5	27	27	24.0	12
1/2WGG44B	1/2	M27x1.5	32	32	28.0	14
3/4WGG44B	3/4	M34x1.5	41	41	31.0	13
1WGG44B	1	M45x2	55	55	36.0	12



**GG44 Unequal Pipe Connector BSPP**

PART NO.	BSPP 1	BSPP 2	C HEX	L
1/8x1/4GG44B	1/8	1/4	17	18
1/8x3/8GG44B	1/8	3/8	22	20
1/8x1/2GG44B	1/8	1/2	27	22
1/4x3/8GG44B	1/4	3/8	22	22
1/4x1/2GG44B	1/4	1/2	27	24
3/8x1/2GG44B	3/8	1/2	17	26

**Notes**

---

**H**

Tubing

Prestolok  
Composite

Prestolok  
Metal

Pipe Fittings  
& Adapters

**Safety Guide****Safety Guide For Selecting And Using Pneumatic Division Products And Related Accessories****⚠ WARNING:**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF PNEUMATIC DIVISION PRODUCTS, ASSEMBLIES OR RELATED ITEMS (“PRODUCTS”) CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE. POSSIBLE CONSEQUENCES OF FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THESE PRODUCTS INCLUDE BUT ARE NOT LIMITED TO:**

- Unintended or mistimed cycling or motion of machine members or failure to cycle
- Work pieces or component parts being thrown off at high speeds.
- Failure of a device to function properly for example, failure to clamp or unclamp an associated item or device.
- Explosion
- Suddenly moving or falling objects.
- Release of toxic or otherwise injurious liquids or gasses.

Before selecting or using any of these Products, it is important that you read and follow the instructions below.

**1. GENERAL INSTRUCTIONS**

- 1.1. Scope:** This safety guide is designed to cover general guidelines on the installation, use, and maintenance of Pneumatic Division Valves, FRLs (Filters, Pressure Regulators, and Lubricators), Vacuum products and related accessory components.
- 1.2. Fail-Safe:** Valves, FRLs, Vacuum products and their related components can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of associated valves, FRLs or Vacuum products will not endanger persons or property.
- 1.3. Relevant International Standards:** For a good guide to the application of a broad spectrum of pneumatic fluid power devices see: ISO 4414:1998, Pneumatic Fluid Power – General Rules Relating to Systems. See [www.iso.org](http://www.iso.org) for ordering information.
- 1.4. Distribution:** Provide a copy of this safety guide to each person that is responsible for selection, installation, or use of Valves, FRLs or Vacuum products. Do not select, or use Parker valves, FRLs or vacuum products without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.5. User Responsibility:** Due to the wide variety of operating conditions and applications for valves, FRLs, and vacuum products Parker and its distributors do not represent or warrant that any particular valve, FRL or vacuum product is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
  - Making the final selection of the appropriate valve, FRL, Vacuum component, or accessory.
  - Assuring that all user's performance, endurance, maintenance, safety, and warning requirements are met and that the application presents no health or safety hazards.
  - Complying with all existing warning labels and / or providing all appropriate health and safety warnings on the equipment on which the valves, FRLs or Vacuum products are used; and,
  - Assuring compliance with all applicable government and industry standards.
- 1.6. Safety Devices:** Safety devices should not be removed, or defeated.
- 1.7. Warning Labels:** Warning labels should not be removed, painted over or otherwise obscured.
- 1.8. Additional Questions:** Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to [www.parker.com](http://www.parker.com), for telephone numbers of the appropriate technical service department.

**2. PRODUCT SELECTION INSTRUCTIONS**

- 2.1. Flow Rate:** The flow rate requirements of a system are frequently the primary consideration when designing any pneumatic system. System components need to be able to provide adequate flow and pressure for the desired application.
- 2.2. Pressure Rating:** Never exceed the rated pressure of a product. Consult product labeling, Pneumatic Division catalogs or the instruction sheets supplied for maximum pressure ratings.
- 2.3. Temperature Rating:** Never exceed the temperature rating of a product. Excessive heat can shorten the life expectancy of a product and result in complete product failure.
- 2.4. Environment:** Many environmental conditions can affect the integrity and suitability of a product for a given application. Pneumatic Division products are designed for use in general purpose industrial applications. If these products are to be used in unusual circumstances such as direct sunlight and/or corrosive or caustic environments, such use can shorten the useful life and lead to premature failure of a product.
- 2.5. Lubrication and Compressor Carryover:** Some modern synthetic oils can and will attack nitrile seals. If there is any possibility of synthetic oils or greases migrating into the pneumatic components check for compatibility with the seal materials used. Consult the factory or product literature for materials of construction.
- 2.6. Polycarbonate Bowls and Sight Glasses:** To avoid potential polycarbonate bowl failures:
  - Do not locate polycarbonate bowls or sight glasses in areas where they could be subject to direct sunlight, impact blow, or temperatures outside of the rated range.
  - Do not expose or clean polycarbonate bowls with detergents, chlorinated hydro-carbons, ketones, esters or certain alcohols.
  - Do not use polycarbonate bowls or sight glasses in air systems where compressors are lubricated with fire resistant fluids such as phosphate ester and di-ester lubricants.



## Safety Guide

---

**2.7. Chemical Compatibility:** For more information on plastic component chemical compatibility see Pneumatic Division technical bulletins Tec-3, Tec-4, and Tec-5

- 2.8. Product Rupture:** Product rupture can cause death, serious personal injury, and property damage.
- Do not connect pressure regulators or other Pneumatic Division products to bottled gas cylinders.
  - Do not exceed the maximum primary pressure rating of any pressure regulator or any system component.
  - Consult product labeling or product literature for pressure rating limitations.

### 3. PRODUCT ASSEMBLY AND INSTALLATION INSTRUCTIONS

- 3.1. Component Inspection:** Prior to assembly or installation a careful examination of the valves, FRLs or vacuum products must be performed. All components must be checked for correct style, size, and catalog number. DO NOT use any component that displays any signs of nonconformance.
- 3.2. Installation Instructions:** Parker published Installation Instructions must be followed for installation of Parker valves, FRLs and vacuum components. These instructions are provided with every Parker valve or FRL sold, or by calling 1-800-CPARKER, or at [www.parker.com](http://www.parker.com).
- 3.3. Air Supply:** The air supply or control medium supplied to Valves, FRLs and Vacuum components must be moisture-free if ambient temperature can drop below freezing

### 4. VALVE AND FRL MAINTENANCE AND REPLACEMENT INSTRUCTIONS

- 4.1. Maintenance:** Even with proper selection and installation, valve, FRL and vacuum products service life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a component failure, and experience with any known failures in the application or in similar applications should determine the frequency of inspections and the servicing or replacement of Pneumatic Division products so that products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at minimum, must include instructions 4.2 through 4.10.
- 4.2. Installation and Service Instructions:** Before attempting to service or replace any worn or damaged parts consult the appropriate Service Bulletin for the valve or FRL in question for the appropriate practices to service the unit in question. These Service and Installation Instructions are provided with every Parker valve and FRL sold, or are available by calling 1-800-CPARKER, or by accessing the Parker web site at [www.parker.com](http://www.parker.com).
- 4.3. Lockout / Tagout Procedures:** Be sure to follow all required lockout and tagout procedures when servicing equipment. For more information see: OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – (Lockout / Tagout)
- 4.4. Visual Inspection:** Any of the following conditions requires immediate system shut down and replacement of worn or damaged components:
- Air leakage: Look and listen to see if there are any signs of visual damage to any of the components in the system. Leakage is an indication of worn or damaged components.
  - Damaged or degraded components: Look to see if there are any visible signs of wear or component degradation.
  - Kinked, crushed, or damaged hoses. Kinked hoses can result in restricted air flow and lead to unpredictable system behavior.
  - Any observed improper system or component function: Immediately shut down the system and correct malfunction.
  - Excessive dirt build-up: Dirt and clutter can mask potentially hazardous situations.

**Caution: Leak detection solutions should be rinsed off after use.**

#### 4.5. Routine Maintenance Issues:

- Remove excessive dirt, grime and clutter from work areas.
- Make sure all required guards and shields are in place.

**4.6. Functional Test:** Before initiating automatic operation, operate the system manually to make sure all required functions operate properly and safely.

**4.7. Service or Replacement Intervals:** It is the user's responsibility to establish appropriate service intervals. Valves, FRLs and vacuum products contain components that age, harden, wear, and otherwise deteriorate over time. Environmental conditions can significantly accelerate this process. Valves, FRLs and vacuum components need to be serviced or replaced on routine intervals. Service intervals need to be established based on:

- Previous performance experiences.
- Government and / or industrial standards.
- When failures could result in unacceptable down time, equipment damage or personal injury risk.

**4.8. Servicing or Replacing of any Worn or Damaged Parts:** To avoid unpredictable system behavior that can cause death, personal injury and property damage:

- Follow all government, state and local safety and servicing practices prior to service including but not limited to all OSHA Lockout Tagout procedures (OSHA Standard – 29 CFR, Part 1910.147, Appendix A, The Control of Hazardous Energy – Lockout / Tagout).
- Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
- Disconnect air supply and depressurize all air lines connected to system and Pneumatic Division products before installation, service, or conversion.
- Installation, servicing, and / or conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
- After installation, servicing, or conversions air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or if the product does not operate properly, do not put product or system into use.
- Warnings and specifications on the product should not be covered or painted over. If masking is not possible, contact your local representative for replacement labels.

**4.9. Putting Serviced System Back into Operation:** Follow the guidelines above and all relevant Installation and Maintenance Instructions supplied with the valve FRL or vacuum component to insure proper function of the system.

The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors ("Seller") are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods or work described will be referred to as "Products".

- 1. Terms and Conditions.** Seller's willingness to offer Products, or accept an order for Products, to or from Buyer is subject to these Terms and Conditions or any newer version of the terms and conditions found on-line at [www.parker.com/saleterms/](http://www.parker.com/saleterms/). Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document issued by Buyer.
- 2. Price Adjustments; Payments.** Prices stated on Seller's quote or other documentation offered by Seller are valid for 30 days, and do not include any sales, use, or other taxes unless specifically stated. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and is due 30 days from the date of invoice or such other term as required by Seller's Credit Department, after which Buyer shall pay interest on any unpaid invoices at the rate of 1.5% per month or the maximum allowable rate under applicable law.
- 3. Delivery Dates; Title and Risk; Shipment.** All delivery dates are approximate and Seller shall not be responsible for any damages resulting from any delay. Regardless of the manner of shipment, title to any products and risk of loss or damage shall pass to Buyer upon placement of the products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferral of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.
- 4. Warranty.** Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve months from the date of delivery to Buyer or 2,000 hours of normal use, whichever occurs first. The prices charged for Seller's products are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED HEREUNDER. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**
- 5. Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon delivery. No claims for shortages will be allowed unless reported to the Seller within 10 days of delivery. No other claims against Seller will be allowed unless asserted in writing within 30 days after delivery. Buyer shall notify Seller of any alleged breach of warranty within 30 days after the date the defect is or should have been discovered by Buyer. Any action based upon breach of this agreement or upon any other claim arising out of this sale (other than an action by Seller for an amount due on any invoice) must be commenced within 12 months from the date of the breach without regard to the date breach is discovered.
- 6. LIMITATION OF LIABILITY.** UPON NOTIFICATION, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE. **IN NO EVENT SHALL SELLER BE LIABLE TO BUYER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, EVEN IF SELLER HAS BEEN NEGLIGENT, WHETHER IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.**
- 7. User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.
- 8. Loss to Buyer's Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.
- 9. Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.
- 10. Buyer's Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller shall retain a security interest in the goods delivered and this agreement shall be deemed a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.
- 11. Improper use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any claim, liability, damages, lawsuits, and costs (including attorney fees), whether for personal injury, property damage, patent, trademark or copyright

infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, improper application or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Product; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

- 12. Cancellations and Changes.** Orders shall not be subject to cancellation or change by Buyer for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change product features, specifications, designs and availability with notice to Buyer.
- 13. Limitation on Assignment.** Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.
- 14. Force Majeure.** Seller does not assume the risk and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure") Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.
- 15. Waiver and Severability.** Failure to enforce any provision of this agreement will not waive that provision nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.
- 16. Termination.** Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days written notice of termination. Seller may immediately terminate this agreement, in writing, if Buyer: (a) commits a breach of any provision of this agreement (b) appointments a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or by a third party (d) makes an assignment for the benefit of creditors, or (e) the dissolves or liquidates all or a majority of its assets.
- 17. Governing Law.** This agreement and the sale and delivery of all Products hereunder shall be deemed to have taken place in and shall be governed and construed in accordance with the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.
- 18. Indemnity for Infringement of Intellectual Property Rights.** Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this Agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.
- 19. Entire Agreement.** This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged.
- 20. Compliance with Law, U. K. Bribery Act and U.S. Foreign Corrupt Practices Act.** Buyer agrees to comply with all applicable laws and regulations, including both those of the United Kingdom and the United States of America, and of the country or countries of the Territory in which the Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA") and the U.S. Anti-Kickback Act (the "Anti-Kickback Act"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that they are familiar with the provisions of the U. K. Bribery Act, the FCPA and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer shall not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase products or otherwise benefit the business of Seller.

02/12

Parker Hannifin Corporation  
**Pneumatic Division**

8676 E. M89  
P.O. Box 901  
Richland, MI 49083 USA  
Tel: 269 629 5000  
Fax: 269 629 5385

Applications Engineering  
Phone: 877 321 4PDN Option #2  
E-mail: [pdnapps@parker.com](mailto:pdnapps@parker.com)  
Customer Support  
Phone: 877 321 4PDN Option #1  
E-mail: [pdncustsvc@parker.com](mailto:pdncustsvc@parker.com)  
Web site: [www.parker.com/pneumatics](http://www.parker.com/pneumatics)  
[www.parker.com/watts](http://www.parker.com/watts)

