

STANDARD AND ARCTIC O-RINGS FOR TUBELESS RIMS

O-Rings

- Packaged 2 per poly bag
- 24 O-rings per case
- Consistent product quality
- Manufactured of high-quality material
- O-rings individually marked in an easy-to-read color
- Manufactured to major OEM specifications
- Spliced O-ring with exceptional splice strength
- Extruded product allows diameter variation to meet the wide variety of rim O-ring grooves, both domestic and foreign
- Two compounds for all service conditions:
Standard -40° to 180°F
Arctic -65° to 180°F
- Customized product available for special applications


Part #	Tire Type	Rim Size	Rod Diameter
OR-21-T	Highway	21"	26
OR-25-T	Earthmover	25"	
OR-20-JM	Highway (JM Rim)	20"	
OR-22-JM	Highway (JM Rim)	22"	
OR-24-JM	Highway (JM Rim)	24"	28
OR-215-H	Grader	15"	
OR-217-L	Grader	17"	26
OR-220-TG	Grader	20"	
OR-224-TG	Grader	24"	
OR-225-T	Grader	25"	.375
OR-321-T	Earthmover	21"	
OR-325-T	Earthmover	25"	
OR-329-T	Earthmover	29"	
OR-333-T	Earthmover	33"	
OR-335-T	Earthmover	35"	
OR-339-T	Earthmover	39"	
OR-343-T	Earthmover	43"	
OR-345-T	Earthmover	45"	
OR-349-T	Earthmover	49"	
OR-449-T	Earthmover	49"	.5
OR-451-T	Earthmover	51"	
OR-457-T	Earthmover	57"	
OR-463-T	Earthmover	63"	
OR-469-T	Earthmover	69"	

L-RING SEALS FOR EARTHMOVER RIMS

Proper Use of Haltec L-Ring Seals

The primary purpose of the L-ring seal is to create an air seal where the tire bead and rim bead seat are not completely compatible. Some of the examples where the L-seal will prove useful:

- Where you have an irregular butt weld in the knurled bead seat area.
- Where, during initial inflation, the bead seating is very difficult.
- When an air passage between the bead and the rim is identified.
- Where overloads and severe operating conditions cause the rim deformation (deflection) which can result in air leakage.

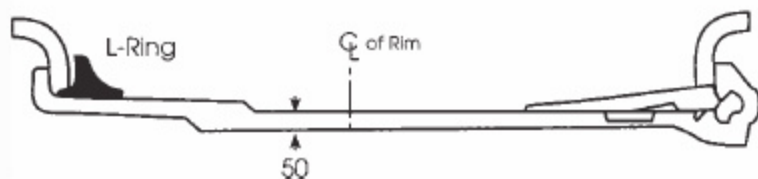

Important Information

- L-Ring Seals are not a cure for damaged beads nor damaged wheels and rims. Caution should be used during all fitments. Do not install where broken bead is suspected.
- Always follow the respective manufacturers' recommendation for proper bead-lubrication and initial air pressure to properly seat beads.
- If you have any questions regarding the use of the L-ring seals, contact Haltec prior to attempting any installation.

Part #	Description
LR-25	25" L-ring seal
LR-29	29" L-ring seal
LR-33	33" L-ring seal
LR-35	35" L-ring seal
LR-39	39" L-ring seal
LR-45	45" L-ring seal
LR-49	49" L-ring seal
LR-51	51" L-ring seal
LR-57	57" L-ring seal
LR-63	63" L-ring seal
LR-69	69" L-ring seal